US 20050076030A1

(19) United States

(12) Patent Application Publication

(10) Pub. No.: US 2005/0076030 A1

(43) Pub. Date: Apr. 7, 2005

Hada et al.

(54) METHOD AND SYSTEM FOR PROVIDING PATH-LEVEL ACCESS CONTROL FOR STRUCTURED DOCUMENTS STORED IN A DATABASE

(75) Inventors: **Satoshi Hada**, Tokyo (JP); **Michiharu Kudo**, Kamakura-shi (JP); **Naishin Seki**, Zama-Shi (JP); **Akihiko Tozawa**, Tokyo (JP); **Robbert C. Van der Linden**, Scotts Valley, CA (US)

Correspondence Address:
JANAH & ASSOCIATES, P.C.
650 DELANCEY STREET
SUITE 106
SAN FRANCISCO, CA 94107 (US)

(73) Assignee: **International Business Machines Corporation**

(21) Appl. No.: **10/651,691**

(22) Filed: **Aug. 29, 2003**

Publication Classification

(51) Int. Cl.[7] G06F 7/00

(52) U.S. Cl. 707/9

(57) **ABSTRACT**

An improved method and system for providing path-level access control to a structured document in a collection stored in a database, where the structured document includes a plurality of nodes is disclosed. The method includes the steps of providing an access control policy for the collection, where the access control policy comprises a plurality of access control rules, generating a path for each node of the plurality of nodes in the document, and generating for each path associated with a node a corresponding value expression based on at least one access control rule of the plurality of access control rules. According to the method and system of the present invention, the corresponding value expression is utilized during access control evaluation to determine whether a user is allowed to access a node in the structured document.

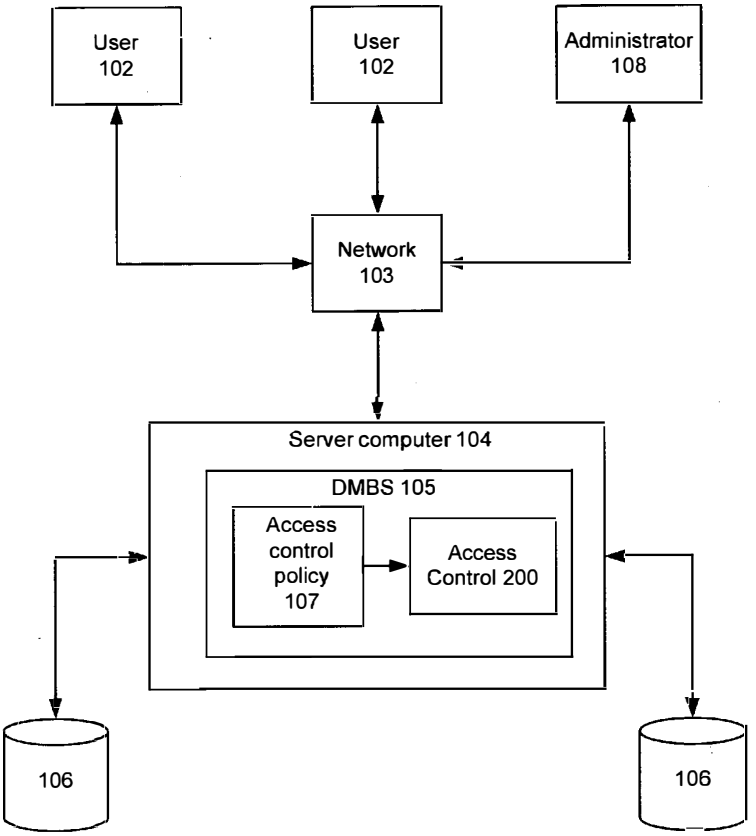

100

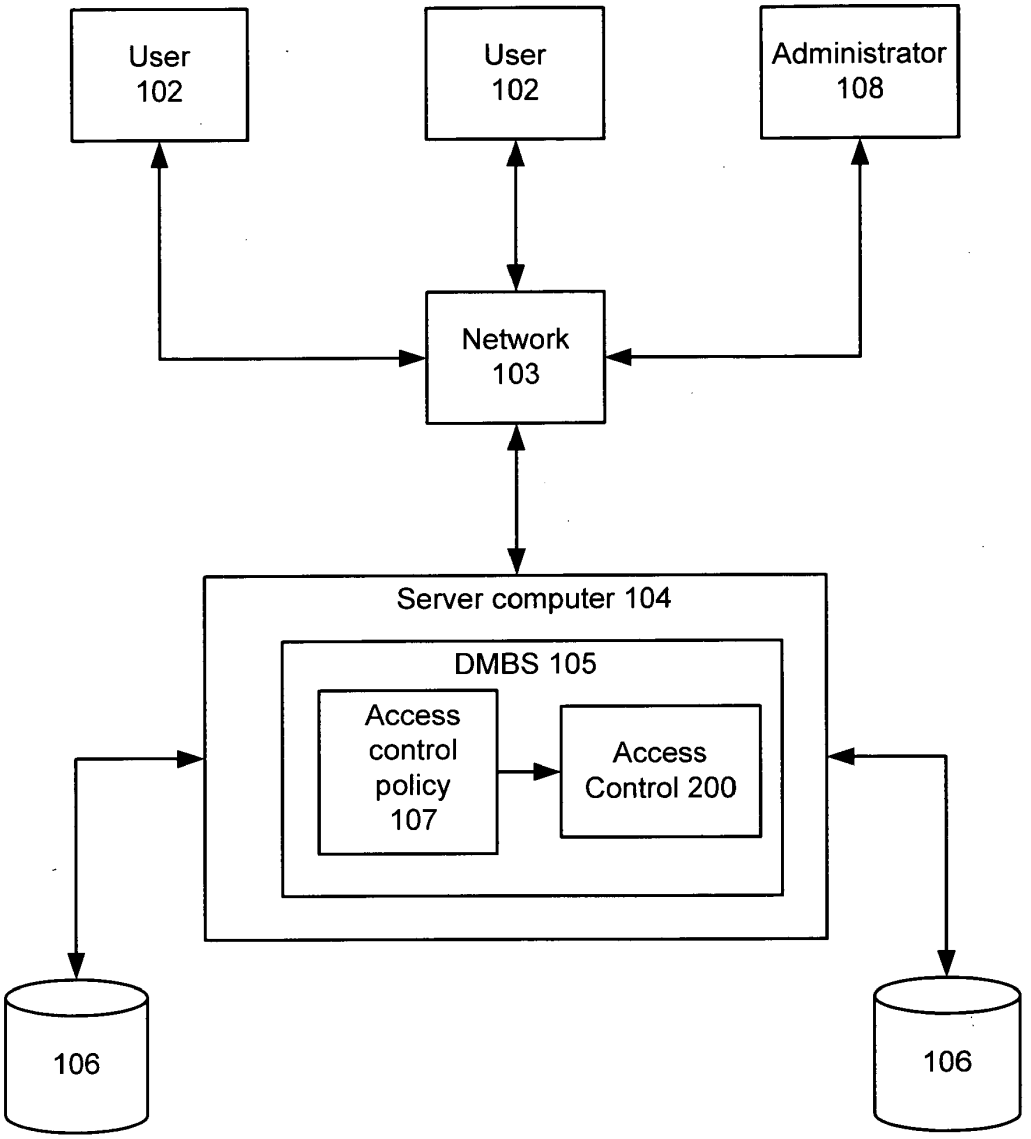
User
102
User
102
Administrator
108
Network
103
Server computer 104
DMBS 105
Access
control
policy
107
Access
Control 200
106
106

100

FIG. 1

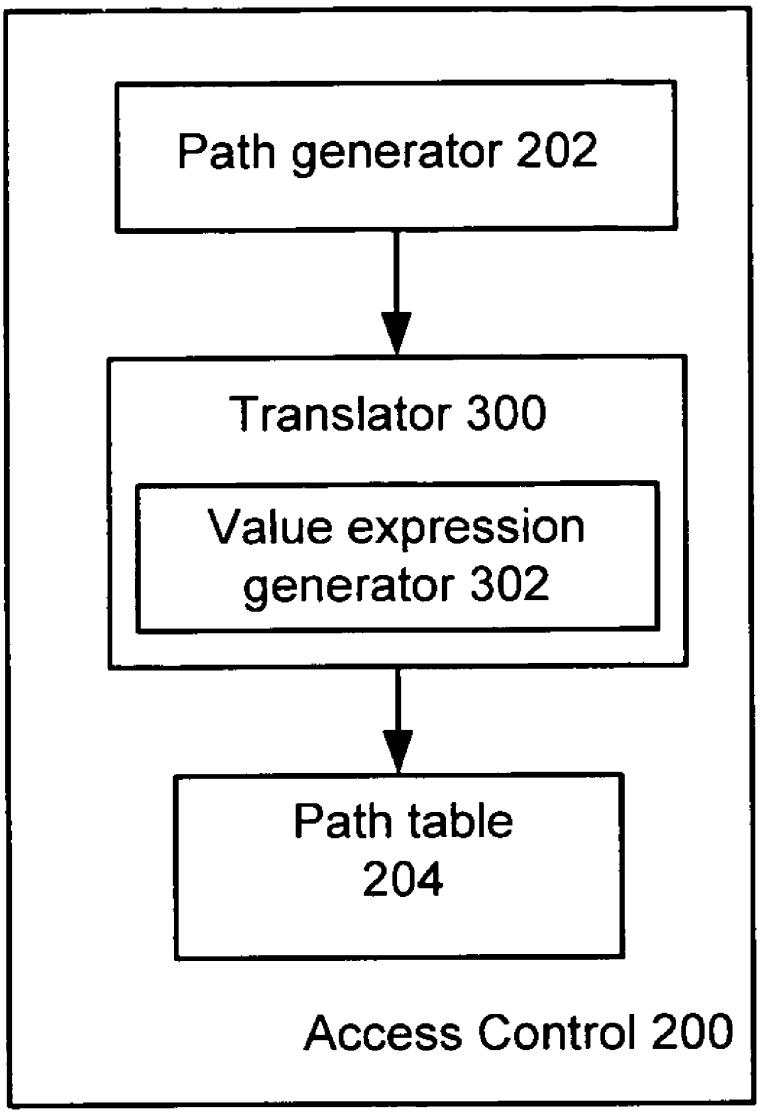
Path generator 202
Translator 300
Value expression generator 302
Path table 204
Access Control 200

FIG. 2

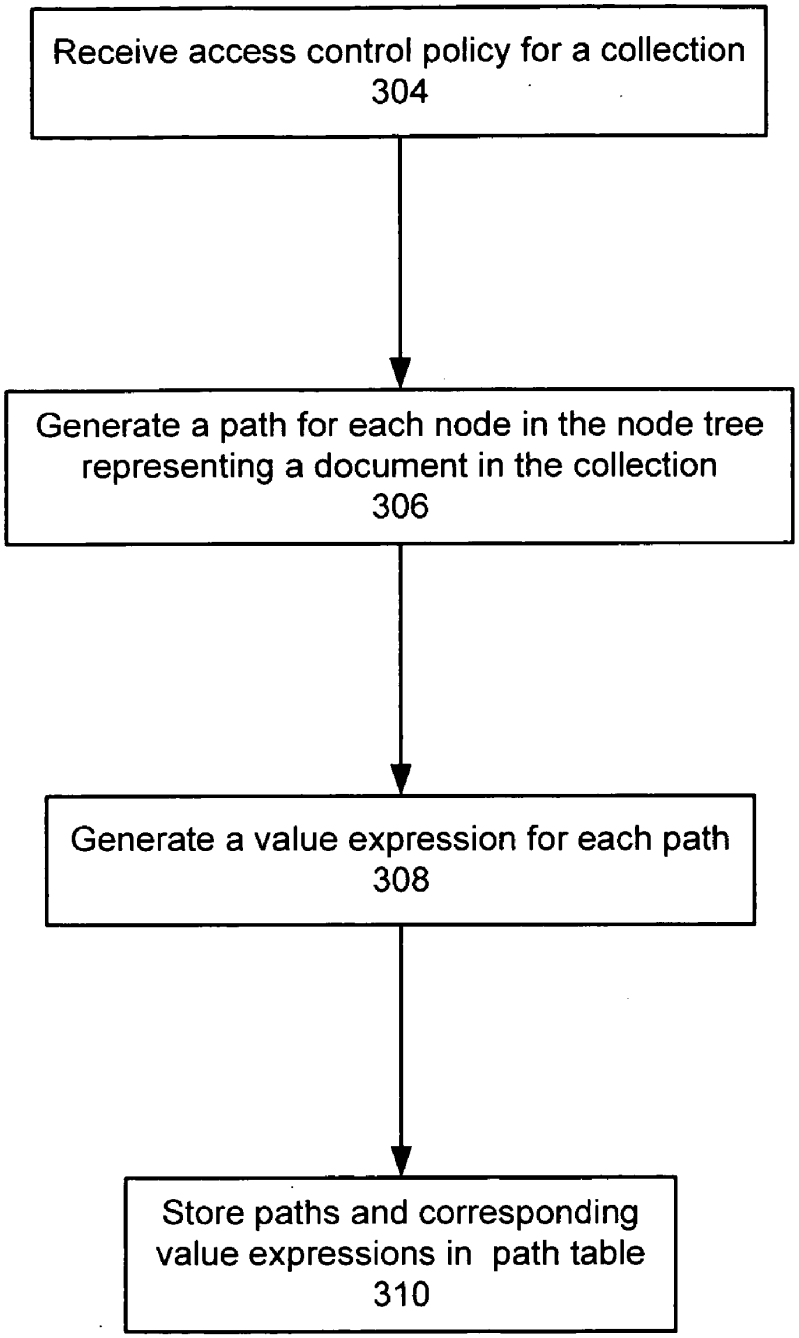
Receive access control policy for a collection
304
Generate a path for each node in the node tree representing a document in the collection
306
Generate a value expression for each path
308
Store paths and corresponding value expressions in path table
310

FIG. 3

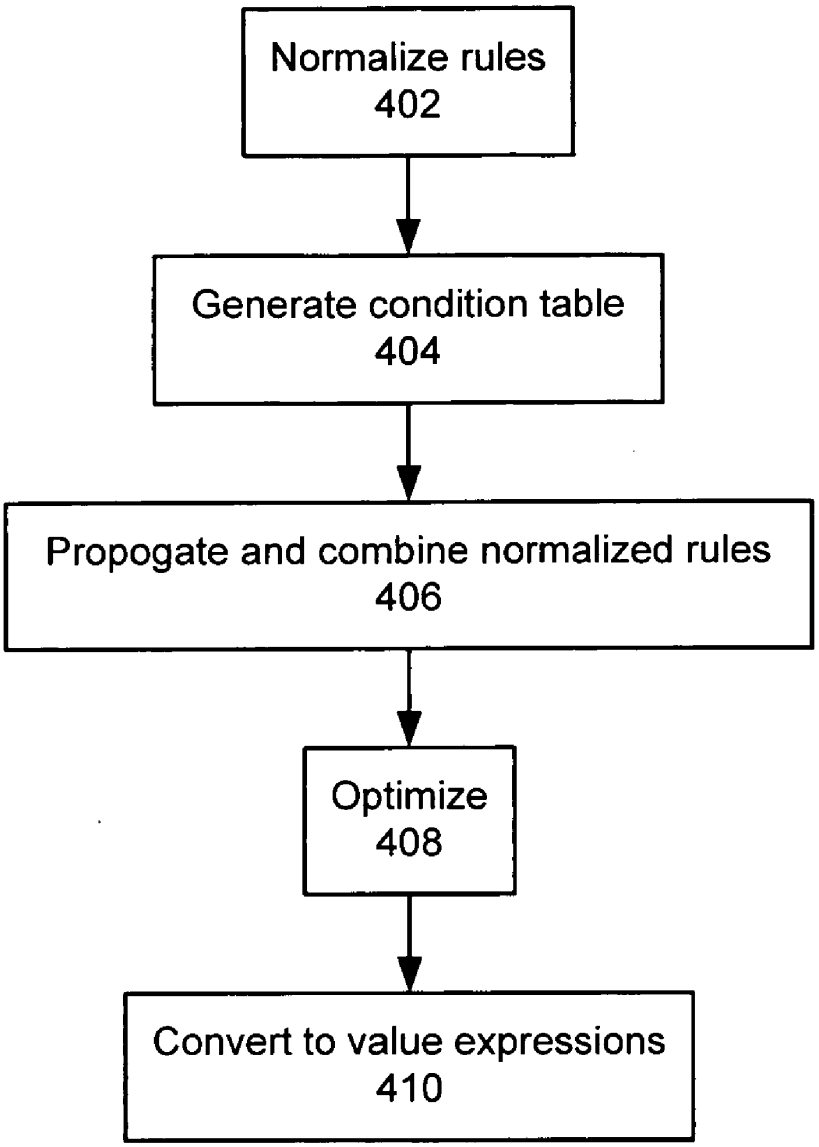
Normalize rules
402
Generate condition table
404
Propogate and combine normalized rules
406
Optimize
408
Convert to value expressions
410

FIG. 4

ConditionID 502	Condition Expression 504
C1	equal($Group, Admin) & xpath(/bib/book[@title= "security"])
C2	…

500

FIG. 5

Path 602	Value Expression 604
/bib	[$User='Murata' or $User='Seki' or $User='Tozawa']
/bib/@ver	[$User='Murata']
/bib/text()	[$User='Murata' or $User='Seki']
/bib/book	[($User='Murata' or $User='Tozawa') and not($User='Hada')]
/bib/book/text()	[$User='Murata' and not($User='Hada')]
/bib/book/@year	[$User='Murata' and not($User='Hada')]
/bib/book/title	if !p then [ref(1, ../)]
/bib/book/title/text()	if !p then [ref(1, ../../)]

600

FIG. 6

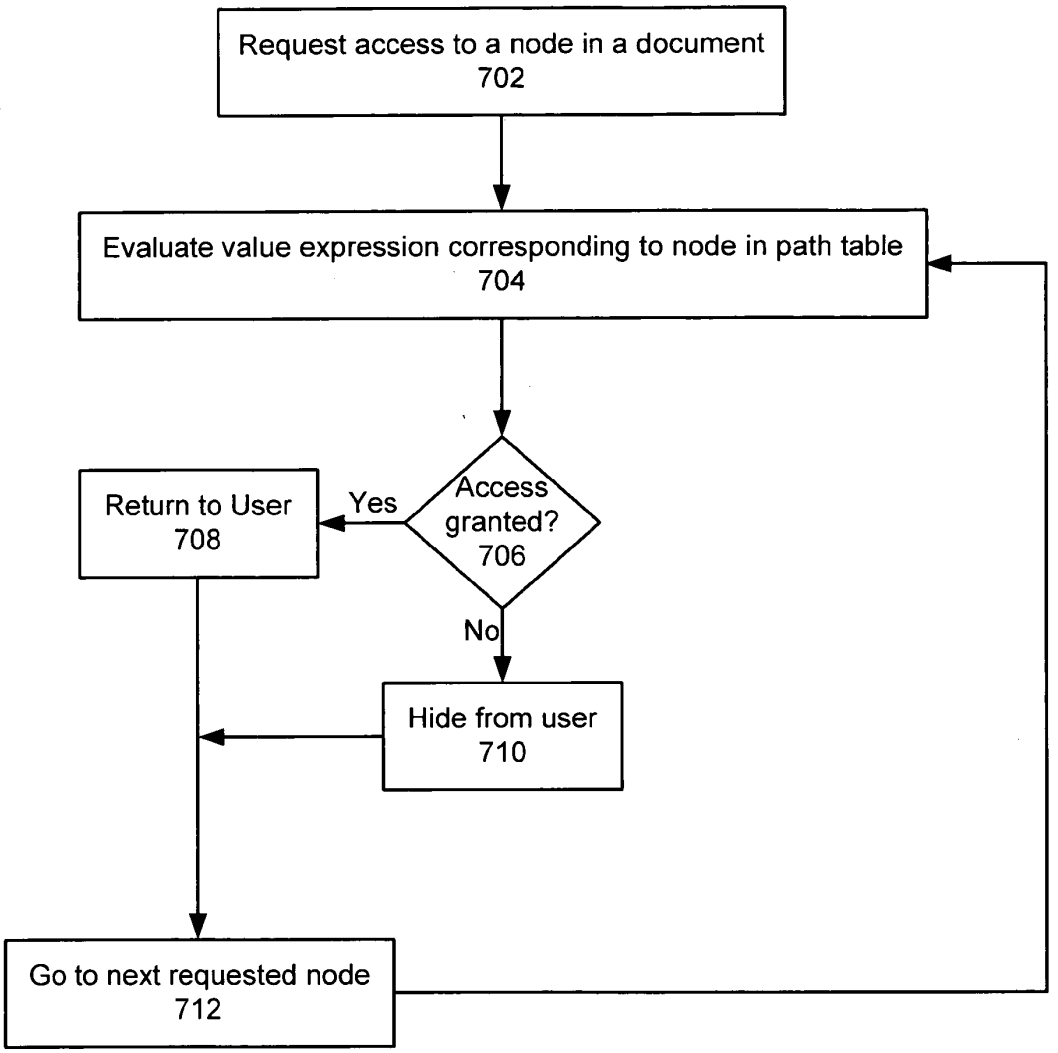
Request access to a node in a document
702
Evaluate value expression corresponding to node in path table
704
Access granted?
706
Yes
Return to User
708
No
Hide from user
710
Go to next requested node
712

700

FIG. 7

METHOD AND SYSTEM FOR PROVIDING PATH-LEVEL ACCESS CONTROL FOR STRUCTURED DOCUMENTS STORED IN A DATABASE

FIELD OF THE INVENTION

[0001] The present invention relates generally to computer implemented database systems and, more particularly, to a method and system for providing path-level access control for structured documents stored in a database system.

BACKGROUND OF THE INVENTION

[0002] Structured documents are documents which have nested structures. Documents written in Extensible Markup Language (XML) are structured documents. XML is quickly becoming the standard format for delivering information over the Internet because it allows the user to design a customized markup language for many classes of structure documents. For example, a business can easily model complex structures such as purchase orders in XML form and send them for further processing to its business partners. XML supports user-defined tabs for better description of nested document structures and associated semantics, and encourages the separation of document content from browser presentation.

[0003] As more and more businesses present and exchange data in XML documents, database management systems (DBMS) have been developed to store, query and retrieve these documents which are typically stored on direct access storage devices (DASD), such as magnetic or optical disk drives for semi-permanent. Some DBMSs, known as relational databases, store and query the documents utilizing relational techniques, while other DBMSs, known as native databases, store the documents in their native formats. XML documents are typically grouped into a collection of similar or related documents. Thus, for example, a group of purchase orders can form a collection.

[0004] Once a collection of documents is stored in the database, relational or native, it is potentially available to large numbers of users. Therefore, data security becomes a crucial concern. In particular, the DBMS must be able to control, i.e., deny or grant, access to the data by the user. In a conventional relational DBMS where the data is stored in rows and columns in tables, security is generally directed to the table level, i.e., access to a table is controlled. While this may be sufficient for relational data, it is inadequate for controlling access to a collection of XML documents because an XML document stored in the database contains information that is much more diverse than data stored in rows in tables.

[0005] Access control for XML documents is fine-grained, that is, access to each node in an XML document is controlled. The term "node" is used in the DOM-sense, which is a standard XML construct well known to those skilled in the art. In that construct, the XML document is represented by a plurality of nodes that form a hierarchical node tree. Each node of the XML document is identified by a path that defines a hierarchical relationship between the node and its parent node(s). Thus, fine-grained access control to the nodes of an XML document is referred to as path-level access control.

[0006] For example, if an administrator wanted to limit access to a "salary" node in all documents in a collection "all_employees," the administrator would generate the following statement:

[0007] Deny read access on "/employee/salary" in collection "all_employees" to group non-managers

[0008] This statement would deny access to all salary nodes with path "/employee/salary" in all documents in collection "all_employees." This type of statement is referred to as an access control rule. A set of access control rules directed to a collection of documents is referred to as an access control policy.

[0009] While it is possible to perform path-level access control evaluation by utilizing access control rules, such evaluation is relatively expensive because the DBMS must evaluate each access control rule to determine whether a user should be granted or denied access to data in a node. This process becomes prohibitive when the number of access control rules in a policy increases. Nevertheless, the alternative, i.e., coarse-grained access control or table level access control, is unacceptable.

[0010] Accordingly, a need exists for an improved method and system for providing path-level access control for structured documents stored in a database. The method and system should be integrated (or capable of being integrated) with an existing database system in order to use the existing resources of the database system. The present invention addresses such a need.

SUMMARY OF THE INVENTION

[0011] The present invention is directed to an improved method and system for providing path-level access control to a structured document in a collection stored in a database, where the structured document comprises a plurality of nodes. The method includes providing an access control policy for the collection, where the access control policy comprises a plurality of access control rules, generating a path for each node of the plurality of nodes in the document, and generating for each path associated with a node a corresponding value expression based on at least one of the plurality of access control rules. According to the method and system of the present invention, the corresponding value expression is utilized during access control evaluation to determine whether a user is allowed to access a node in the structured document.

[0012] Through the aspects of the present invention, an Access Control mechanism in the DBMS receives the access control policy for the structured document in the collection and generates for each of the paths associated with the nodes in the document a value expression. The value expression is an executable statement which describes the access control rule for that path, i.e., who is granted or denied access to data in that path. Because the value expression is easier to process than the access control policy, access control evaluation and processing is more efficient and faster.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] **FIG. 1** is a block diagram of an exemplary computer environment for use with the present invention.

[0014] **FIG. 2** is a block diagram of the Access Control mechanism according to the preferred embodiment of the present invention.

[0015] **FIG. 3** is a flowchart illustrating a process for providing path-level access control to structured documents stored in a database according to a preferred embodiment of the present invention.

[0016] **FIG. 4** is a flowchart illustrating a process for generating value expressions according to a preferred embodiment of the present invention.

[0017] **FIG. 5** illustrates a condition table according to a preferred embodiment of the present invention.

[0018] **FIG. 6** illustrates a path table according to a preferred embodiment of the present invention.

[0019] **FIG. 7** is a flowchart illustrating a process for utilizing value expressions during access control evaluation according to a preferred embodiment of the present invention.

DETAILED DESCRIPTION

[0020] The present invention relates generally to computer implemented database systems and, more particularly, to an improved method and system for providing path-level access control for structured documents stored in a database. The following description is presented to enable one of ordinary skill in the art to make and use the invention and is provided in the context of a patent application and its requirements. Various modifications to the preferred embodiment and the generic principles and features described herein will be readily apparent to those skilled in the art. For example, the following discussion is presented in the context of a DB2® database environment available from IBM® Corporation. It should be understood that the present invention is not limited to DB2 and may be implemented with other database management systems. Thus, the present invention is to be accorded the widest scope consistent with the principles and features described herein.

[0021] According to a preferred embodiment of the present invention, a structured document is parsed into a plurality of nodes that form a node tree. Each node is then associated with a path that describes the node's hierarchical relationship to its parent node(s). A translator receives an access control policy for the structured document that comprises at least one access control rule, and generates for each path a corresponding value expression based on the access control policy. The value expression is a simple statement granting or denying access to the node associated with the path. In a preferred embodiment, the value expressions for the structured document are compiled resulting in a set of mini-plans that can be efficiently executed at runtime by the DBMS.

[0022] When a user issues a query on a certain node in the structured document, the DBMS navigates to the certain node and evaluates the corresponding value expression, as opposed to the access control rule(s) in the access control policy, to determine whether the user is authorized to access the certain node. Because the value expression is less complex than the access control rule(s), evaluation by the DBMS is more efficient and faster. Moreover, according to another preferred embodiment of the present invention, access control is evaluated during runtime, as opposed to compile time, thereby allowing an administrator to change the access control policy at runtime without having to recompile the query.

[0023] To describe further the present invention, please refer to **FIG. 1**, which is an exemplary computer environment for use with the present invention. In **FIG. 1**, a typical distributed computer system utilizes a network **103** to connect client computers **102** executing client applications to a server computer **104** executing software and other computer programs, and to connect the server computer **104** to data sources **106**. These systems are coupled to one another by various networks, including LANs, WANs, and the Internet. Each client computer **102** and the server computer **104** additionally comprise an operating system and one or more computer programs (not shown).

[0024] The server computer **104** uses a data store interface (not shown) for connecting to the data sources **106**. The data store interface may be connected to a database management system (DBMS) **105**, which supports access to the data store **106**. The DBMS **105** can be a relational database management system (RDBMS), such as the DB2® system developed by IBM Corporation, or it also can be a native XML database system. The interface and DBMS **105** may be located at the server computer **104** or may be located on one or more separate machines. The data sources **106** may be geographically distributed.

[0025] The DBMS **105** and the instructions derived therefrom are all comprised of instructions which, when read and executed by the server computer **104** cause the server computer **104** to perform the steps necessary to implement and/or use the present invention. While the preferred embodiment of the present invention is implemented in the DB2® product offered by IBM Corporation, those skilled in the art will recognize that the present invention has application to any DBMS, whether or not the DBMS **105** is relational or native. Moreover, those skilled in the art will recognize that the exemplary environment illustrated in **FIG. 1** is not intended to limit the present invention, and that alternative environments may be used without departing from the scope of the present invention.

[0026] According to the preferred embodiment of the present invention, the DBMS **105** includes access control policies **107** that are authored by an administrator **108** or some other authorized personnel. Each access control policy **107** describes the security rules pertaining to data stored in the database. The DBMS **105** also comprises an Access Control mechanism **200** that provides path-level access control to structured documents stored on disk. Storing data "on disk" refers to storing data persistently, for example, in the data store **106**.

[0027] **FIG. 2** is a block diagram of the Access Control mechanism **200** according to the preferred embodiment of the present invention. The Access Control mechanism **200** comprises a path table generator **202**, a translator **300** and a path table **204**. Each component will be described in further detail in conjunction with **FIG. 3**.

[0028] **FIG. 3** is a flowchart illustrating a method for providing path-level access control to structured documents stored in the database according to a preferred embodiment of the present invention. In step **304**, the Access Control mechanism **200** receives or retrieves an access control policy **107** pertaining to a collection of structured documents. In a preferred embodiment, the Access Control mechanism **200** receives the control policy **107** immediately after the administrator **108** has written and validated it. In

another preferred embodiment, the control policy **107** can be stored in a repository in the DBMS **105**, and retrieved by the Access Control mechanism **200** at a time after authorship.

[**0029**] The access control policy **107** for the collection comprises a plurality of access control rules. Each access control rule typically defines a subject to which the rule applies, an action and a path. The subject can be a user's name or a group of users. The action can be, but is not limited to, a read, an update, a create or a delete action. The path identifies the node to which the rule applies. For example, the following access control rule:

[**0030**] </bib/book/title, {Murata}, +read>

[**0031**] provides that the user Murata is allowed to read information at the title element node described by the path "/bib/book/title." The access control rule can also include predicates such that access to a particular node can be data-dependent. The access control rules are presumably syntactically correct and logically valid when they are received by the Access Control mechanism **200**. Alternatively, the Access Control mechanism **200** can be configured to evaluate the access control policy **107** and validate it.

[**0032**] Referring again to **FIG. 3**, once the access control policy **107** has been received by the Access Control mechanism **200**, the path generator **202** generates a path for each node in a node tree representing a structured document in the collection in step **306**. As stated above, it is well known to those skilled in the art that a structured document can be represented as a plurality of nodes forming a hierarchical node tree. Thus, for example, suppose a structured document, S**1**, is as follows:

```
<Questionnaire>
    <Name> Alice </Name>
    <Questions>
        <Q1> Yes </Q1>
        <Q2> No </Q2>
    </Questions>
<Questionnaire>
```

[**0033**] The node tree would comprise the following element nodes:

```
                    |-------- Name
                    |
Questionnaire-------|
                    |                    |-------Q2
                    |-------- Questions----|
                                         |-------Q1
```

[**0034**] The path to element node Q**1** is:

[**0035**] /Questionnaire/Questions/Q**1**

[**0036**] Referring again to **FIG. 3**, once the paths have been generated, the access control policy **107** and paths are passed to the translator **300**, where in step **308**, a value expression for each path is generated. In a preferred embodiment, the value expression for a path is an executable statement regarding who, if anyone, has access to the node associated with the path. The value expression represents a combination of all access control rules that affect the node. The process by which the translator **300** generates the value expressions is illustrated in **FIG. 4**.

[**0037**] Referring now to **FIG. 4**, the process begins by normalizing each of the access control rules that make up the access control policy **107** in step **402**. In a preferred embodiment, each access control rule is transformed into a normalized rule format that includes a head, a path expression, and a condition. The head indicates whether an action is granted or denied, the path expression describes the path associated with the node, and the condition indicates to whom the rule applies and under what circumstances. For example, the following access control rule:

[**0038**] </bib/book[@title="security"], GROUP Admin, +read>

[**0039**] is transformed into:

[**0040**] (grant_read, '/bib/book', equal($Group, Admin) & xpath(/bib/book[@title="security"])

[**0041**] The above format is called a normalized rule. After this step is finished, a set of normalized access control rules is generated.

[**0042**] Next, in step **404**, the translator **300** generates and populates a condition table. **FIG. 5** illustrates a condition table **500** according to a preferred embodiment of the present invention. The condition table **500** comprises a ConditionID column **502** and a Condition Expression column **504**. The Condition Expression column **504** contains the third argument of each normalized rule, i.e., the condition, while the ConditionID column **502** contains an identifier associated with the condition. The translator **300** replaces the third argument of each normalized rule with the ConditionID corresponding to the condition to form a modified normalized rule.

[**0043**] Referring again to **FIG. 4**, after the condition table has been generated, the translator **300** propagates each modified normalized rule through each path generated by the path generator **202** (in step **306** of **FIG. 3**) in step **406**. Propagation refers to how an access control rule associated with a particular node affects access to ancestor and descendant nodes. In general, propagation has two modes: up and down. Propagation-up refers to when an access control rule associated with a particular node propagates upward toward its ancestor nodes, while propagation-down refers to when an access control rule propagates downward toward its descendant nodes. Whether an access control rule propagates up or down depends on a set of propagation rules. The following table illustrates a set of propagation rules according a preferred embodiment of the present invention:

TABLE 1

Action	Effect	Mode	Semantics
Read	Grant	Down	Rule specified to any node propagates down.
		Up	Every GRANT for read-access propagates up to all ancestor elements (but not including the attributes and text nodes of these ancestor elements).
	Deny	Down	Rule specified to any node propagates down.
		Up	No propagation
Update	Grant	Down	Every GRANT for update-access propagates down to all the attributes and text nodes.

TABLE 1-continued

Action	Effect	Mode	Semantics
		Up	No propagation
	Deny	Down	No propagation
		Up	No propagation
Create	Grant	Down	No propagation
		Up	No propagation
	Deny	Down	No propagation
		Up	No propagation
Delete	Grant	Down	No propagation
		Up	No propagation
	Deny	Down	No propagation
		Up	No propagation

[0044] The propagation rules above are illustrative and not exclusive. Those skilled in the art recognize that different propagation rules can be implemented, and that the method and system of the present invention is not limited thereby.

[0045] In step **406**, for each modified normalized rule, the translator **300** applies the propagation rules and identifies each path that is affected by the modified normalized rule. For example, if the modified normalized rule associated with a node is a "GRANT read" to user A, the modified normalized rule propagates up and down from the node. User A has "read" access to all descendant nodes and to all ancestor element nodes. Thus, the translator **300** identifies the paths associated with the descendant and ancestor element nodes as being accessible by user A. If more than one modified normalized rule affects a particular path, those rules are combined for the path in step **406**.

[0046] Next, in step **408**, the translator **300** optimizes the rules by minimizing repeated value expressions in the output. In a preferred embodiment, reference notations and supplemental value expressions are used to optimize the rules. For the reference notation, the translator **300** compares the ConditionID specified for a path associated with a node to the ConditionID of the path associated with its parent node. If the ConditionIDs are identical, then the ConditionID in the child node is replaced with "ref(1, . . . /)" indicating that the condition for the child node is identical to the condition of the parent node and therefore, there is no need to reevaluate the value expression for the child. In the case of a sibling reference, "ref(2, . . . /sibling-node)" is used to express the reference while " . . . /sibling-node" is the relative path.

[0047] A supplemental value expression is an additional value expression associated with a path that describes the access rule for any descendant path that exists or may exist in the future. For example, if user B has read access on path "a/b," then according to the propagation rules presented in Table 1, user B has read access to any descendant path associated with a node (descendant path/node) under "a/b." A descendant path/node may exist (i.e., a path and value expression has been generated for the descendent node) or it may not yet exist because, for example, a document containing this path has not yet been added to the collection and processed by the Access Control mechanism **200**. In this case, the translator **300** generates a supplemental value expression for path "a/b" that indicates that user B has read access to any descendent path/node. Thus, if and when a new descendant path/node is introduced, there is no need to generate a value expression for the new path.

[0048] Those skilled in the art will readily appreciate that utilizing reference notations and supplemental value expressions are but two ways to optimize the rules. Other techniques can be utilized to further optimize the rules.

[0049] After optimization, a value expression generator **302** transforms each modified normalized access control rule into a value expression for the path, via step **410**. In a preferred embodiment, the value expression generator **302** does two things: a syntactical conversion and an addition of a "!p" notation. For the syntactical conversion, each condition expression is transformed into syntax defined as XPath step qualifier. For example, a condition expression:

[0050] equal($Group, Admin) & xpath(/bib/book [@year=2000])

[0051] is transformed into:

[0052] [$Group='Admin' and @year=2000] for the path "/bib/book".

[0053] For the "!p" notation, the value expression generator **304** generates "!p" notation wherever the reference notation is specified. For example, if ref(1, . . . /) is specified at "/bib/book/title", then the value expression is extended to "if !p then [ref(1, . . . /)]". When compiled and executed, the "!p" notation indicates to the DBMS **105** that the value expression for that path is the same as that for the path of the parent node and therefore, the DBMS **105** does not need to reevaluate the value expression if access to the parent has already been granted. After step **410** is finished, a value expression is generated for each path.

[0054] The above described value expression generation process can further be described through the following simple example. Suppose the following XML document is representative of a collection:

```
<bib ver="1.0">
  <book year="1994">
    <title>TCP/IP Illustrated</title>
    <author>Alice</author>
  </book>
  <book year="2002">
    <title>Advanced Programming in the Java environment</title>
  </book>
</bib>
```

[0055] and the following rules make up the access control policy for the collection:

```
Rule 1: </bib, {Murata}, +read>
Rule 2: </bib/@ver, {Seki}, +read>
Rule 3: </bib/book, {Hada}, −read>
Rule 4: </bib/book/title, {Tozawa}, +read>
```

[0056] Rule Normalization (Step **402**)

[0057] Here, rules 1-4 are transformed into normalized rules. Each normalized rule includes a head, a path expression and a condition. The normalized rules are as follows:

```
Rule 1 : (grant_read, /bib, equal($User, Murata))
Rule 2 : (grant_read, /bib/@ver, equal($User, Seki))
Rule 3 : (deny_read, /bib/book, equal($User, Hada))
Rule 4 : (grant_read, /bib/book/title, equal($User, Tozawa))
```

[0058] Condition Table Generation (Step **404**)

[0059] Next, the translator **300** generates and populates the following condition table:

ConditionID	Condition Expression
C1	equal($User, Murata)
C2	equal($User, Seki)
C3	equal($User, Hada)
C4	equal($User, Tozawa)

[0060] The translator **300** then converts the normalized rules into the following modified normalized rules:

```
Rule 1 : (grant_read, /bib, C1)
Rule 2 : (grant_read, /bib/@ver, C2)
Rule 3 : (deny_read, /bib/book, C3)
Rule 4 : (grant_read, /bib/book/title, C4)
```

[0061] Rule Propagation and Combination (Step **406**):

[0062] Here, each rule is propagated through each path in the node tree (generated by the path generator **202** in step **306** of **FIG. 3**) according to the propagation rules in Table 1 above. The output of the propagation of the rule through a path is a statement indicating whether a user is granted or denied access to the path, and in turn, to the node. Thus, when each rule is propagated through each path making up the representative document, the resulting evaluation can be presented as follows:

```
Rule 1 (grant_read, /bib, C1)

/bib                    : C1
/bib/@ver               : C1
/bib/text( )            : C1
/bib/book               : C1
/bib/book/text( )       : C1
/bib/book/@year         : C1
/bib/book/title         : C1
/bib/book/title/text( ) : C1
Rule 2 (grant_read, /bib/@ver, C2)

/bib                    : C1, C2
/bib/@ver               : C1, C2
/bib/text( )            : C1
/bib/book               : C1
/bib/book/text( )       : C1
/bib/book/@year         : C1
```

-continued

```
/bib/book/title         : C1
/bib/book/title/text( ) : C1
Rule 3 (deny_read, /bib/book, C3)

/bib                    : C1, C2
/bib/@ver               : C1, C2
/bib/text( )            : C1
/bib/book               : C1, {C3}
/bib/book/text( )       : C1, {C3}
/bib/book/@year         : C1, {C3}
/bib/book/title         : C1, {C3}
/bib/book/title/text( ) : C1, {C3}
Rule 4 (grant_read, /bib/book/title, C4)

/bib                    : C1, C2, C4
/bib/@ver               : C1
/bib/text( )            : C1, C2
/bib/book               : C1, C4, {C3}
/bib/book/text( )       : C1, {C3}
/bib/book/@year         : C1, {C3}
/bib/book/title         : C1, C4, {C3}
/bib/book/title/text( ) : C1, C4, {C3}
```

Note: { } indicates that a condition inside the parenthesis implies negative permission.

[0063] Optimization (Step **408**)

[0064] Here, reference notations are used to minimize repetitive outputs.

```
/bib                    : C1|C2|C4
/bib/@ver               : C1
/bib/text( )            : C1|C2
/bib/book               : (C1|C4)&!C3
/bib/book/text( )       : C1&!C3
/bib/book/@year         : C1&!C3
/bib/book/title         : ref(1, ../)
/bib/book/title/text( ) : ref(1, ../../)
```

[0065] Value Expression Generation (Step **410**)

[0066] Here, each output statement is transformed into a value expression based on the condition expression in the condition table. A value expression is created for each path.

```
/bib                    : [$User='Murata' or $User='Seki' or
                          $User='Tozawa']
/bib/@ver               : [$User='Murata']
/bib/text( )            : [$User='Murata' or $User='Seki']
/bib/book               : [($User='Murata' or $User='Tozawa') and
                          not($User='Hada')]
/bib/book/text( )       : [$User='Murata' and not($User='Hada')]
/bib/book/@year         : [$User='Murata' and not($User='Hada')]
/bib/book/title         : if !p then [ref(1, ../)]
/bib/book/title/text( ) : if !p then [ref(1, ../../)]
```

[0067] Referring again to **FIG. 3**, after the value expressions have been generated, the Access Control mechanism **200** stores the paths and corresponding value expressions in the path table **204** in step **310**. **FIG. 6** illustrates a path table **600** for the collection of documents and the access control policy according to the example described above. As is shown, the table **600** comprises a path column **602** and a value expression column **604**. The path column **602** contains the path to each node in the structured document and the

value expression column **604** contains the value expression. In a preferred embodiment of the present invention, the value expressions are compiled before they are stored in the path table **204**. The result is a set of mini-plans that can be efficiently executed by the DBMS **105** at runtime to perform access control checking.

[**0068**] To describe further how the value expressions are utilized by the DBMS **105** during access control evaluation at runtime, please refer now to **FIG. 7**, which is a flowchart illustrating a process **700** for utilizing value expressions according to a preferred embodiment of the present invention. The process begins in step **702** when a user requests access, e.g., to read, to a node in a structured document in a collection. The request is typically in the form of a query that is written in Xquery or any other query language appropriate for querying structured documents. Typically, the DBMS **105** compiles the query during compile time and then executes the compiled query during run time. The DBMS **105** returns the structured document(s), or portions thereof, satisfying the query.

[**0069**] According to a preferred embodiment of the present invention, during the execution of the query (during run time), the DBMS **105** performs an access control check to determine whether the user is authorized to access the requested node. The DBMS **105** does this by accessing the path table **204** in the Access Control mechanism **200** and evaluating the value expression corresponding to the path for the requested node in step **704**. If the value expression indicates that access is granted to the user (step **706**), the DBMS **105** returns the document with the requested data viewable to the user in step **708**. If, however, access is denied, the DBMS **105** returns the document with the requested data hidden from the user in step **710**. In step **712**, a next requested node is evaluated and steps **704** to **710** are repeated.

[**0070**] According to the preferred embodiment of the present invention, the Access Control mechanism **200** of the present invention controls how the structured document appears to the user when it is returned in a result set. The data to which the user is granted access is displayed, whereas that to which the user is denied access is hidden. Thus, path-level access control prevents the user from gaining access to portions of a document. For example, consider the representative document used in the example above and the access control rules (Rules 1-4) associated therewith. A request from user Hada to read the document (/bib) would result in the following output:

[**0071**] <bib ver="1.0">

[**0072**] </bib>.

[**0073**] The paths "/bib/book,""/bib/book/text( ),""/bib/book/@year,""/bib/book/title" and "/bib/book/title/text( )" are hidden from user Hada because Rule **3** denies Hada read access to the path "/bib/book."

[**0074**] Through the aspects of the present invention, path-level access control to a structured document in a collection is improved by transforming an access control policy for the collection into a set of value expressions. According to the preferred embodiment of the present invention, one value expression is generated for each path associated with a node in the structured document. The value expression is a simple statement indicating who, if anyone, has access to the node associated with the path.

[**0075**] Thus, during access control evaluation, the DBMS **105** checks the value expression corresponding to the requested node/path, as opposed to evaluating the access control policy.

[**0076**] By evaluating value expressions instead of the access control policy, access control evaluation is more efficient and fast. Moreover, because access control evaluation is performed during run time, as opposed to compile time, changes to security can be implemented without recompiling the query. In addition, by performing access control evaluation during run time, the DBMS **105** is able to hide data in a document. Although the present invention has been described in accordance with the embodiments shown, one of ordinary skill in the art will readily recognize that there could be variations to the embodiments and those variations would be within the spirit and scope of the present invention. Accordingly, many modifications may be made by one of ordinary skill in the art without departing from the spirit and scope of the appended claims.

What is claimed is:

1. A method for providing path-level access control to a structured document in a collection stored in a database, wherein the structured document comprises a plurality of nodes, comprising the steps of:

a) providing an access control policy for the collection, wherein the access control policy comprises a plurality of access control rules;

b) generating a path for each node of the plurality of nodes in the document; and

c) generating for each path associated with a node a corresponding value expression based on at least one access control rule of the plurality of access control rules,

wherein the corresponding value expression is utilized during access control evaluation to determine whether a user is allowed to access a node in the structured document.

2. The method of claim 1, wherein the value expression is an executable statement indicating who is granted or denied access to the corresponding path associated with the node.

3. The method of claim 1 further comprising:

(d) storing each path and the corresponding value expression in a table.

4. The method of claim 3 further comprising:

(e) compiling each value expression prior to storing step (d).

5. The method of claim 4 further comprising:

(f) receiving a query from a user, wherein the query requests access to a node in the document;

(g) executing the query;

(h) evaluating the value expression corresponding to the path associated with the requested node;

(i) displaying data associated with the requested node if the value expression grants access to the user; and

(j) hiding data associated with the requested node if the value expression denies access to the user.

6. The method of claim 5, wherein the evaluating step (h) is performed during a run time.

7. The method of claim 1, wherein generating step (c) further comprises:

(c1) normalizing each of the access control rules into a format comprising a head, a path and a condition, wherein the condition indicates who is granted or denied access to the path and under what circumstances;

(c2) propagating each of the plurality of access control rules through each path such that access to each path is defined by at least one access control rule; and

(c3) transforming each of the at least one access control rules affecting each path into a statement indicating who is granted and denied access to the path.

8. The method of claim 3, further comprising:

(e) replacing the value expression for a path associated with a node with a reference notation if the value expression is identical to that for a path associated with the node's parent, thereby eliminating repeated value expressions in the table.

9. The method of claim 1, wherein the providing step (a) comprises:

(a1) writing the plurality of access control rules; and

(a2) validating the plurality of access control rules such that the resulting rules are syntactically and logically valid.

10. The method of claim 1, wherein the structured document is written in Extensible Markup Language.

11. A computer readable medium containing programming instructions for providing path-level access control to a structured document in a collection stored in a database, wherein the structured document comprises a plurality of nodes, instructions for:

a) providing an access control policy for the collection, wherein the access control policy comprises a plurality of access control rules;

b) generating a path for each node of the plurality of nodes in the document; and

c) generating for each path associated with a node a corresponding value expression based on at least one access control rule of the plurality of access control rules,

wherein the corresponding value expression is utilized during access control evaluation to determine whether a user is allowed to access a node in the structured document.

12. The computer readable medium of claim 11, wherein the value expression is an executable statement indicating who is granted or denied access to the corresponding path associated with the node.

13. The computer readable medium of claim 11 further comprising:

(d) storing each path and the corresponding value expression in a table.

14. The computer readable medium of claim 13 further comprising:

(e) compiling each value expression prior to storing instruction (d).

15. The computer readable medium of claim 14 further comprising:

(f) receiving a query from a user, wherein the query requests access to a node in the document;

(g) executing the query;

(h) evaluating the value expression corresponding to the path associated with the requested node;

(i) displaying data associated with the requested node if the value expression grants access to the user; and

(j) hiding data associated with the requested node if the value expression denies access to the user.

16. The computer readable medium of claim 15, wherein the evaluating instruction (h) is performed during a run time.

17. The computer readable medium of claim 1, wherein generating instruction (c) further comprises:

(c1) normalizing each of the access control rules into a format comprising a head, a path and a condition, wherein the condition indicates who is granted or denied access to the path;

(c2) propagating each of the plurality of access control rules through each path such that access to each path is defined by at least one access control rule; and

(c3) transforming each of the at least one access control rules associated with each path into a statement indicating who is granted and denied access to the path.

18. The computer readable medium of claim 13, further comprising:

(e) replacing the value expression for a path associated with a node with a reference notation if the value expression is identical to that for a path associated with the node's parent, thereby eliminating repeated value expressions in the table.

19. The computer readable medium of claim 11, wherein the providing instruction (a) comprises:

(a1) writing the plurality of access control rules; and

(a2) validating the plurality of access control rules such that the resulting rules are syntactically and logically valid.

20. The computer readable medium of claim 11, wherein the structured document is written in Extensible Markup Language.

21. A system for providing path-level access control to a structured document in a collection stored in a database, wherein the structured document comprises a plurality of nodes, comprising:

a database management system in a computer system;

an access control policy for the collection, wherein the access control policy comprises a plurality of access control rules; and

an Access Control mechanism in the database management system for generating a path for each node of the plurality of nodes in the document, and for generating for each path associated with a node a corresponding value expression based on at least one access control rule of the plurality of access control rules,

wherein the database management system utilizes the corresponding value expression during access control

evaluation to determine whether a user is allowed to access a node in the structured document.

22. The system of claim 21, wherein the value expression is an executable statement indicating who is granted or denied access to the corresponding path associated with the node.

23. The system of claim 21 wherein the Access Control mechanism is configured to store each path and the corresponding value expression in a table.

24. The system of claim 23 further comprising a compiler for compiling each value expression prior to storing in the table.

25. The system of claim 24 wherein the database management system is configured to receive a query from a user, wherein the query requests access to a node in the document, to execute the query, to evaluate the value expression corresponding to the path associated with the requested node, to display data associated with the requested node if the value expression grants access to the user, and to hide data associated with the requested node if the value expression denies access to the user.

26. The system of claim 25, wherein access control evaluation is performed during a run time.

27. The system of claim 21, wherein the access control mechanism comprises:

a translator for normalizing each of the access control rules into a format comprising a head, a path and a condition, wherein the condition indicates who is granted or denied access to the path, and for propagating each of the plurality of access control rules through each path such that access to each path is defined by at least one access control rule; and

a value expression generator for transforming each of the at least one access control rules associated with each path into a statement indicating who is granted and denied access to the path.

28. The system of claim 21, wherein the access control rules are syntactically and logically valid.

29. The system of claim 21, wherein the structured document is written in Extensible Markup Language.

30. A method for providing path-level access control to a structured document in a collection stored in a database, wherein the structured document comprises a plurality of nodes, comprising the steps of:

a) providing an access control policy for the collection, wherein the access control policy comprises a plurality of access control rules;

b) generating a path for each node of the plurality of nodes in the document;

c) generating for each path associated with a node a corresponding value expression based on at least one access control rule of the plurality of access control rules, wherein the value expression is an executable statement indicating who is granted or denied access to the corresponding path associated with the node; and

(d) storing each path and the corresponding value expression in a table;

wherein the corresponding value expression is utilized during access control evaluation to determine whether a user is allowed to access a node in the structured document.

31. The method of claim 30 further comprising:

(e) receiving a query from a user, wherein the query requests access to a node in the document;

(f) executing the query;

(g) evaluating the value expression corresponding to the path associated with the requested node during a run time;

(h) displaying data associated with the requested node if the value expression grants access to the user; and

(i) hiding data associated with the requested node if the value expression denies access to the user.

32. The method of claim 30, wherein generating step (c) further comprises:

(c1) normalizing each of the access control rules into a format comprising a head, a path and a condition, wherein the condition indicates who is granted or denied access to the path and under what circumstances;

(c2) propagating each of the plurality of access control rules through each path such that access to each path is defined by at least one access control rule; and

(c3) transforming each of the at least one access control rules affecting each path into a statement indicating who is granted and denied access to the path.

33. A computer readable medium containing programming instructions for providing path-level access control to a structured document in a collection stored in a database, wherein the structured document comprises a plurality of nodes, the programming instructions for:

a) providing an access control policy for the collection, wherein the access control policy comprises a plurality of access control rules;

b) generating a path for each node of the plurality of nodes in the document;

c) generating for each path associated with a node a corresponding value expression based on at least one access control rule of the plurality of access control rules, wherein the value expression is an executable statement indicating who is granted or denied access to the corresponding path associated with the node; and

(d) storing each path and the corresponding value expression in a table;

wherein the corresponding value expression is utilized during access control evaluation to determine whether a user is allowed to access a node in the structured document.

34. The computer readable medium of claim 33 further comprising:

(e) receiving a query from a user, wherein the query requests access to a node in the document;

(f) executing the query;

(g) evaluating the value expression corresponding to the path associated with the requested node during a run time;

(h) displaying data associated with the requested node if the value expression grants access to the user; and

(i) hiding data associated with the requested node if the value expression denies access to the user.

35. The computer readable medium of claim 33, wherein generating instruction (c) further comprises:

(c1) normalizing each of the access control rules into a format comprising a head, a path and a condition, wherein the condition indicates who is granted or denied access to the path and under what circumstances;

(c2) propagating each of the plurality of access control rules through each path such that access to each path is defined by at least one access control rule; and

(c3) transforming each of the at least one access control rules affecting each path into a statement indicating who is granted and denied access to the path.

36. A method for providing path-level access control to a structured document in a collection stored in a database, wherein the structured document comprises a plurality of nodes, comprising the steps of:

a) providing an access control policy for the collection, wherein the access control policy comprises a plurality of access control rules;

b) generating a path for each node of the plurality of nodes in the document;

c) generating for each path associated with a node a corresponding value expression based on at least one access control rule of the plurality of access control rules, wherein the generating step comprising:

(c1) normalizing each of the access control rules into a format comprising a head, a path and a condition, wherein the condition indicates who is granted or denied access to the path and under what circumstances;

(c2) propagating each of the plurality of access control rules through each path such that access to each path is defined by at least one access control rule; and

(c3) transforming each of the at least one access control rules affecting each path into a statement indicating who is granted and denied access to the path; and

(d) storing each path and the corresponding value expression in a table;

wherein the corresponding value expression is utilized during access control evaluation to determine whether a user is allowed to access a node in the structured document.

37. A computer readable medium containing programming instructions for providing path-level access control to a structured document in a collection stored in a database, wherein the structured document comprises a plurality of nodes, the programming instructions for:

a) providing an access control policy for the collection, wherein the access control policy comprises a plurality of access control rules;

b) generating a path for each node of the plurality of nodes in the document;

c) generating for each path associated with a node a corresponding value expression based on at least one access control rule of the plurality of access control rules, wherein the generating step comprising:

(c1) normalizing each of the access control rules into a format comprising a head, a path and a condition, wherein the condition indicates who is granted or denied access to the path and under what circumstances;

(c2) propagating each of the plurality of access control rules through each path such that access to each path is defined by at least one access control rule; and

(c3) transforming each of the at least one access control rules affecting each path into a statement indicating who is granted and denied access to the path; and

(d) storing each path and the corresponding value expression in a table;

wherein the corresponding value expression is utilized during access control evaluation to determine whether a user is allowed to access a node in the structured document.

* * * * *