US009063982B2

(12) **United States Patent**
Bestgen et al.

(10) **Patent No.: US 9,063,982 B2**
(45) **Date of Patent: *Jun. 23, 2015**

(54) **DYNAMICALLY ASSOCIATING DIFFERENT QUERY EXECUTION STRATEGIES WITH SELECTIVE PORTIONS OF A DATABASE TABLE**

(71) Applicant: **International Business Machines Corporation**, Armonk, NY (US)

(72) Inventors: **Robert Joseph Bestgen**, Dodge Center, MN (US); **Shantan Kethireddy**, Chicago, IL (US); **Jeffrey Wayne Tenner**, Rochester, MN (US)

(73) Assignee: **International Business Machines Corporation**, Armonk, NY (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **13/748,670**

(22) Filed: **Jan. 24, 2013**

(65) **Prior Publication Data**

US 2013/0132405 A1 May 23, 2013

Related U.S. Application Data

(63) Continuation of application No. 11/181,713, filed on Jul. 14, 2005, now Pat. No. 8,386,463.

(51) **Int. Cl.**
G06F 11/30 (2006.01)
G06F 17/30 (2006.01)

(52) **U.S. Cl.**
CPC ***G06F 17/3053*** (2013.01); ***G06F 17/30545*** (2013.01)

(58) **Field of Classification Search**
USPC 707/713, 719
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,404,510	A	4/1995	Smith et al.
5,590,319	A	12/1996	Cohen et al.
5,668,987	A	9/1997	Schneider
5,819,255	A	10/1998	Celis et al.
5,822,747	A	10/1998	Graefe et al.
5,924,094	A	7/1999	Sutter

(Continued)

OTHER PUBLICATIONS

D. Chatziantoniou et al., "Groupwise Processing of Relational Queries", Proceedings of the 23rd VLDB Conference (1997).

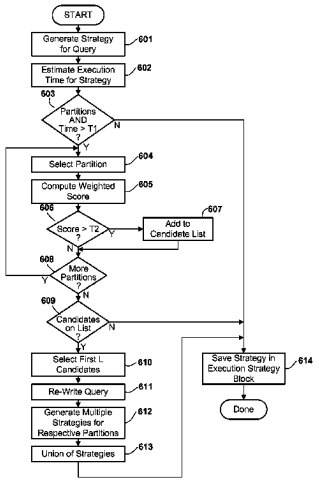
(Continued)

Primary Examiner — Sherief Badawi
Assistant Examiner — Sabana S Rahman
(74) *Attorney, Agent, or Firm* — Roy W. Truelson

(57) **ABSTRACT**

A query facility for database queries dynamically determines whether selective portions of a database table are likely to benefit from separate query execution strategies, and constructs an appropriate separate execution strategies accordingly. Preferably, the database contains at least one relatively large table comprising multiple partitions, each sharing the definitional structure of the table and containing a different respective discrete subset of the table records. The query facility compares metadata for different partitions to determine whether sufficiently large differences exist among the partitions, and in appropriate cases selects one or more partitions for separate execution strategies. Preferably, partitions are ranked for separate evaluation using a weighting formula which takes into account: (a) the number of indexes for the partition, (b) recency of change activity, and (c) the size of the partition.

17 Claims, 7 Drawing Sheets



(56) **References Cited**

U.S. PATENT DOCUMENTS

5,974,457	A	10/1999	Waclawsky et al.	
6,021,405	A	2/2000	Celis et al.	
6,026,391	A	2/2000	Osborn et al.	
6,032,143	A	2/2000	Leung et al.	
6,092,062	A	7/2000	Lohman et al.	
6,112,198	A	8/2000	Lohman et al.	
6,223,171	B1	4/2001	Chaudhuri et al.	
6,275,818	B1	8/2001	Subramanian et al.	
6,339,769	B1	1/2002	Cochrane et al.	
6,345,267	B1 *	2/2002	Lohman et al.	1/1
6,470,335	B1	10/2002	Marusak	
6,564,212	B2	5/2003	Koskas	
6,567,802	B1	5/2003	Popa et al.	
6,581,055	B1	6/2003	Ziauddin et al.	
6,609,123	B1	8/2003	Cazemier et al.	
6,618,719	B1	9/2003	Andrei	
6,643,640	B1	11/2003	Getchius et al.	
6,691,101	B2	2/2004	MacNicol et al.	
6,754,652	B2	6/2004	Bestgen et al.	
6,763,359	B2	7/2004	Lohman et al.	
6,785,673	B1	8/2004	Fernandez et al.	
6,789,071	B1	9/2004	Kapoor et al.	
6,816,874	B1	11/2004	Cotner et al.	
6,931,401	B2	8/2005	Gibson et al.	
6,957,225	B1	10/2005	Zait et al.	
7,020,661	B1	3/2006	Cruanes et al.	
7,076,508	B2	7/2006	Bourbonnais et al.	
7,111,020	B1 *	9/2006	Gupta et al.	1/1
7,130,838	B2	10/2006	Barsness et al.	
7,139,749	B2	11/2006	Bossman et al.	
7,149,716	B2	12/2006	Gatto	
7,171,399	B2	1/2007	Kapoor et al.	
7,177,855	B2	2/2007	Witkowski et al.	
7,181,450	B2	2/2007	Malloy et al.	
7,299,239	B1	11/2007	Basu et al.	
7,366,716	B2	4/2008	Agrawal et al.	
7,395,537	B1	7/2008	Brown et al.	
7,734,615	B2	6/2010	Anderson et al.	
8,386,463	B2	2/2013	Bestgen et al.	
2002/0035559	A1	3/2002	Crowe et al.	
2002/0049687	A1	4/2002	Helsper et al.	
2002/0103793	A1	8/2002	Keller et al.	
2003/0084030	A1	5/2003	Day et al.	
2004/0122845	A1 *	6/2004	Lohman et al.	707/102
2004/0249810	A1	12/2004	Das et al.	
2004/0260684	A1	12/2004	Agrawal et al.	
2005/0038784	A1	2/2005	Zait et al.	
2005/0097099	A1 *	5/2005	Kapoor et al.	707/3
2005/0160102	A1	7/2005	Abdo et al.	
2005/0192937	A1	9/2005	Barsness et al.	
2005/0210010	A1 *	9/2005	Larson et al.	707/3
2006/0080285	A1	4/2006	Chowdhuri	
2006/0101001	A1	5/2006	Lindsay et al.	
2006/0155679	A1	7/2006	Kothuri et al.	
2006/0173852	A1	8/2006	Bestgen et al.	
2006/0212429	A1	9/2006	Bruno et al.	
2006/0218123	A1 *	9/2006	Chowdhuri et al.	707/2
2007/0016432	A1	1/2007	Piggott et al.	
2007/0027860	A1	2/2007	Bestgen et al.	
2007/0061487	A1	3/2007	Moore et al.	
2007/0124276	A1	5/2007	Weissman et al.	
2007/0226176	A1	9/2007	Bestgen et al.	
2008/0033914	A1	2/2008	Chemiack et al.	

OTHER PUBLICATIONS

A. Shatdal et al., "Adaptive Parallel Aggregation Algorithms", Proceedings of the 1995 ACM-SIGMOD Conference (May 1995).

"Using the Design Advisor to migrate from a single-partition to a multiple-partition database," http://publib.boulder.ibm.com/infocenter/db2help/topic/com.ibm.db2.doc/admin/t0011 . . . (publication date unknown).

Stocker, et al., "Integrating Semi-Join-Reducers into State-of-the-Art Query Processors", IEEE Computer Society, 2001.

R. Niemiec, "Oracle9i Introduces List Partitioning", (Oracle Magazine Jul./Aug. 2002).

"Getting to Know Oracle 8i", Chapter 2: Oracle8i New Features (Oracle Corp. 1999).

"Event 10128: debug partition elimination", published at www.oracleadvice.com/Tips/partprune.htm (publication date unknown).

* cited by examiner

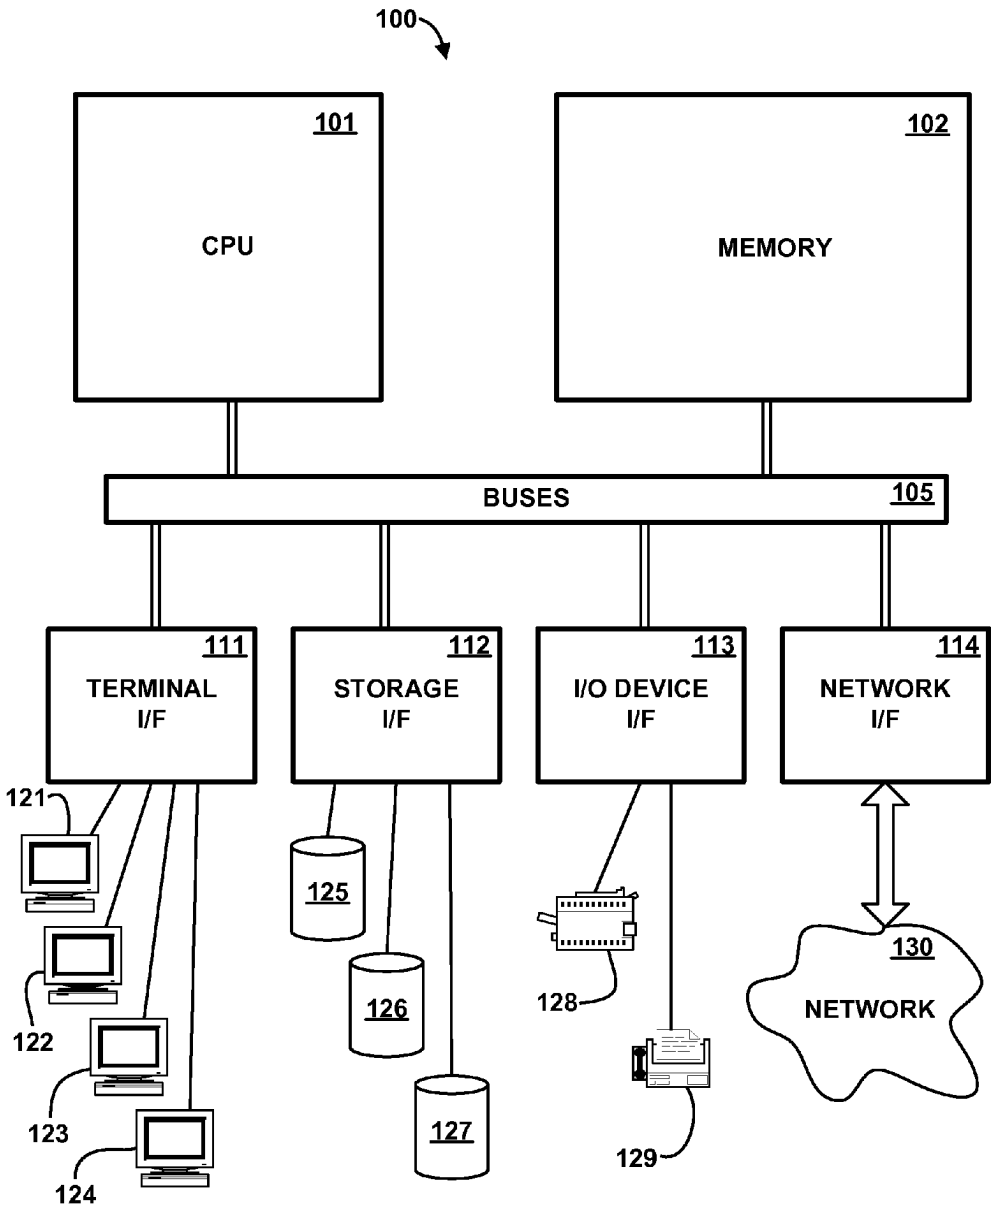

100
101
CPU
102
MEMORY
BUSES
105
111
TERMINAL I/F
112
STORAGE I/F
113
I/O DEVICE I/F
114
NETWORK I/F
121
122
123
124
125
126
127
128
129
130
NETWORK

FIG. 1

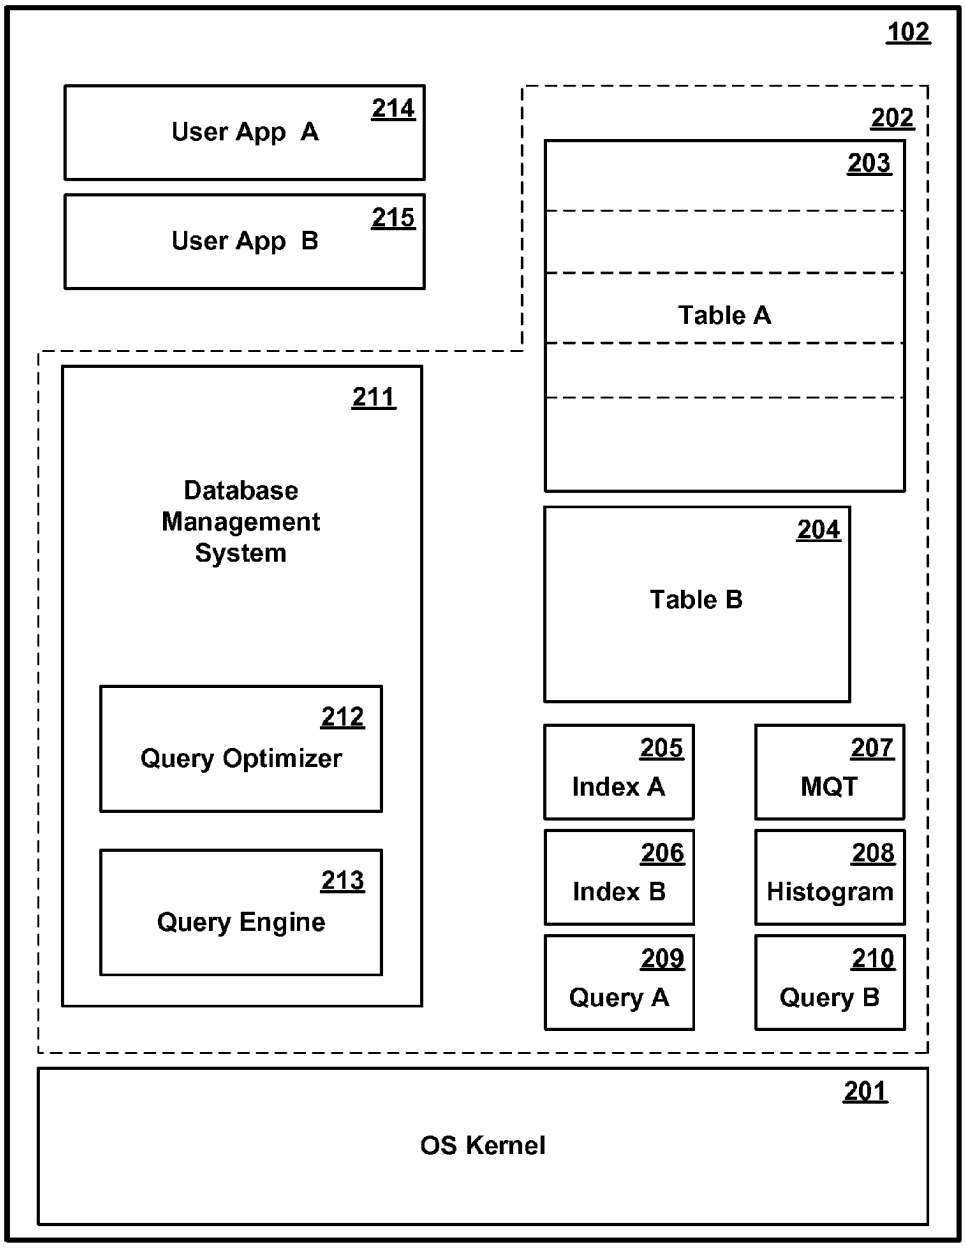

102
214
User App A
215
User App B
202
203
Table A
211
Database Management System
204
Table B
212
Query Optimizer
213
Query Engine
205
Index A
207
MQT
206
Index B
208
Histogram
209
Query A
210
Query B
201
OS Kernel

FIG. 2

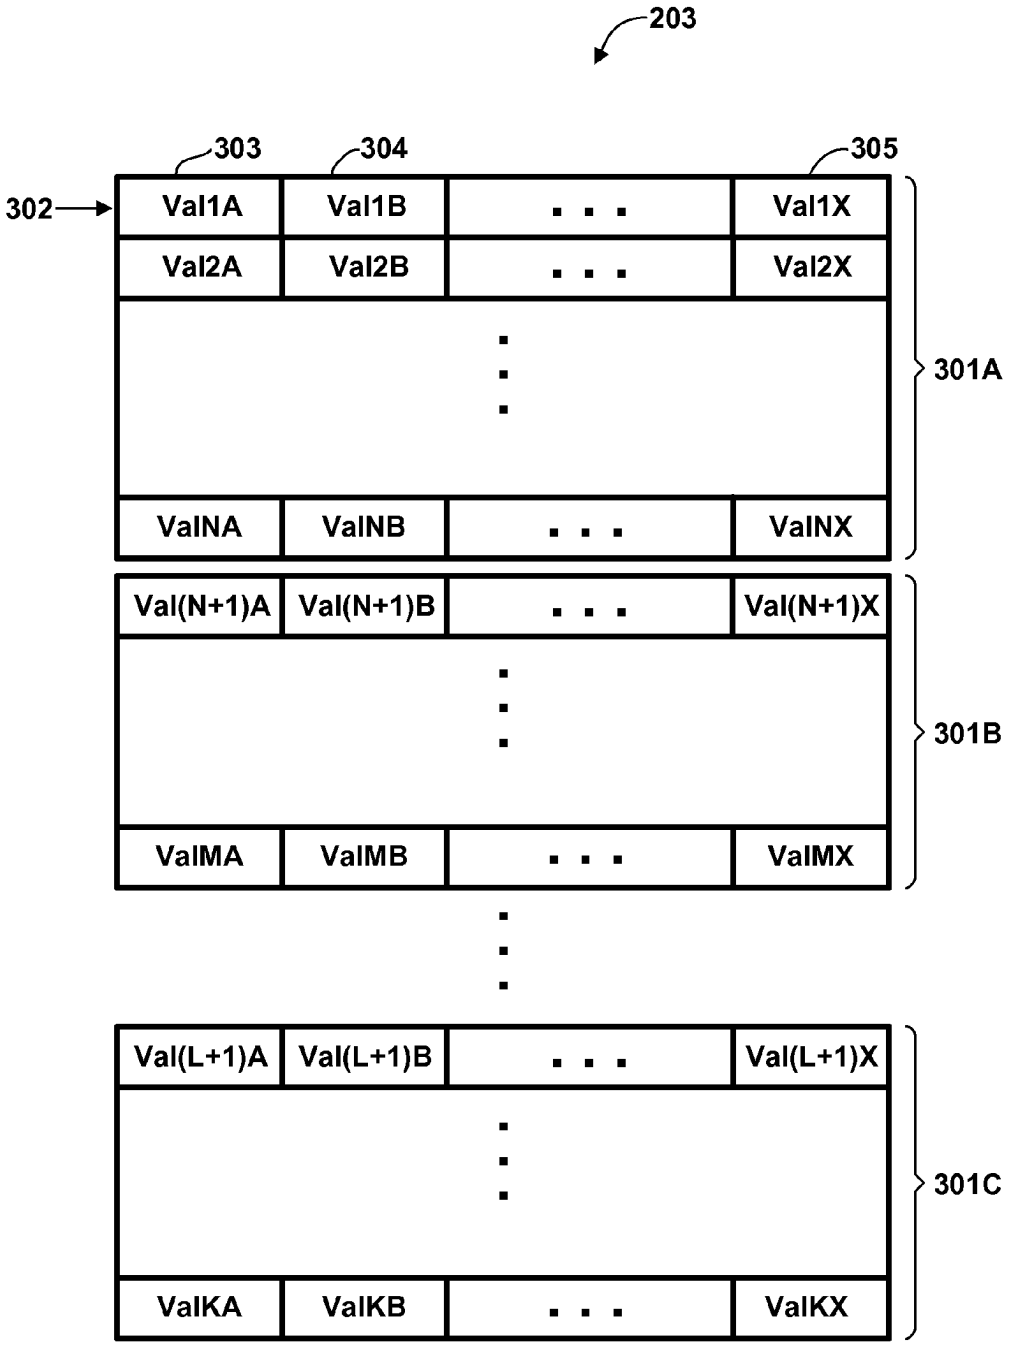

203
303
304
305
302
Val1A
Val1B
. . .
Val1X
Val2A
Val2B
. . .
Val2X
ValNA
ValNB
. . .
ValNX
301A
Val(N+1)A
Val(N+1)B
. . .
Val(N+1)X
ValMA
ValMB
. . .
ValMX
301B
Val(L+1)A
Val(L+1)B
. . .
Val(L+1)X
ValKA
ValKB
. . .
ValKX
301C

FIG. 3

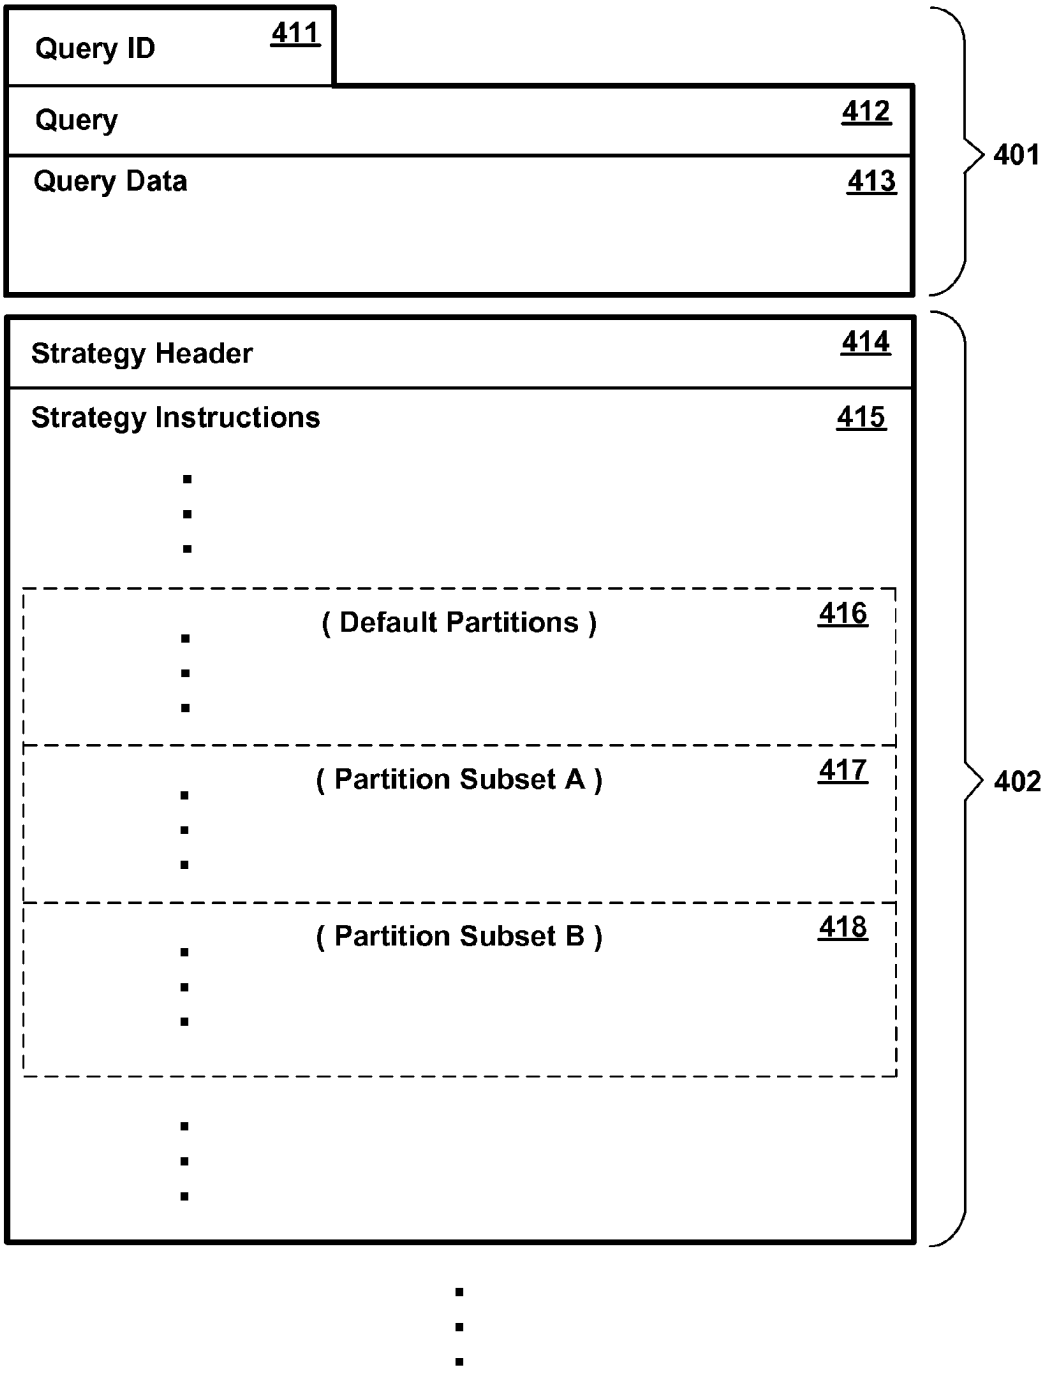

Query ID
411
Query
412
Query Data
413
401
Strategy Header
414
Strategy Instructions
415
(Default Partitions)
416
(Partition Subset A)
417
(Partition Subset B)
418
402

FIG. 4

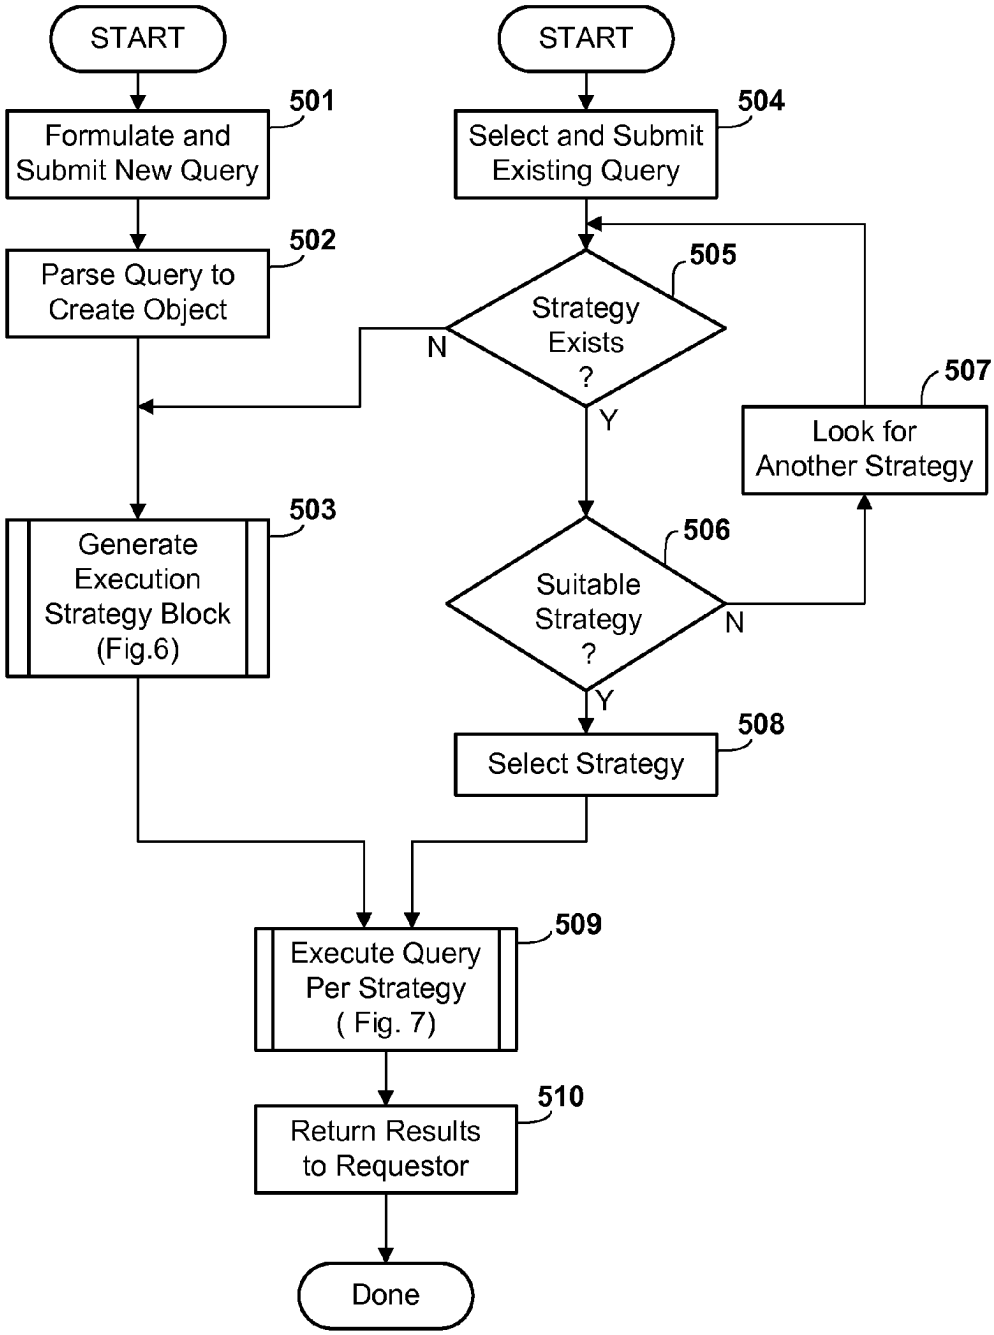

START
Formulate and Submit New Query
501
Parse Query to Create Object
502
Generate Execution Strategy Block (Fig.6)
503
START
Select and Submit Existing Query
504
Strategy Exists ?
505
N
Y
Look for Another Strategy
507
Suitable Strategy ?
506
N
Y
Select Strategy
508
Execute Query Per Strategy (Fig. 7)
509
Return Results to Requestor
510
Done

FIG. 5

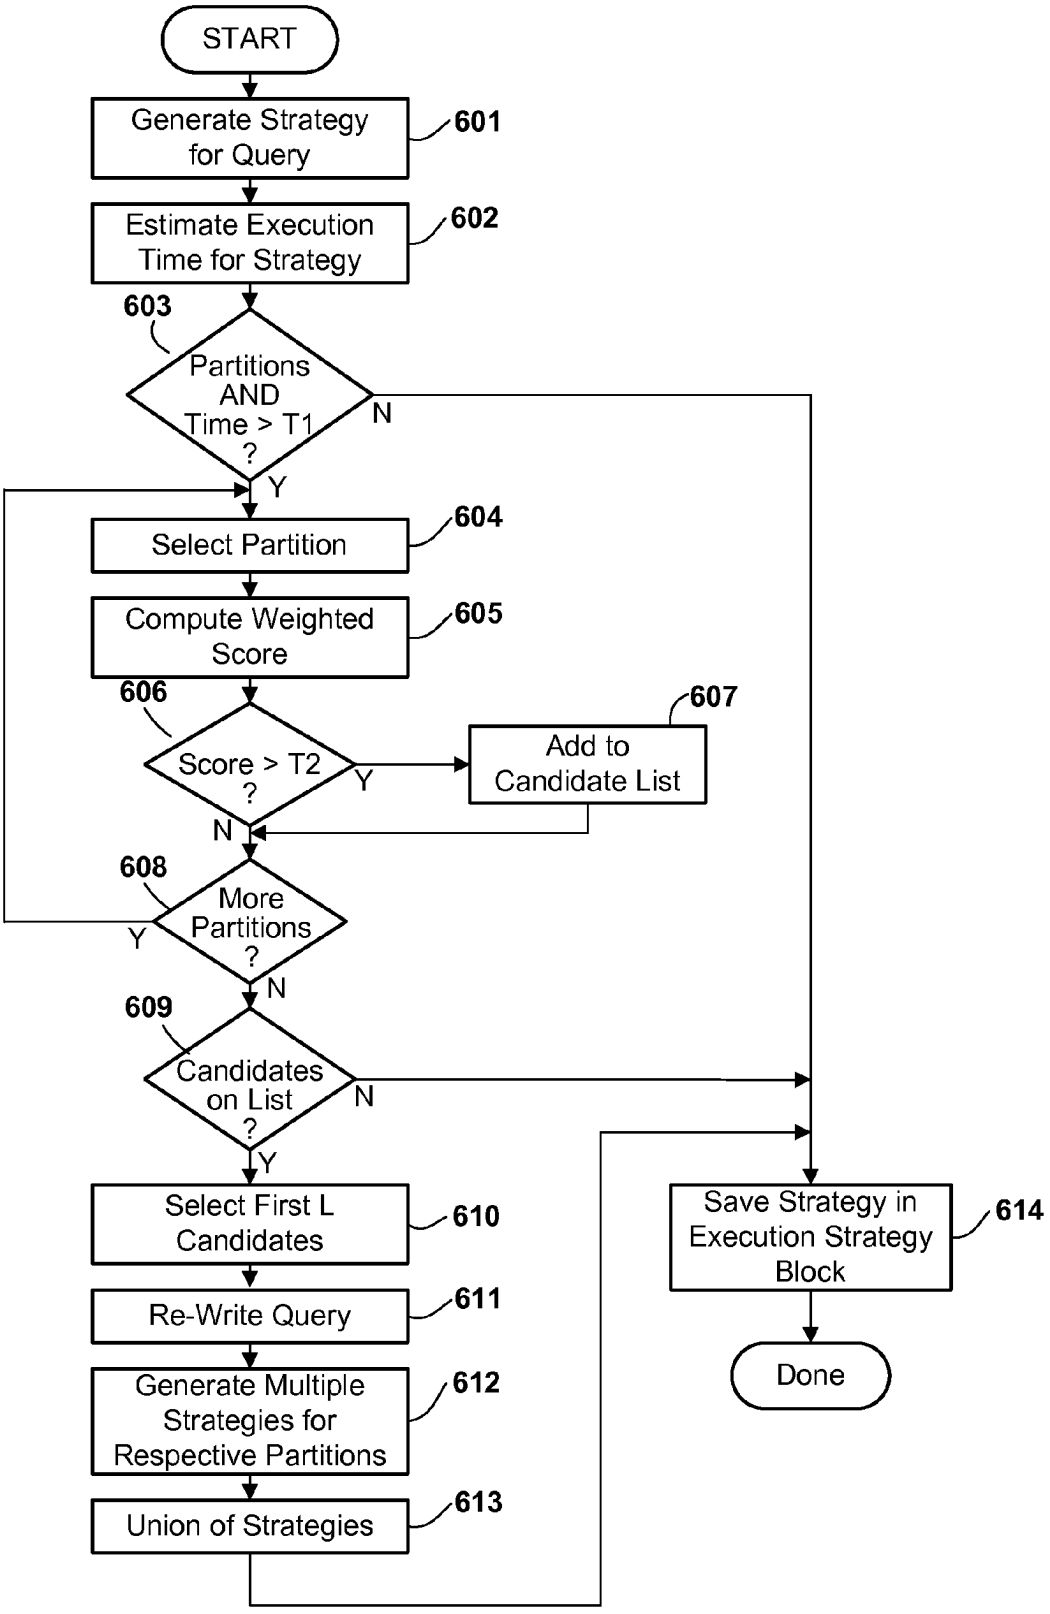

START
Generate Strategy for Query
601
Estimate Execution Time for Strategy
602
603
Partitions AND Time > T1 ?
N
Y
Select Partition
604
Compute Weighted Score
605
606
Score > T2 ?
Y
607
Add to Candidate List
N
608
More Partitions ?
Y
N
609
Candidates on List ?
N
Y
Select First L Candidates
610
Re-Write Query
611
Generate Multiple Strategies for Respective Partitions
612
Union of Strategies
613
Save Strategy in Execution Strategy Block
614
Done

FIG. 6

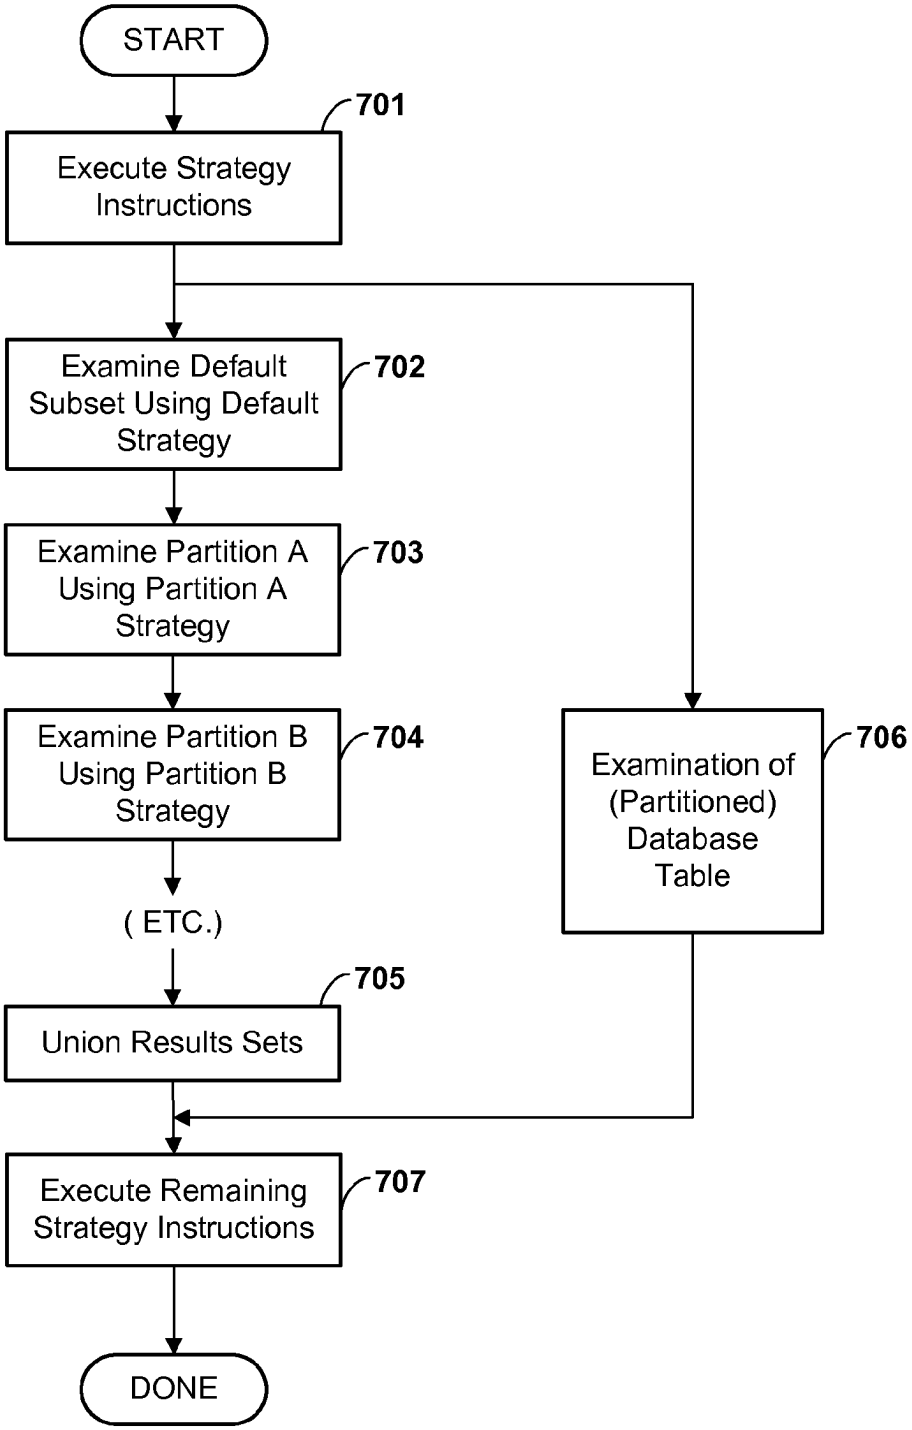

START
701
Execute Strategy Instructions
Examine Default Subset Using Default Strategy
702
Examine Partition A Using Partition A Strategy
703
Examine Partition B Using Partition B Strategy
704
(ETC.)
Examination of (Partitioned) Database Table
706
705
Union Results Sets
Execute Remaining Strategy Instructions
707
DONE

FIG. 7

DYNAMICALLY ASSOCIATING DIFFERENT QUERY EXECUTION STRATEGIES WITH SELECTIVE PORTIONS OF A DATABASE TABLE

CROSS REFERENCE TO RELATED APPLICATION

This is a continuation of U.S. patent application Ser. No. 11/181,713, filed Jul. 14, 2005, entitled "Method and Apparatus for Dynamically Associating Different Query Execution Strategies with Selective Portions of a Database Table", which is herein incorporated by reference. This application claims priority under 35 U.S.C. §120 of U.S. patent application Ser. No. 11/181,713, filed Jul. 14, 2005.

FIELD OF THE INVENTION

The present invention relates generally to digital data processing, and more particularly to the generation and execution of database queries in a digital computer system.

BACKGROUND OF THE INVENTION

In the latter half of the twentieth century, there began a phenomenon known as the information revolution. While the information revolution is a historical development broader in scope than any one event or machine, no single device has come to represent the information revolution more than the digital electronic computer. The development of computer systems has surely been a revolution. Each year, computer systems grow faster, store more data, and provide more applications to their users.

A modern computer system typically comprises hardware in the form of one or more central processing units (CPU) for processing instructions, memory for storing instructions and other data, and other supporting hardware necessary to transfer information, communicate with the external world, and so forth. From the standpoint of the computer's hardware, most systems operate in fundamentally the same manner. Processors are capable of performing a limited set of very simple operations, such as arithmetic, logical comparisons, and movement of data from one location to another. But each operation is performed very quickly. Programs which direct a computer to perform massive numbers of these simple operations give the illusion that the computer is doing something sophisticated. What is perceived by the user as a new or improved capability of a computer system is made possible by performing essentially the same set of very simple operations, but doing it much faster. Therefore continuing improvements to computer systems require that these systems be made ever faster.

The overall speed at which a computer system performs day-to-day tasks (also called "throughput") can be increased by making various improvements to the computer's hardware design, which in one way or another increase the average number of simple operations performed per unit of time. The overall speed of the system can also be increased by making algorithmic improvements to the system design, and particularly, to the design of software executing on the system. Unlike most hardware improvements, many algorithmic improvements to software increase the throughput not by increasing the average number of operations executed per unit time, but by reducing the total number of operations which must be executed to perform a given task.

Complex systems may be used to support a variety of applications, but one common use is the maintenance of large databases, from which information may be obtained. Large databases usually support some form of database query for obtaining information which is extracted from selected database fields and records. Such queries can consume significant system resources, particularly processor resources, and the speed at which queries are performed can have a substantial influence on the overall system throughput.

Conceptually, a database may be viewed as one or more tables of information, each table having a large number of entries (analogous to rows of a table), each entry having multiple respective data fields (analogous to columns of the table). The function of a database query is to find all rows, for which the data in the columns of the row matches some set of parameters defined by the query. A query may be as simple as matching a single column field to a specified value, but is often far more complex, involving multiple field values and logical conditions. A query may also involve multiple tables (referred to as a "join" query), in which the query finds all sets of N rows, one row from each respective one of N tables joined by the query, where the data from the columns of the N rows matches some set of query parameters.

Execution of a query involves retrieving and examining records in the database according to some search strategy. For any given logical query, not all search strategies are equal. Various factors may affect the choice of optimum search strategy. One of the factors affecting choice of optimum search strategy is the sequential order in which multiple conditions joined by a logical operator, such as AND or OR, are evaluated. The sequential order of evaluation is significant because the first evaluated condition is evaluated with respect to all the entries in a database table, but a later evaluated condition need only be evaluated with respect to some subset of records which were not eliminated from the determination earlier. Therefore, as a general rule, it is desirable to evaluate those conditions which are most selective (i.e., eliminate the largest number of records from further consideration) first, and to evaluate conditions which are less selective later.

Other factors can also affect the choice of optimum execution strategy. For example, certain auxiliary database structures (sometimes called metadata) may, if appropriately used, provide shortcuts for evaluating a query. One well known type of auxiliary database structure is an index. An index is conceptually a sorting of entries in a database table according to the value of one or more corresponding fields (columns). For example, if the database table contains entries about people, one of the fields may contain a birthdate, and a corresponding index contains a sorting of the records by birthdate. If a query requests the records of all persons born before a particular date, the sorted index is used to find the responsive entries, without the need to examine each and every entry to determine whether there is a match. A well-designed database typically contains a respective index for each field having an ordered value which is likely to be used in queries. Other forms of auxiliary database record may also be used.

Some databases employ partitioned tables, which can be used to advantage in evaluating certain queries. Partitioning means that a larger conceptual database table is divided into multiple discrete portions ("partitions"), each entry in the table being allocated to a respective one of the partitions. A partition is usually a discrete data entity, such as a file, but contains the same definitional structure (i.e., number of fields in each entry, type of data in each respective field, etc.) as all other partitions of the same table. Partitioning may be performed for a variety of reasons, and is usually performed on very large tables as a means of breaking the data into subsets of some conveniently workable size. In many cases, records are allocated to partitions based on some key value. If the

logical conditions of a query are such that it can be known that, for a given large table which is partitioned, all entries satisfying the query will be contained in some subset of the partitions, then it is not necessary to examine entries in the other partitions not in the subset, resulting in a considerable savings at query execution time.

To support database queries, large databases typically include a query engine which executes the queries according to some automatically selected search strategy, using the known characteristics of the database and other factors. Some large database applications further have query optimizers which construct search strategies, and save the query and its corresponding search strategy for reuse. These strategies may include, among other things, the order in which conditions are evaluated and whether an auxiliary data structure such as an index will be used. A query optimizer or similar function may generate a search strategy for a query based on certain assumptions about the use of auxiliary data structures or the number of entries eliminated from consideration by certain logical conditions. Where these assumptions are erroneous, the resultant query execution strategy may be significantly less than optimal.

Where a database table involved in a query is divided into multiple partitions, the query engine will separately examine the records in each applicable partition for satisfaction of the query conditions. As explained above, in some cases it may be inferred from the query conditions that no records within a particular partition or subset of partitions will satisfy the query, and in this case the query optimizer may construct the query to by-pass examination of these partitions. However, among the examined partitions (i.e., those which can not be eliminated from examination beforehand based on the known query and partition parameters), there may well be differences in data distribution, auxiliary structures or other characteristics which would affect the choice of optimal query execution strategy.

If a common query execution strategy is constructed for all partitions which can not be eliminated from consideration, this strategy will typically be based on average or common characteristics of the partitions. In this case, there is a risk that at least some partitions will have characteristics at variance with the average, and that the query execution strategy will be sub-optimal for these partitions.

In order to deal with different data characteristics of different partitions, it is known to separately analyze and construct an independent query execution strategy for each partition. However, construction of an appropriate query execution strategy involves considerable analytical overhead. The overhead of constructing a separate and independent query execution strategy for each respective partition can well outweigh the benefits of improved execution efficiency from tailoring the execution strategy to the partition. As the number of partitions of a database table grows, this overhead becomes increasingly burdensome.

A need exists for improved techniques for constructing query execution strategies against large, partitioned database tables. In particular, a need exists, not necessarily recognized, for an improved database query engine or optimizer which can automatically make intelligent choices in determining when to construct separate query execution strategies for different subsets of records a database.

SUMMARY OF THE INVENTION

A query engine (or optimizer) which supports database queries dynamically determines whether selective portions of a database table are likely to benefit from separate query execution strategies, and with respect to any selective portion determined likely to benefit from such a separate query execution strategy, constructs an appropriate strategy using characteristics of the selection portion.

In the preferred embodiment, a database contains at least one relatively large table which is partitioned into multiple partitions, each sharing the definitional structure of the table and containing a different respective discrete subset of the table records. If a query is generated against data in the table, a query engine or optimizer compares metadata for different partitions to determine whether sufficiently large differences exist among the partitions, and in appropriate cases selects one or more partitions for separate evaluation. A separate and independent query execution strategy is then constructed for each of the selected partitions, with a general strategy being constructed for the remaining partitions.

In the preferred embodiment, partitions are ranked for separate evaluation using a weighting formula which takes into account: (a) the number of indexes for the partition, (b) recency of change activity, and (c) the size of the partition, it being understood that numerous other factors could additionally or alternatively be taken into account. If the weighted score of one or more partitions exceeds a pre-determined threshold, then those partitions having the highest score and exceeding the threshold are selected, up to a pre-determined selection limit. It is possible that no partitions will be selected, or that a number of partitions fewer than the selection limit will be selected. A separate query strategy is then constructed for each selected partition, using the data characteristics of the partition.

A technique for selectively identifying partitions for independent query optimization as described herein can be implemented using very little overhead. By intelligently selecting only some partitions for separate query optimization, the overhead of optimizing every partition independently is avoided, and separate optimization is performed in those fewer but significant cases where it is likely to make a real difference in query execution performance. In those selective partitions, a separate query execution strategy, independently optimized using the characteristics of the partition, is likely to provide significant query execution performance improvements.

The details of the present invention, both as to its structure and operation, can best be understood in reference to the accompanying drawings, in which like reference numerals refer to like parts, and in which:

BRIEF DESCRIPTION OF THE DRAWING

FIG. **1** is a high-level block diagram of the major hardware components of a computer system for executing database queries and dynamically associating different query execution strategies with different database portions, according to the preferred embodiment of the present invention.

FIG. **2** is a conceptual illustration of the major software components of a computer system for executing database queries and dynamically associating different query execution strategies with different database portions, according to the preferred embodiment.

FIG. **3** is a conceptual representation of the structure of a partitioned database table, according to the preferred embodiment.

FIG. **4** is a conceptual representation of a persistent query object, according to the preferred embodiment.

FIG. **5** is a flow diagram illustrating at a high level the process of executing a database query, according to the preferred embodiment.

FIG. **6** shows in greater detail the process of generating a query execution strategy for a database table having multiple partitions, according to the preferred embodiment.

FIG. **7** shows in greater detail the process of executing a query using an execution strategy which is separately optimized for different partition of a database table, according to the preferred embodiment.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to the Drawing, wherein like numbers denote like parts throughout the several views, FIG. **1** is a high-level representation of the major hardware components of a computer system **100** for use in generating and executing database queries, dynamically determining whether different portions of a queried database are likely to benefit from different query execution strategies, and generating different strategies as required by the determination made, according to the preferred embodiment of the present invention. CPU **101** is at least one general-purpose programmable processor which executes instructions and processes data from main memory **102**. Main memory **102** is preferably a random access memory using any of various memory technologies, in which data is loaded from storage or otherwise for processing by CPU **101**.

One or more communications buses **105** provide a data communication path for transferring data among CPU **101**, main memory **102** and various I/O interface units **111-114**, which may also be known as I/O processors (IOPs) or I/O adapters (IOAs). The I/O interface units support communication with a variety of storage and I/O devices. For example, terminal interface unit **111** supports the attachment of one or more user terminals **121-124**. Storage interface unit **112** supports the attachment of one or more direct access storage devices (DASD) **125-127** (which are typically rotating magnetic disk drive storage devices, although they could alternatively be other devices, including arrays of disk drives configured to appear as a single large storage device to a host). I/O device interface unit **113** supports the attachment of any of various other types of I/O devices, such as printer **128** and fax machine **129**, it being understood that other or additional types of I/O devices could be used. Network interface **114** supports a connection to external network **130** for communication with one or more other digital devices. Network **130** may be any of various local or wide area networks known in the art. For example, network **130** may be an Ethernet local area network, or it may be the Internet. Additionally, network interface **114** might support connection to multiple networks.

It should be understood that FIG. **1** is intended to depict the representative major components of system **100** at a high level, that individual components may have greater complexity than represented in FIG. **1**, that components other than or in addition to those shown in FIG. **1** may be present, and that the number, type and configuration of such components may vary, and that a large computer system will typically have more components than represented in FIG. **1**. Several particular examples of such additional complexity or additional variations are disclosed herein, it being understood that these are by way of example only and are not necessarily the only such variations.

Although only a single CPU **101** is shown for illustrative purposes in FIG. **1**, computer system **100** may contain multiple CPUs, as is known in the art. Although main memory **102** is shown in FIG. **1** as a single monolithic entity, memory **102** may in fact be distributed and/or hierarchical, as is known in the art. E.g., memory may exist in multiple levels of caches, and these caches may be further divided by function, so that one cache holds instructions while another holds non-instruction data which is used by the processor or processors. Memory may further be distributed and associated with different CPUs or sets of CPUs, as is known in any of various so-called non-uniform memory access (NUMA) computer architectures. Although communications buses **105** are shown in FIG. **1** as a single entity, in fact communications among various system components is typically accomplished through a complex hierarchy of buses, interfaces, and so forth, in which higher-speed paths are used for communications between CPU **101** and memory **102**, and lower speed paths are used for communications with I/O interface units **111-114**. Buses **105** may be arranged in any of various forms, such as point-to-point links in hierarchical, star or web configurations, multiple hierarchical buses, parallel and redundant paths, etc. For example, as is known in a NUMA architecture, communications paths are arranged on a nodal basis. Buses may use, e.g., an industry standard PCI bus, or any other appropriate bus technology. While multiple I/O interface units are shown which separate buses **105** from various communications paths running to the various I/O devices, it would alternatively be possible to connect some or all of the I/O devices directly to one or more system buses.

Computer system **100** depicted in FIG. **1** has multiple attached terminals **121-124**, such as might be typical of a multi-user "mainframe" computer system. Typically, in such a case the actual number of attached devices is greater than those shown in FIG. **1**, although the present invention is not limited to systems of any particular size. User workstations or terminals which access computer system **100** might also be attached to and communicate with system **100** over network **130**. Computer system **100** may alternatively be a single-user system, typically containing only a single user display and keyboard input, or a system such as a server containing no directly attached terminals. Furthermore, while the invention herein is described for illustrative purposes as embodied in a single computer system, the present invention could alternatively be implemented using a distributed network of computer systems in communication with one another, in which different functions or steps described herein are performed on different computer systems.

While various system components have been described and shown at a high level, it should be understood that a typical computer system contains many other components not shown, which are not essential to an understanding of the present invention. In the preferred embodiment, computer system **100** is a computer system based on the IBM AS/400™ or i/Series™ architecture, it being understood that the present invention could be implemented on other computer systems.

FIG. **2** is a conceptual illustration of the major software components of system **100** in memory **102**. Operating system kernel **201** is executable code and state data providing various low-level software functions, such as device interfaces, management of memory pages, management and dispatching of multiple tasks, etc. as is well-known in the art. A structured database **202** contains data which is maintained by computer system **100** and for which the system provides access to one or more users, who may be directly attached to system **100** or may be remote clients who access system **100** through a network using a client/server access protocol.

Database **202** contains one or more tables **203**, **204** (of which two are shown in FIG. **2**), each having a plurality of entries or records, each entry containing at least one (and usually many) fields, as is well known in the art. Database tables **203**, **204** might contain almost any type of data which is provided to users by a computer system. In accordance with

the preferred embodiment, at least one database table (represented in FIG. **2** as table **203**) comprises multiple partitions, each partition containing some discrete portion of the entries in table **203**. Associated with the database tables are one or more auxiliary data structures **205-208**, also sometimes referred to as metadata. Auxiliary data structures characterize the structure of the database and data therein, and are useful in various tasks involved in database management, particularly in executing queries against the database. Examples of auxiliary data structures include database indexes **205-206**, materialized query table **207**, and histogram **208**, it being understood that other types of metadata may exist.

Database management system **211** provides basic functions for the management of database **202**. Database management system **211** may theoretically support an arbitrary number of database tables, which may or may not have related information, although only two tables are shown in FIG. **2**. Database management system **211** preferably allows users to perform basic database operations, such as defining a database, altering the definition of the database, creating, editing and removing records in the database, viewing records in the database, defining database indexes, and so forth. Among the functions supported by database management system **211** is the making of queries against data in database tables **203**, **204**. Query support functions in database management system **211** include query optimizer **212** and query engine **213**. Database management system **211** may further contain any of various more advanced database functions. Although database management system **211** is represented in FIG. **2** as an entity separate from operating system kernel **201**, it will be understood that in some computer architectures various database management functions are integrated with the operating system.

Query optimizer **212** generates query execution strategies for performing database queries. As is known in the database art, the amount of time or resource required to perform a complex query on a large database can vary greatly, depending on various factors, such as the availability of an index or other auxiliary data structure, the amount of resources required to evaluate each condition, and the expected selectivity (i.e., number of records eliminated from consideration) of the various logical conditions. Optimizer **212** determines an optimal execution strategy according to any optimizing algorithm, now known or hereafter developed, and generates an execution strategy, also known as an "access plan", according to the determination. The execution strategy is a defined series of steps for performing the query, and thus is, in effect, a computer program. The optimizer **212** which generates the execution strategy performs a function analogous to that of a compiler, although the execution strategy data is not necessarily executable-level code. It is, rather, a higher-level series of statements which are interpreted and executed by query engine **213**.

A query can be saved as a persistent storage object in memory, and can be written to disk or other storage. Once created by optimizer **212**, a query execution strategy can be saved with the query as part of the persistent storage object. For a given query, it is possible to generate and save one, or optionally multiple, optimized execution strategies. The query can be invoked, and a saved query strategy re-used (re-executed), many times.

FIG. **2** represents persistent storage objects Query A **209** and Query B **210**. Query objects are described in further detail herein, with respect to FIG. **4**. Although two query objects are represented for illustrative purposes in FIG. **2**, it will be understood that the actual number of such entities may vary, that typically a large computer system contains a much larger number of query objects, that each query object may contain or be associated with zero, one, or more than one execution strategies. Although these are referred to herein as "query objects", the use of the term "object" is not meant to imply that database management system **211** or other components are necessarily programmed using so-called object-oriented programming techniques, or that the query object necessarily has the attributes of an object in an object-oriented programming environment, although it would be possible to implement them using object-oriented programming constructs.

Although one database **202** having two database tables **203**, **204**, two indexes **205-206**, one MQT **207** and one histogram **208** are shown in FIG. **2**, the number of such entities may vary, and could be much larger. The computer system may contain multiple databases, each database may contain multiple tables, and each database may have associated with it multiple indexes, MQTs, histograms, or other auxiliary data structures not illustrated. Alternatively, some entities represented in FIG. **2** might not be present in all databases; for example, some databases might not contain materialized query tables or the like. Additionally, database **202** may be logically part of a larger distributed database which is stored on multiple computer systems. Although database management system **211** is represented in FIG. **2** as part of database **202**, the database management system, being executable code, is sometimes considered an entity separate from the "database", i.e., the data.

In addition to database management system **211**, one or more user applications **214**, **215** executing on CPU **101** may access data in database tables **203**, **204** to perform tasks on behalf of one or more users. Such user applications may include, e.g., personnel records, accounting, code development and compilation, mail, calendaring, or any of thousands of user applications. Some of these applications may access database data in a read-only manner, while others have the ability to update data. There may be many different types of read or write database access tasks, each accessing different data or requesting different operations on the data. For example, one task may access data from a specific, known record, and optionally update it, while another task may invoke a query, in which all records in the database are matched to some specified search criteria, data from the matched records being returned, and optionally updated. Furthermore, data may be read from or written to database tables **203**, **204** directly, or may require manipulation or combination with other data supplied by a user, obtained from another database, or some other source. Although two applications **214**, **215** are shown for illustrative purposes in FIG. **2**, the number of such applications may vary. Applications **214**, **215** typically utilize function calls to database manager **211** to access data in database **202**, and in particular, to execute queries to data in the database, although in some systems it may be possible to independently access data in database **202** directly from the application.

Various software entities are represented in FIG. **2** as being separate entities or contained within other entities. However, it will be understood that this representation is for illustrative purposes only, and that particular modules or data entities could be separate entities, or part of a common module or package of modules. Furthermore, although a certain number and type of software entities are shown in the conceptual representation of FIG. **2**, it will be understood that the actual number of such entities may vary, and in particular, that in a complex database server environment, the number and complexity of such entities is typically much larger. Additionally, although software components **202-215** are depicted in FIG. **2** on a single computer system **100** for completeness of the

representation, it is not necessarily true that all programs, functions and data will be present on a single computer system or will be performed on a single computer system. For example, user applications may be on a separate system from the database; a database may be distributed among multiple computer systems, so that queries against the database are transmitted to remote systems for resolution, and so forth.

While the software components of FIG. **2** are shown conceptually as residing in memory **102**, it will be understood that in general the memory of a computer system will be too small to hold all programs and data simultaneously, and that information is typically stored in data storage devices **125-127**, comprising one or more mass storage devices such as rotating magnetic disk drives, and that the information is paged into memory by the operating system as required. In particular, database tables **203**, **204** are typically much too large to be loaded into memory, and typically only a small portion of the total number of database records is loaded into memory at any one time. The full database **202** is typically recorded in disk storage **125-127**. Furthermore, it will be understood that the conceptual representation of FIG. **2** is not meant to imply any particular memory organizational model, and that system **100** might employ a single address space virtual memory, or might employ multiple virtual address spaces which overlap.

FIG. **3** is a conceptual representation of the structure of partitioned database table **203**, according to the preferred embodiment. Database table **203** contains multiple database entries (also called records, or rows) **302**, each entry containing multiple data values logically organized as multiple data fields **303-305**. Database table **203** is conceptually represented in FIG. **3** as a table or array, in which the rows represent database entries or records, and the columns represent data fields. However, as is well known in the art, the actual structure of the database in memory typically varies due to the needs of memory organization, accommodating database updates, and so forth. A database table will often occupy non-contiguous blocks of memory; database records may vary in length; some fields might be present in only a subset of the database records; and individual entries may be non-contiguous. Portions of the data may even be present on other computer systems. Various pointers, arrays, and other structures (not shown) may be required to identify the locations of different data contained in the database.

Database table **203** is partitioned into multiple partitions **301**A-**301**C (herein generically referred to as feature **301**), of which three are shown in FIG. **3**. A partition **301** contains a subset of the entries in the database table **203** of which it is a part. I.e., the partition is conceptually a table containing exactly the same data fields **303-305** as the database table **203** of which it is a part, but containing only some of the entries (rows) of the whole table. Each partition contains a discrete (i.e., non-overlapping) subset of the entries, the union of all the partitions **301** constituting the entire database table **203**. Each partition **301** is itself a separate file, object or other data structure, although it is logically part of a larger table **203**. Partitioned tables are often used because the volume of data in the whole table **203** is so large that including all of it in a single data structure violates some size constraint in the system, or simply becomes unwieldy to search or otherwise process, although a partitioned table may conceivably be used for other purposes. Although only three partitions are represented in FIG. **3** for clarity of illustration, it will be understood that the number of partitions could be (and often is) significantly larger.

Where table partitioning is used, there must be some consistent method for allocating each entry to a respective one of the partitions. This may be accomplished by using some hash function of an address or record number, which will generally allocate an approximately equal number of records to each partition. However, it is often advantageous to allocate entries to partitions according to the value of some data field controlling the partitioning, because if a query should include a condition referencing that field, it may be known in advance that all of the responsive entries will be in a particular one of the partitioned tables (or some subset of the partitioned tables), thus reducing the scope of the records which must be examined to satisfy the query. In this case, the partitioned tables will not generally be the same size, and there may be substantial size differences. This data field controlling the partitioning, also known as a "partition key", might contain an ordered value, where ranges of the ordered value correspond to respective partition tables, or might contain one of multiple discrete values, each discrete value corresponding to a respective partitioned table. For example, in a database table of transactions maintained by a bank or similar financial institution, it may be desirable to partition the table by ranges of dates, such as calendar year or month. Because many queries against the database will be limited to some particular range of dates, it is possible to immediately narrow the scope of records examined by removing from consideration any records contained in a partitioned table corresponding to a date range outside the scope of the query.

FIG. **4** is a conceptual representation of a typical persistent query object **209**, according to the preferred embodiment. A query object contains a body portion **401**, and a variable number of execution strategy blocks **402**, which could be zero, one or (optionally) multiple execution strategy blocks (of which one is represented in the example of FIG. **4**). The body portion contains a query identifier field **411**, a query logical representation **412**, and additional query data **413**. The query logical representation **412** is a representation of the query in a form understandable by the query optimizer **212** and/or query engine **213**, from which a query execution strategy can be constructed. Additional query data **413** includes various other data which might be useful to database management system **211** or other applications accessing a query. For example, additional data **413** might include a text description of the query, performance statistics for running the query, security and access control information, and so forth. Additional query data **413** is represented in FIG. **4** as a single block of data for clarity of illustration; however, such additional data will typically comprise multiple fields, some of which may be optional or of variable length, or may reference data in other data structures.

Execution strategy block **402** contains data relating to a particular execution strategy for the query. In an optional implementation, there could be multiple execution strategies for a single query, each expressed in a corresponding execution strategy block. As is known in the art of database management, the choice of an optimal query execution strategy could depend in numerous factors, including the resources allocated to a particular user or process invoking a query, the values of imported variables within the query, the state of the system, and so forth. In some implementations, in may be possible to save multiple query execution strategies, each appropriate for use under a different respective set of conditions. In general, an execution strategy block contains a strategy header **414** and at least one set of strategy instructions.

The strategy header **414** will contain specific data relating to the use of the strategy and to distinguish it from other strategies, if multiple strategies exist. For example, a strategy header may contain a strategy identifier, a strategy condition expression (i.e. a logical expression specifying one or more

conditions upon the use of the corresponding strategy), statistical data concerning prior uses of the strategy, and so forth. Header **414** is followed by a sequence of strategy instructions **415** for executing the corresponding strategy. In the preferred embodiment, these are not directly executable code, but are higher-level instructions which are interpreted by the query engine **213** to execute the query. These instructions determine whether or not indexes or other auxiliary data structures are used to search the database records and the order in which conditions are evaluated.

In accordance with the preferred embodiment, at least one strategy execution block (illustrated as block **402**) contains strategy instructions **415** including multiple subsets of strategy instructions **416-418**, each subset corresponding to a respective discrete subset of partitions in a partitioned table which is the subject of the query. Each subset **416-418** contains instructions such that, during execution, it is applied only to the subset of partitions to which it corresponds, i.e. it examines records only in the corresponding subset of partitions. This subset of partitions is referred to herein as the scope of the subset of strategy instructions. A first subset of strategy instructions is designated a default subset **416**, which is applicable to all partitions which are not within the scope of any special subset. The default set is followed by a variable number of special subsets **417**, **418** (of which two are illustrated in FIG. **4**). Each special subset of strategy instructions is applicable to some specified subset of partitions only; in the preferred embodiment, each special subset is applicable to a single specific partition, although it would alternatively be possible to construct special subsets for multiple partitions. Strategy instructions **415** may include instructions in addition to those of the various subsets, e.g., to perform a union of the results produced by the subsets of strategy instructions, to execute join operations with records from other database tables which are subject to the query, etc.

Among the functions supported by database management system **211** is the making of queries against data in database **202**, which are executed by query engine **213**. As is known, queries typically take the form of statements having a defined format, which test records in the database to find matches to some set of logical conditions. Typically, multiple terms, each expressing a logical condition, are connected by logical conjunctives such as "AND" and "OR". Because database **202** may be very large, having a very large number of records, and a query may be quite complex, involving multiple logical conditions, it can take some time for a query to be executed against the database, i.e., for all the necessary records to be reviewed and to determine which records, if any, match the conditions of the query.

The amount of time required to perform a complex query on a large database can vary greatly, depending on many factors. Depending on how the data is organized and indexed, and the conditions of the query, conditions may optimally be evaluated in a particular order, and certain auxiliary data structures such as indexes or materialized query tables may be used. Of particular interest herein, it will be noted that different partitions of the same database table may exhibit different characteristics, which would affect the choice of optimal query. For example: data skew may cause the proportion of records selected by a query (or a sub-part of the query) to be much higher in one partition than another; one partition may be much larger than another; one or more auxiliary data structures (such as indexes) might encompass only a single partition or fewer than all partitions; some partitions might be more stable than others; etc. Where a single query strategy is chosen for all partitions of a partitioned table which is the subject of the query, it is possible that this strategy is sub-optimal for some of the partitions. However, to construct a separate strategy for each partitions entails substantial overhead, which often is not justified as the differences among partitions might be of no great consequence. These and other considerations should be taken into account in determining an optimum query execution strategy.

In accordance with the preferred embodiment, a query optimizer compares certain key parameters of the various partitions to determine whether there is likely to be a significant performance benefit in separately optimizing the query for one or more partitions, as explained in greater detail herein. If the comparison of key parameters indicates that a significant performance benefit is likely, separate query optimizations are performed for the partitions so identified. If the comparison of key parameters indicates that a significant performance benefit is unlikely, then a single query execution strategy is used for all partitions. Query strategies so constructed are preferably saved in a query object **209** for later re-use. The comparison of key parameters itself can be performed with very little overhead, so that the burden of constructing separate optimized query strategies for separate partitions of a table is limited to those queries in which it is likely to produce a significant benefit.

FIG. **5** is a flow diagram illustrating at a high level the process of executing a database query, according to the preferred embodiment. Referring to FIG. **5**, a query may be initiated either as a newly defined query, or as a re-used (previously executed and saved) query, as shown by the two paths beginning at blocks **501** and **504**, respectively.

For a new query, a requesting user formulates and submits a database query using any of various techniques now known or hereafter developed (step **501**). E.g., the database query might be constructed and submitted interactively using a query interface in database management system **211**, might be submitted from a separate interactive query application program, or might be embedded in a user application and submitted by a call to the query engine **213** when the user application is executed. A query might be submitted from an application executing on system **100**, or might be submitted from a remote application executing on a different computer system. In response to receiving the query, query engine **213** parses the query into logical conditions to generate a query object (step **502**), which may be saved for re-use. The database management system invokes optimizer **212** to generate an optimized execution strategy block for the query. Generation of an optimized query execution strategy block is represented at a high level in FIG. **5** as step **503**, and shown in greater detail in FIG. **6**. Preferably, where the query is against data in a table which is partitioned into multiple partitions, the query optimizer dynamically decides whether to construct separately optimized strategies for different partitions, as described further herein with respect to FIG. **6**. After generation of a suitable execution strategy at step **503**, the database management system proceeds to step **509**.

Where an existing query is re-used, a requesting user selects the existing query object for re-use and invokes it, using any of various techniques now known or hereafter developed (step **504**). E.g., the query might be selected interactively from a menu in database management system **211**, might be submitted from a separate interactive application program, or might be embedded in a user application and submitted by a call to the query engine **213** when the user application is executed, any of which might be performed from system **100**, or from a remote system.

In response to invoking the query, query optimizer **212** determines whether a saved strategy exists in the query object **209** (step **505**). If no such strategy exists (the 'N' branch from

step **505**), the query engine invokes the optimizer to generate one (step **503**), as in the case of a new query. If a previously saved execution strategy exists for the query (the 'Y' branch from step **505**), the database management system tests determines whether the saved strategy should be used for the current query (step **506**). E.g., a strategy may have logical conditions associated with its use, or in some circumstances a strategy may be stale and should not be used as a result of changes to the database. If the saved execution strategy should not be used for any reason, then the 'N' branch is taken from step **506**, and the database management system looks for another previously saved execution strategy (step **507**), continuing then to step **505**. The database management system continues to look for execution strategies (loop at steps **505**-**507**) until a suitable strategy is found (the 'Y' branch from step **506**) or there are no more strategies (the 'N' branch from step **505**).

If a suitable pre-existing execution strategy is found, the 'Y' branch is taken from step **506**, and an execution strategy is selected (step **508**). Where multiple execution strategies are permissible, the database manager will choose one of these multiple strategies. Such a choice could be based on priorities, or any criteria or technique now known or hereafter developed, or could be arbitrary. After selecting a strategy, the database management system proceeds to step **509**.

The query engine is then invoked to execute the query according to the query execution strategy which was either generated at step **503** or selected at step **508**. Execution of a query execution strategy is represented at a high level in FIG. **5** as step **509**, and shown in greater detail in FIG. **7**. Generally, this means that the query engine retrieves selective database records according to the query execution strategy, and evaluates the logical query conditions with respect to the selected record in an order determined by the strategy, using any known technique or technique hereafter developed.

The query engine then generates and returns results in an appropriate form (step **510**). E.g., where a user issues an interactive query, this typically means returning a list of matching database entries for display to the user. A query from an application program may perform some other function with respect to database entries matching a query.

FIG. **6** shows in greater detail the process of generating a query execution strategy for a query involving a database table having multiple partitions, according to the preferred embodiment, represented in FIG. **5** as step **503**. Referring to FIG. **6**, the optimizer is invoked and generates an optimized query execution strategy for the original, unmodified query (step **601**). The generation of query execution strategies is well-known in the art, and numerous techniques exist for optimizing a query execution strategy using known characteristics of the database, such as the size of database tables, available indexes and other metadata, probable number of responsive records, and so forth. Any query optimization technique, now known or hereafter developed, may be used for generating an optimized query execution strategy. If the query is against records in a database table having partitions and the query uses the partition key, then the optimizer might eliminate from its search any partitions which, by the terms of the query, can be safely eliminated because it is known in advance that no responsive records will be in those partitions. However, in all other respects the query execution strategy constructed at step **601** has a scope which includes all partitions of any partitioned database table, i.e., the same execution strategy is used for searching the records of each partition which is not entirely eliminated from consideration by the partition key.

After generating an execution strategy, the optimizer formulates an estimate of query execution time according to the execution strategy (step **602**). Various estimation formulae are known in the art, and any appropriate formula, now know or hereafter developed, could be used.

If the database query involves a partitioned table and the estimated execution time exceeds some pre-established threshold T**1**, then the query is a suitable candidate for separate strategies for some partitions, and the 'Y' branch is taken from step **603**. The purpose of the threshold T**1** is to avoid attempts to construct separate query execution strategies for queries that will probably execute quickly anyway. In this case, the cost of constructing the separate execution strategy is likely to exceed any expected execution time saving from using separately optimized execution strategies for different partitions. The threshold T**1** may be fixed, or may be variable depending on the expected frequency of execution of the query. E.g., if it is expected that a particular query will be frequently re-used, then increased cost in generating an optimized execution strategy may be justified, and in this case it may be desirable to directly or indirectly specify a lower threshold T**1** than would be used for infrequently used, or one-time use, queries. If threshold T**1** is not exceeded, or the database tables involved in the query are not partitioned, then the 'N' branch is taken from step **603** to step **614**, and no further optimization is performed.

If the 'Y' branch is taken from step **603**, the optimizer selects a next partition from the database table (step **604**), and computes a weighted score for the selected partition (step **605**). The weighted score is intended as a relative measure of how "different" the selected partition is from the other partitions in the same database table, for purposes of generating optimized query execution strategies. If a partition is sufficiently different from the other partitions in the same table in certain key respects, then it might benefit from a separately optimized execution strategy.

In the preferred embodiment, the weighted score is a sum of three weighting factors, based on the number of indexes for the partition, the recency of the latest change to the partition, and the size of the partition, i.e.:

$$W=F1(\#\text{indexes})+F2(\text{change_time})+F3(\text{partition_size}); \quad (1)$$

where F**1**, F**2** and F**3** are suitable functions.

The term F**1**(#indexes) is intended as an approximate indicator of the existence of a useful local index for the selected partition, which is not available for other partitions of the same table. An index is often constructed over an entire database table (i.e., all the partitions within a database table having partitions), but in some cases a "local index" will be constructed for the records of a single partition (or fewer than all partitions). The general query execution strategy constructed at step **601** will only use indexes which cover the entire table, but if a separate special query execution strategy is to be constructed for a selected partition and a local index exists for that partition, there is no reason why this special query execution strategy can not use the local index. The F**1** function therefore computes the difference between the number of indexes available for the selected partition and some base number of indexes available to the partitions of the applicable table generally (the base number could be a minimum, an average, or similar measure). If the number of indexes for the selected partition exceeds the base number, there is possibly a local partition which might be useful in constructing a special query execution strategy for the selected partition. This difference might be multiplied by a

suitable weighting coefficient, or subjected to some other operator to produce the F1 term of equation (1).

The term F2(change_time) is intended as an approximate measure of the volatility of the partition, i.e. the frequency of change activity. An unusually volatile partition might benefit from a special query execution strategy because the metadata available for the partition is likely to be less reliable. In the preferred embodiment, the F2 function compares the time elapsed from the most recent change to the selected partition with the average time elapsed from the most recent change to a partition in the database table. A very low elapsed time (in comparison to the average elapsed time) indicates a more volatile partition. Since elapsed time is a relative measure, it may be expressed in any of various relative terms, such as a deviation from a mean elapsed time, and is only relevant if it is a negative deviation (i.e., a shorter than average elapsed time, or some threshold below the average elapsed time). A negative deviation may be multiplied by a suitable (negative) weighting coefficient to produce the F2 term.

The term F3(partition_size) is intended as a relative measure of the partition size, i.e., its size with respect to other partitions in the same table. An unusually large partition might benefit from a special query execution strategy because searching it consumes a disproportionate amount of resource, so that any deviation from a typical data distribution or other characterizing parameter can have a magnified effect. In the preferred embodiment, the F2 function compares the size of the selected partition with the average partition size of partitions in the table. Size is preferably determined as a relative measure, e.g., a deviation from a mean size (or some threshold above a mean size), and is only relevant if it is a positive deviation. The deviation may be multiplied by a suitable weighting coefficient to produce the F3 term.

In the preferred embodiment, the weighting coefficients are assigned so that the F1 term is generally the most significant (if non-zero), followed in significance by the F2 and F3 terms. However, in any given case this is not necessarily true.

A database table can be partitioned according to the value of a key field (partition key) in which a discrete value or a range of values is assigned to each partition, but it may also be partitioned using a hashed value. For example, the least significant bits of a record number or similar data field can be used to allocate records to partitions. The advantage of hashing is that the hash function normally allocates records nearly equally among the various partitions, so all partitions are about the same size. The disadvantage is that there is no meaningful distinction of data among the various partitions, so it is unlikely that partitions can be eliminated from any particular query. If partitions are allocated using a hashed value, then the F2 term above is considered meaningless and is not used. Since hashed values normally produce partitions of approximately the same size, it is unlikely that the F3 term will produce a significant value, and therefore only the F1 term in equation (1) is likely to be significant.

It will be observed that the F1 and F2 terms as described above are somewhat rough measures of the intended indicia. In the case of the F1 term, a local index, even if it exists, may be unusable for purposes of evaluating the query, and a simple measure of the number of indexes is not necessarily proof of a useful local index. In the case of the F2 term, a very recent change to a partition may have been mere coincidence, and does not necessarily establish a high degree of volatility. These values are used as described because they provide a simple measure of the degree to which a partition is "different" from the others for purposes of using a special query execution strategy, which can be implemented by the optimizer with relatively little overhead. However, it would alternatively be possible to use more sophisticated measures of the intended indicia. It would further be possible to use alternative or additional indicia that a partition might benefit from a separate special query execution strategy, optimized for that partition alone. These indicia could be parameters associated with a particular partition or set of partitions, or with the database or system as a whole. Such alternative or additional indicia might include any or all of the following:

(a) The existence of significant data skew in a table, e.g., if it can be predicted that most of the responsive records will be contained in one or only a few partitions;

(b) The use of a range of partition key values in a query which encompasses all of one or more partitions, but only a portion of other partitions (which can be considered a special case of data skew); or

(c) The total number of partitions is small.

Certain indicia have been described herein as a preferred method of identifying suitable partitions for special execution strategies, but the description of certain indicia is not meant to preclude the use of other indicia not described. Furthermore, although an algorithm using a "weighting formula" for ranking the partitions has been described, various alternative algorithms might be used which employ in various ways any of the indicia described herein, or other indicia, to select partitions or other portions of a database for special execution strategies.

If the weighted score according to equation (1) is greater than a pre-determined threshold T2, then the partition is a suitable candidate for a special query execution strategy. In this case the 'Y' branch is taken from step **606**, and the partition is added to a list of possible candidates in a sorted order of weighted score (step **607**). As in the case of threshold T1 used in step **603**, threshold T2 could either be fixed, or could be a variable depending on the expected frequency of use of the query, T2 generally being lower if the query is to be used more frequently. If threshold T2 is not met, the 'N' branch from step **606** is taken, and step **607** is by-passed.

If any more partitions remain in the database table, the 'Y' branch is taken from step **608**, and a next partition is selected for evaluation at step **604**. When all partitions have been so evaluated, the 'N' branch is taken from step **608**.

If the list of candidate partitions is non-empty (i.e., at least one partition's weighted score exceeded threshold T2), the 'Y' branch is taken from step **609**. The optimizer then selects up to L partitions from the candidate list having the highest weighted scores for generating of respective special execution strategies (step **610**). If there are fewer than L partitions in the candidate list, then all are selected, but in no case are more than L selected. The limit L is intended to prevent an excessive number of special execution strategies which might result from a large number of partitions and/or other factors. As in the case of thresholds T1 and T2, L might be fixed or variable. In the preferred embodiment, L is fixed at **4** partitions, it being understood that this number could vary, and that it would alternatively be possible to have no such limit L.

The optimizer then re-formulates the query as a union of queries against subsets of the database table (step **611**). E.g., if partitions A, B and C are selected for special optimization in query Q, then query Q is re-formulated as four separate queries, comprising a general query QDefault which is query Q applied to all applicable partitions of the database table except partitions A, B and C, and special queries QA, QB and QC which are query Q applied to partitions A, B and C, respectively. The reformulated query Q is the union of queries QDefault, QA, QB and QC.

The optimizer then generates a query execution strategy for each of the separate queries, i.e., the default query and the

special queries (step **612**). Preferably, these query execution strategies are generated using the same techniques used in step **601**, but using the characteristics of the corresponding partition(s) for which each query execution strategy is being generated (rather than the characteristics of the database table as a whole, as in the case of step **601**). Because the characteristics of individual partitions may vary, the resultant query execution strategies may be different from that produced earlier at step **601**. A complete query execution strategy is then generated by performing a union of the results generated by each of the separate query execution strategies (step **612**).

The general query generated at step **601**, or the separate queries generated at step **612** and joined by the union operation at step **613**, as the case may be, are then saved in an execution strategy block **402** of the query object (step **614**). This execution strategy block may additionally contain identifies, conditions or other data concerning use of the corresponding query execution strategy.

In the description above, it has been assumed for clarity of illustration that the query is against data in a single database table. As is well known in the database art, many queries involve "joins", in which data in multiple tables is examined. Where a join is involved, the process is essentially the same, but only applies to that portion of the query execution strategy instructions which examines a partitioned database table. I.e., if the query specifies a join of data in a partitioned database table with data in another table, the process illustrated in steps **603-613** and described above is used to replace, if necessary, the instructions which examine the partitioned database table, the remaining instructions (e.g., those which examine the other table and perform the join) being unaffected. It is further possible for a query to specify a join of multiple partitioned tables, in which case the process of steps **603-613** could be applied to each such table separately.

FIG. **7** shows in greater detail the process of executing a query using an execution strategy generated by query optimizer **212**, according to the preferred embodiment, represented in FIG. **5** as step **510**. This process is generally performed by query engine **213**. Execution of a strategy amounts to executing the strategy instructions **415** contained in a strategy block **402**.

Referring to FIG. **7**, the query engine may (optionally) execute a preliminary series of instructions (step **701**), and proceeds to a point where it will examine the records of a database table. At this point two divergent paths are illustrated in FIG. **7**. A first path (through steps **702-705**) represents an examination of records in a partitioned database table using multiple different execution strategies for different partitions. A second path (step **706**) represents an examination of records in a database table (which may be a partitioned database table or a non-partitioned table) using a single strategy for all portions of the table.

Where multiple different query execution strategies were generated for a different partitions of a partitioned table (at step **503**), the multiple strategies are executed by executing the query execution strategy instructions **416** for the default partitions (step **702**), followed by query execution strategy instructions **417** for partition A (step **703**), followed by query execution strategy instructions **418** for partition B (step **704**), and so on for each of the special execution strategies. The union of the results sets generated by these multiple query execution strategies is then formed (step **705**) as the results set for the partitioned database table as a whole.

Where a single query execution strategy was generated, the instructions of this strategy are executed to examine the table or all applicable partitions of the database table (step **706**), thereby generating a result set.

The query engine then executes the remaining strategy instructions, if any (step **707**). If only data from a single database table is subject to the query, then steps **701** and **707** might involve few or no instructions. However, where the query involves a join of data from multiple tables, then examination of one or more other tables might be performed in either step **701** or **707** or both.

Among the advantages of the technique described herein as a preferred embodiment is the relatively limited overhead. A decision can efficiently be made whether to construct separate execution strategies for separate partitions, and in those cases where it is determined not to construct such a strategy, very little resource has been devoted to making the decision. Where separate strategies are constructed, the optimizer will consume significant resources, but this will only be done where there is some indication that such strategies are likely to produce significantly improved execution. Furthermore, the technique described herein can be used in conjunction with, and does not foreclose the use of, other independent techniques for choosing or constructing an optimum query execution strategy.

In the preferred embodiment described above, the generation and execution of the query is described as a series of steps in a particular order. However, it will be recognized by those skilled in the art that the order of performing certain steps may vary, and that variations in addition to those specifically mentioned above exist in the way particular steps might be performed. In particular, the manner in which queries are written, parsed or compiled, and stored, may vary depending on the database environment and other factors. Furthermore, it may be possible to present the user with intermediate results during the evaluation phase.

In the preferred embodiment described above, individual partitions are evaluated as candidates for respective special query execution strategies, and determinations whether to construct special query execution strategies are made with respect to individual partitions. However, it would alternatively be possible to group discrete sets of partitions together for purposes of constructing special query execution strategies, or to construct special query execution strategies for discrete subsets of a database table other than partitions or sets of partitions.

In general, the routines executed to implement the illustrated embodiments of the invention, whether implemented as part of an operating system or a specific application, program, object, module or sequence of instructions, are referred to herein as "programs" or "computer programs". The programs typically comprise instructions which, when read and executed by one or more processors in the devices or systems in a computer system consistent with the invention, cause those devices or systems to perform the steps necessary to execute steps or generate elements embodying the various aspects of the present invention. Moreover, while the invention has and hereinafter will be described in the context of fully functioning computer systems, the various embodiments of the invention are capable of being distributed as a program product in a variety of forms, and the invention applies equally regardless of the particular type of signal-bearing media used to actually carry out the distribution. Examples of signal-bearing media include, but are not limited to, volatile and non-volatile memory devices, floppy disks, hard-disk drives, CD-ROM's, DVD's, magnetic tape, and so forth. Furthermore, the invention applies to any form of signal-bearing media regardless of whether data is exchanged from one form of signal-bearing media to another over a transmission network, including a wireless network.

Examples of signal-bearing media are illustrated in FIG. **1** as system memory **102**, and as data storage devices **125-127**.

Although a specific embodiment of the invention has been disclosed along with certain alternatives, it will be recognized by those skilled in the art that additional variations in form and detail may be made within the scope of the following claims:

What is claimed is:

1. A method for executing a database query in a computer system, comprising the computer-executed steps of:

automatically selecting one or more candidate partitions of a partitioned database table for determining separate query execution strategies to be used for evaluating said database query, said partitioned database table having multiple previously defined partitions, each partition having a common definitional structure and comprising a respective disjoint subset of records of said partitioned database table, said candidate partitions comprising at least one and fewer than all previously defined partitions of said partitioned database table, said one or more candidate partitions being automatically selected without determining whether execution of said database query can benefit from using a separate query execution strategy for evaluating said database query against any said previously defined partition by using at least one criterion from the set of criteria consisting of: (a) at least one parameter indicating the existence of at least one local index for a partition of said partitioned database table; (b) at least one parameter indicating volatility of a partition of said partitioned database table; and (c) at least one parameter indicated a relative size of a partition of said partitioned database table; and

responsive to automatically selecting one or more candidate partitions of a partitioned database table, automatically generating multiple separate query execution strategies for evaluating said database query, each of said multiple separate query execution strategies being used for evaluating said database query against a different respective disjoint non-empty set of partitions of said partitioned database table, and automatically generating a union of a respective results set of each said separate query execution strategy.

2. The method for executing a database query of claim **1**, wherein said step of automatically selecting one or more candidate partitions of a partitioned database table comprises the computer-executed steps of:

automatically computing a respective weighted score for each of a plurality of said partitions, said weighted score being based on one or more parameters of said database, said weighted score being computed without reference to said database query; and

comparing each said weighted score to a pre-determined threshold value.

3. The method for executing a database query of claim **2**, wherein said step of automatically selecting one or more candidate partitions of a partitioned database table further comprises the computer-executed steps of:

if said weighted score for any said partitions exceeds said pre-determined threshold value, then automatically ranking said partitions having respective weighted scores in excess of said pre-determined threshold value according to their respective weighted scores; and

selecting one or more said partitions as said candidate partitions according to rank established by said automatically ranking step.

4. The method for executing a database query of claim **1**, further comprising the computer-executed steps of:

automatically constructing a common query execution strategy for evaluating said database query against all said partitions of said partitioned database table;

automatically estimating an execution time for said common query execution strategy; and

performing said step of automatically selecting one or more candidate partitions of a partitioned database table for determining separate query execution strategies to be used for evaluating said database query only if the estimated execution time for said common query execution strategy exceeds a pre-determined threshold.

5. The method for executing a database query of claim **4**, wherein said step of automatically generating a respective separate query execution strategy for evaluating said database query against each candidate partition of said candidate partitions of said database table further comprises computer-executed steps of:

automatically constructing a revised common query execution strategy for evaluating said database query against all said partitions of said database table for which no separate query execution strategy is constructed.

6. The method for executing a database query of claim **1**, wherein said step of automatically selecting one or more candidate partitions of a partitioned database table comprises using at least one comparative criterion which compares a respective parameter of each said partition with a composite of said respective parameters derived from all of said partitions.

7. The method for executing a database query of claim **1**, further comprising the computer-executed steps of:

automatically executing said multiple separate query execution strategies and said union of results sets; and

saving said multiple separate query execution strategies and said union of results sets in a persistent query object for re-execution.

8. A computer program product for database query optimization comprising:

a plurality of computer-executable instructions recorded on non-transitory computer-readable media, wherein said instructions, when executed by at least one computer system, cause the at least one computer system to perform:

receiving a database query against information in a database table having multiple previously defined partitions, each said partition having a common definitional structure and comprising a respective disjoint subset of records of said partitioned database table;

selecting one or more candidate partitions of said partitioned database table for determining separate query execution strategies to be used for evaluating said database query, said one or more candidate partitions comprising at least one and fewer than all said previously defined partitions of said partitioned database table, said one or more candidate partitions of said partitioned database table being selected without determining a hypothetical query execution strategy for separately evaluating said database query against any said previously defined partition by using at least one criterion from the set of criteria consisting of: (a) at least one parameter indicating the existence of at least one local index for a partition of said partitioned database table; (b) at least one parameter indicating volatility of a partition of said

partitioned database table; and (c) at least one parameter indicated a relative size of a partition of said partitioned database table; and

responsive to selecting one or more candidate partitions of said partitioned database table, generating multiple separate query execution strategies for evaluating said database query, each of said multiple separate query execution strategies being used for evaluating said database query against a different respective disjoint non-empty set of partitions of said partitioned database table, and automatically generating a union of a respective results set of each said separate query execution strategy.

9. The computer program product of claim **8**, wherein said selecting one or more candidate partitions of said partitioned database table comprises:

computing a respective weighted score for each of a plurality of said partitions of said partitioned database table, said weighted score being based on parameters of said database without reference to said database query; and

comparing each said weighted score to a pre-determined threshold value.

10. The computer program product of claim **9**, wherein said selecting one or more candidate partitions of said partitioned database table further comprises:

if said weighted score for any said partition exceeds said pre-determined threshold value, then ranking said partitions having respective weighted scores in excess of said pre-determined threshold value according to their respective weighted scores; and

selecting one or more said partitions for generating respective separate query execution strategies according to rank established by said ranking said partitions.

11. The computer program product of claim **8**, wherein said selecting one or more candidate partitions of said partitioned database table comprises using at least one comparative criterion which compares a respective parameter of each said partition with a composite of said respective parameters derived from all of said partitions.

12. The computer program product of claim **8**, wherein said instructions, when executed by said at least one computer system, further cause the at least one computer system to perform:

responsive to receiving said database query, constructing a common query execution strategy for evaluating said database query against all said partitions of said partitioned database table;

estimating an execution time for said common query execution strategy; and

performing said selecting one or more candidate partitions of said partitioned database table for determining separate query execution strategies to be used for evaluating said database query only if the estimated execution time for said common query execution strategy exceeds a pre-determined threshold.

13. A computer system, comprising:

at least one processor;

a data storage for storing a database, said database containing a partitioned database table having a plurality of partitions, each said partition having a common definitional structure and comprising a respective disjoint subset of records of said partitioned database table;

a database management facility embodied as a plurality of instructions executable on said at least one processor, said database management facility including a query engine which executes logical queries against said database including logical queries against said partitioned database table and a query optimizer for generating execution strategies for executing logical queries against said database;

wherein said database management facility automatically selects, with respected to each of a plurality of said logical queries against data in said database, a respective one or more candidate partitions of said partitioned database table for determining separate query execution strategies to be used for evaluating the respective logical query against data in said database, by using at least one criterion from the set of criteria consisting of: (a) at least one parameter indicating the existence of at least one local index for a partition of said partitioned database table; (b) at least one parameter indicating volatility of a partition of said partitioned database table; and (c) at least one parameter indicating a relative size of a partition of said partitioned database table; and

wherein, responsive to selecting a respective one or more candidate partitions of said partitioned database table, said database management facility automatically generates multiple separate query execution strategies for evaluating the respective logical query, each of said multiple separate query execution strategies being used for evaluating the respective logical query against a different respective disjoint non-empty set of partitions of said partitioned database table, and automatically generates a union of a respective results set of each said separate query execution strategy.

14. The computer system of claim **13**, wherein said database management facility automatically selects a respective one or more candidate partitions by computing a respective weighted score for each of a plurality of said partitions, each weighted score being based on parameters of said database without reference to the respective logical query, and comparing each said weighted score to a pre-determined threshold value.

15. The computer system of claim **14**, wherein said database management facility automatically selects a respective one or more candidate partitions by ranking any said partitions having respective weighted scores in excess of said pre-determined threshold according to their respective weighted scores, and selecting one or more said partitions as candidate partitions according to the rank thereby established.

16. The computer system of claim **13**, wherein said database management facility automatically selects a respective one or more candidate partitions by constructing a common query execution strategy for evaluating said database query against all said partitions of said partitioned database table, estimating an execution time for said common query execution strategy, and determining that multiple separate query execution strategies should be used only if the estimated execution time for said common query execution strategy exceeds a pre-determined threshold.

17. The computer system of claim **13**, wherein said database management facility automatically determining whether multiple separate query execution strategies should be used by using at least one comparative criterion which compares a respective parameter of each said partition with a composite of said respective parameters derived from all of said partitions.

* * * * *