

Finally, custom encodings allow you to create your own encodings, albeit remaining true to the audio, video, and mixed encodings formats. An example is shown here:

```
encoding=custom&key=value
```

A Brief Overview of Sampled Audio

Digitally recorded audio data is often referred to as sampled audio. This section gives you a brief overview of the concepts behind sampled audio. You can skip this section if you have a fair understanding of this concept.

Sampled audio represents successive *samples* of audio data. Audio data, in physical terms, is represented as a signal (of a sound wave). By taking discrete samples of the amplitude of a sound wave and representing it using bits and bytes, digital audio data is generated. In a sense, sampled audio is only an approximation of the actual sound wave because you are taking samples of the original and not recreating the whole thing.

This implies that the quality of sampled audio depends on how many samples you take per second. This is true; however, the quality of the finished samples also depends on how you represent them digitally. The more bits used to represent each sample, the better it represents the original audio data accurately.

These two measurements are then a representation of sampled audio. The first, which is effectively a measurement of resolution in time, is called the *sampling rate*. The second, which is the resolution in amplitude, is called *quantization* (or just *resolution*). For example, the music on CDs has a sample rate of 44.1 KHz and a quantization of 16 bits per sample. So, sampled audio on a CD has been sampled 44,100 times per second, and each sample is represented using 16 bits. As a comparison, DVD is sampled at 48 KHz to 96 KHz, and professional recording equipment boasts of sample rates of 192 KHz.

This process of producing sampled audio from analog signals is called Pulse Code Manipulation (PCM). The format on its own is not very efficient, because it doesn't deal with redundancy of samples, thereby taking up a lot of space. By using compression algorithms such as MP3, a PCM-encoded sample can be reduced to contain the same amount of data in a smaller sample size. This has led to the tremendous popularity of using MP3, which produces CD-quality (and better) sound in smaller files. In purely technical terms, MP3 is a compression format of the PCM encoded signal and works by discarding samples not considered valuable for hearing.

Storing Sampled Audio

Although sampled audio is mostly encoded using PCM, it can be saved in a variety of formats for transmission, retrieval, and playback. You may be already familiar with the common storage formats, such as WAV, AU, MP3, AIFF, and so on. These file formats contain information about the sampled audio, but may also contain meta information about the file itself, including information about the size, the format, size of frames, and so on. Typically, this information is contained in the file header.

These files are differentiated by the compression offered in the stored data. As stated earlier, MP3 is an example of a compressed file, where the quality of the file is degraded to conserve space by getting rid of some samples. On the other hand, WAV, AIFF, and AU are uncompressed formats and contain the closest representation of the original sampled data; however, the file

size is an issue. There are other formats that guarantee not to lose any samples and yet compress the audio data, but these aren't very popular. For one thing, the compression is nowhere near that offered by MP3 compression. An example of such a format is True Audio (TTA).

Another popular format, especially as far as Java ME development is concerned, is the Adaptive Multi-Rate (AMR) format, which is a standard adapted by the 3rd Generation Participation Project (3GPP). This format is like MP3, in that it's a compression algorithm that loses quality of the original samples by dropping samples it considers unnecessary for transmission or playback. It specifies a varying number of bit rates, which is simply the number of bits of the sampled data that it can transmit per second. This format is extended to the AMR-Wide Band (WB), which offers a higher speech quality because of its support for a wider speech bandwidth than the AMR format. For this reason, the original AMR format is also referred to as AMR-Narrow Band (AMR-NB).

One final thing to note here is that the WAV file format cannot be used for streaming audio data, because the format requires the complete file data for calculating header information as opposed to the MP3 or AMR formats, which support streaming seamlessly.

Controlling Sampled Audio

Unlike video, sampled audio doesn't require anything extra, other than what you have already learned, to play it. In fact, the way that MMAPI is designed, tones and MIDI, along with sampled audio, can be played without distinguishing between them. If anything, they differ in the controls that are provided for controlling them. MIDI provides `MIDIControl`, and tones provide `ToneControl`, whereas sampled audio provides a variety of controls, most of which you have already come across in some form or another.

For example, `VolumeControl` was covered in Chapters 4 and 7, and the basics of using it with sampled audio remain the same. The same applies to `RateControl` and `PitchControl`, both of which were covered in Chapter 7. Therefore, this section covers the two controls that haven't been covered yet, `MetaDataControl` and `StopTimeControl`.

Note `MetaDataControl` and `StopTimeControl` are not exclusively for use with sampled audio, but like `VolumeControl`, their use applies to all media data that supports sampled audio.

Setting Preset Stop Times with `StopTimeControl`

Being able to set a preset stop time for media data may not sound very useful, but it can come in very handy when you want a precise action to happen at a particular instance. This is because when the `Player` instance stops at the preset time, the `STOPPED_AT_TIME` event is fired, which you can capture and act on.

Of course, not all media types, and for that matter, not all implementations, support `StopTimeControl`. This is to say that some MMAPI implementations may support this control, but only for certain media types. It's hard to judge which media types support this control, because unlike the `getSupportedContentTypes(String protocol)` and `getSupportedProtocols(String contentType)` methods, there is no corresponding `getSupportedControls(String contentType)` method. As you know, the `getControls()` and `getControl()` methods only work after a `Player` instance has been prefetched.

Listing 8-2 provides an example of using `StopTimeControl`. The code creates a `Player` instance that can be started with or without a `StopTimeControl` being used to preset a stop time. However, the `Player` instance remains the same, whether you are using a `StopTimeControl` or not, and you'll notice varying results due to this. An explanation follows the code listing, and Figure 8-3 shows the MIDlet in use in the Motorola C975 emulator.

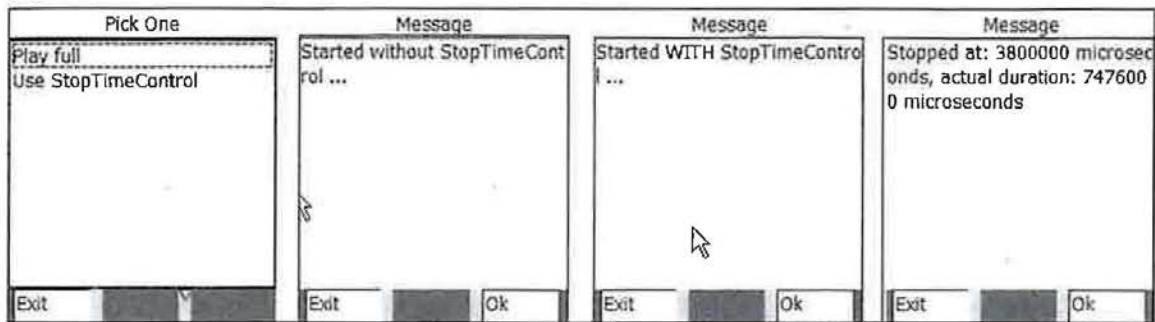


Figure 8-3. Running `StopTimeControlMIDlet` in Motorola C975

Figure 8-3 shows the `StopTimeControlMIDlet` in action, with the two different scenarios played out.

Listing 8-2. *StopTimeControlMIDlet Allows You to Play with the StopTimeControl*

```
package com.apress.chapter8;

import javax.microedition.midlet.*;
import javax.microedition.lcdui.*;
import javax.microedition.media.*;
import javax.microedition.media.control.*;

public class StopTimeControlMIDlet extends MIDlet
    implements CommandListener, PlayerListener {

    // the display items
    private Display display = null;
    private Alert alert = null;
    private List list = null;

    // commands
    private Command exitCommand = null;
    private Command okCommand = null;

    // player and controls
    private Player player = null;
    private StopTimeControl stControl = null;

    public StopTimeControlMIDlet() {
```

```
// create all the basic stuff
display = Display.getDisplay(this);

alert = new Alert("Message");

exitCommand = new Command("Exit", Command.EXIT, 1);
okCommand = new Command("Ok", Command.OK, 1);

alert.addCommand(exitCommand);

list = new List("Pick One", List.IMPLICIT);
list.append("Play full", null);
list.append("Use StopTimeControl", null);

list.addCommand(exitCommand);
alert.addCommand(okCommand);

alert.setCommandListener(this);
list.setCommandListener(this);

// create the player and the stoptimecontrol
try {
    player = Manager.createPlayer(
        getClass().getResourceAsStream(
            "/media/audio/chapter8/printer.wav"), "audio/x-wav");

    player.addPlayerListener(this);

    player.prefetch();

    stControl = (StopTimeControl)player.getControl(
        "javax.microedition.media.control.StopTimeControl");

    // no point continuing if stoptimecontrol is not supported
    if(stControl == null)
        throw new Exception("StopTimeControl is not supported");
} catch(Exception e) {
    error(e);
}

}

public void startApp() {
    // show the list of items
    display.setCurrent(list);
}

public void pauseApp() {
}
```



```
public void destroyApp(boolean unconditional) {  
}  
  
public void commandAction(Command cmd, Displayable disp) {  
  
    // if exiting  
    if(cmd == exitCommand) {  
        notifyDestroyed();  
        return;  
    }  
  
    // if ok command  
    if(cmd == okCommand) {  
        try {  
            // pause the player, so that it can be reused  
            player.stop();  
  
            // and redisplay the list  
            display.setCurrent(list);  
        } catch(Exception e) {  
            error(e);  
        }  
    }  
}  
  
// implicit list handling  
if(disp == list) {  
  
    // the selected idx  
    int selectedIdx = list.getSelectedIndex();  
  
    // show the message  
    display.setCurrent(alert);  
  
    try {  
        if(selectedIdx == 0) {  
            // start player without stoptimecontrol  
            if(player != null) player.start();  
            alert.setString("Started without StopTimeControl ...");  
        } else {  
  
            // start with stoptimecontrol  
  
            // set the stop time as half of the length  
            stControl.setStopTime(player.getDuration()/2);  
  
            // start the player  
            if(player != null) player.start();  
        }  
    }  
}
```

```

        alert.setString("Started WITH StopTimeControl ...");
    }
} catch(Exception e) {
    error(e);
}
}

public void playerUpdate(Player player, String event, Object eventData) {

    // only interested in the STOPPED_AT_TIME event
    if(event == STOPPED_AT_TIME) {
        // give the message
        alert.setString("Stopped at: " + eventData + " microseconds" +
            ", actual duration: " + player.getDuration() + " microseconds");

        // and show the alert
        alert.setTimeout.Alert.FOREVER);
        display.setCurrent(alert);
    }
}

// general purpose error method, displays onscreen as well to output
private void error(Exception e) {
    alert.setString(e.getMessage());
    alert.setTitle("Error");
    alert.setTimeout.Alert.FOREVER);
    display.setCurrent(alert);
    e.printStackTrace();
}
}

```

If you try this MIDlet in an emulator or a device and test it repeatedly, you'll notice some anomalous results. As per the code, when using the `StopTimeControl`, the `Player` instance is preset to stop playing when exactly half the duration has been reached. Figure 8-4 shows one such anomaly.




Figure 8-4. *StopTimeControl seems to stop after the preset time.*

Figure 8-4 seems to suggest that the `Player` instance was stopped after the preset time, which being half of the total duration, should be roughly 373,800 microseconds. This happened because in this particular case, the `StopTimeControl`'s `setStopTime(long stopTime)` method was called *after* the media playback time of the `Player` instance had passed the preset time. In such cases, that is, when the current media time has already passed the preset time, the `Player` instance immediately stops at the current media time and generates a `STOPPED_AT_TIME` event.

You can remove a previously set preset time by using the constant `RESET`. Thus, `setStopTime(StopTimeControl.RESET)` will clear any preset times. Calling the `getStopTime()` method returns the preset time (remember, in microseconds, *not* milliseconds) and `RESET` if no preset time has been set.

Finally, if you call `setStopTime()` method on a *started* `Player` instance, which already has a preset time, an `IllegalStateException` is thrown. However, you can change the preset time on a stopped `Player` instance, as is done in Listing 8-2.

Gathering Information Using `MetaDataControl`

`MetaDataControl` provides a simple way for `Player` instances to expose the meta information about media data. This meta information can be exposed with a set of predefined keys, such as `Author`, `Title`, `Date`, and `Copyright`, or the media may contain its own proprietary keys (with associated values).

As with `StopTimeControl`, not all media exposes this control. WAV and MP3 in sampled audio and MPEG in video are the most likely candidates that will provide meta information such as this. This doesn't mean that other media doesn't contain this information, just that the `MMAPI` implementation may not provide the `MetaDataControl` control for it.

Listing 8-3 shows you an example of using this control, where the information contained in an MP3 is displayed on the screen.

Listing 8-3. *Using `MetaDataControl` to Display Meta Information*

```
package com.apress.chapter8;

import javax.microedition.midlet.*;
import javax.microedition.lcdui.*;

import javax.microedition.media.*;
import javax.microedition.media.control.MetaDataControl;

public class MetaDataControlMIDlet extends MIDlet implements CommandListener {

    // define the display items
    private Display display = null;
    private List list = null;
    private Command exitCommand = null;
    private Alert alert = null;

    // the player instance
    private Player player = null;
```

```
public MetadataControlMIDlet() {

    // create the display items
    display = Display.getDisplay(this);
    alert = new Alert("Message");
    exitCommand = new Command("Exit", Command.EXIT, 1);
    alert.addCommand(exitCommand);
    alert.setCommandListener(this);

    list = new List("Message", List.IMPLICIT);
    list.addCommand(exitCommand);

    list.setCommandListener(this);

    // create and prefetch the player instance
    try {
        player = Manager.createPlayer(
            getClass().getResourceAsStream(
                "/media/audio/chapter8/frogs.mp3"), "audio/mp3");

        player.prefetch();
    } catch (Exception e) {
        error(e);
    }
}

public void startApp() {

    // if player was created, extract control
    if(player != null) {

        MetadataControl mControl =
            (MetadataControl)player.getControl(
                "javax.microedition.media.control.MetadataControl");

        // if control is provided, show information onscreen
        if(mControl == null) {

            // no info
            alert.setString("No Meta Information");
            display.setCurrent(alert);
        } else {

            // get all the keys of this control
            String[] keys = mControl.getKeys();

            // and append the key and its value to the list
            for(int i = 0; i < keys.length; i++) {
```

```

        list.append(keys[i] + " -- " + mControl.getKeyValue(keys[i]), null);
    }

    // show the list
    display.setCurrent(list);
}
}

public void commandAction(Command cmd, Displayable disp) {
    if(cmd == exitCommand) {
        notifyDestroyed();
    }
}

public void pauseApp() {
}

public void destroyApp(boolean unconditional) {
}

// general purpose error method, displays onscreen as well to output
private void error(Exception e) {
    alert.setString(e.getMessage());
    alert.setTitle("Error");
    alert.setTimeout(Alert.FOREVER);
    display.setCurrent(alert);
    e.printStackTrace();
}
}

```

As you can see, to get a list of keys, you use the method `getKeys()`, which returns a `String` array. There are four predefined keys in the `MetaDataControl` class: `AUTHOR_KEY`, `TITLE_KEY`, `COPYRIGHT_KEY`, and `DATE_KEY`. After you have the keys, whether predefined or retrieved using the `getKeys()` method, you can use the `getKeyValue()` method to get the value assigned to each key.

Figure 8-5 shows this MIDlet running in the Motorola C975 device, with only the title key showing a value. The Motorola C975 emulator doesn't support the playback of MP3 audio.



Figure 8-5. Using `MetaDataControl` to display meta information

Mixing Sampled Audio, MIDI, and Tones

One of the properties listed in Table 8-1, `supports.mixing`, indicates whether a particular MMAPI implementation supports the concept of multiple `Player` instances for sampled audio and tones. If true, it indicates that mixing is supported; in short, you can have multiple `Player` instances for audio, MIDI, and tone playback, playing simultaneously. Multiple `Player` instances mostly equals to a maximum of two or three, although different implementations vary in their support of simultaneous instances. There is no sure way of knowing how many instances you can create for mixing, and the Java ME documentation for your device may give an answer. Of course, you have to be careful creating too many `Player` instances, as this will result in a memory hog, especially prefetched and/or realized instances.

The concept of an implementation supporting mixing is slightly more advanced than just being able to support multiple instances of `Player` objects in memory. When a `Player` instance, created to play back sampled audio, MIDI, or tone, is in the `PREFETCHED` state, it has acquired the resources required to immediately play back. This means that it has exclusive access to the device's resources, especially the audio output hardware. Thus, the MMAPI implementation that supports mixing must switch intelligently and efficiently between `Player` instances to manage the flow of media data without any errors, using either a software or hardware mixer. This is why most implementations eschew audio mixing, because it becomes too complicated to implement, or provide a simplified version that only caters for specific possibilities.

The Motorola C975 device only implements MIDI mixing (that is, two or more MIDI `Player` instances playing simultaneously) and doesn't support the mixing of either audio or tones, even though it returns a true value for the `supports.mixing` property. However, it does support the mixing of a MIDI file with a WAV file, as long as the MIDI file is started first *and* the WAV file is a PCM encoded, single channel (mono), 8,000 KHz, 8-bit file. Go figure! Siemens M75 doesn't support any mixing and indicates so with a value of false for the property.

Note This is another case of device manufacturers not sticking with the intent of the MMAPI specification and providing an arbitrary implementation. As per the specification, if `supports.mixing` returns true, the MMAPI implementation must be able to support the playback of two sampled audio `Player` instances simultaneously. For what it's worth, Motorola is not the only device manufacturer guilty of providing an arbitrary implementation.

One of the most common requirements of mixing sampled audio, MIDI, and/or tones is in Java ME games. Most games have a background score playing continuously, while short audio events will accompany some action on the screen. In these cases, you'll have one `Player` instance playing the background score in a loop and other prefetched instances that start playing a short sound such as firing, jumping, opening doors, and so on, depending on the user interaction with the action on the screen.

Listing 8-4 shows an example of mixing a MIDI file with a sampled audio WAV file (as per the Motorola C975 specification!) and another MIDI event. The MIDI event is a fire sound, implemented by issuing the program change (instrument change) of "Gunshot" (see Chapter 7, Figure 7-6). The main MIDI sound is a background score that plays continuously, and the audio WAV file is a short sound that mimics a character jumping onscreen. When the user presses the Jump! command, the corresponding `Player` instance is started to play the sound. When the user presses the Fire! command, a `shortMidiEvent()` command is issued. During all this, the background score continues to play.

Listing 8-4. *Mixing MIDI and Sampled Audio*

```
package com.apress.chapter8;

import javax.microedition.midlet.*;
import javax.microedition.lcdui.*;
import javax.microedition.media.*;
import javax.microedition.media.control.MIDIControl;

public class MixingAudioMIDlet extends MIDlet implements CommandListener {

    // define Players and Controls
    private Player backgroundPlayer = null;
    private Player firePlayer = null;
    private Player jumpPlayer = null;
    private MIDIControl mControl = null;

    // define commands and display items
    private Display display = null;
    private Alert alert = null;
    private Command exitCommand = null;
    private Command fireCommand = null;
    private Command jumpCommand = null;

    public MixingAudioMIDlet() {

        // create the display items
        display = Display.getDisplay(this);

        // this is the alert that will be displayed
        alert = new Alert("Message");
        alert.setString("Playing background score. " +
            " Use menu to mix sampled audio and/or other midi");
        alert.setTimeout(Alert.FOREVER);

        // create the commands
        exitCommand = new Command("Exit", Command.EXIT, 1);
        fireCommand = new Command("Fire!", Command.SCREEN, 1);
        jumpCommand = new Command("Jump!", Command.SCREEN, 1);

        // attach the commands to the alerts
        alert.addCommand(exitCommand);
        alert.addCommand(fireCommand);
        alert.addCommand(jumpCommand);

        // and set the command listener
        alert.setCommandListener(this);
    }
}
```



```
// finally create the Player instances
initPlayers();
}

private void initPlayers() {

    try {

        // the background player that will play a MIDI file throughout
        backgroundPlayer =
            Manager.createPlayer(getClass().getResourceAsStream(
                "/media/midi/chapter8/cabeza.mid"), "audio/midi");

        // prefetch it and make sure it repeats if it finishes
        backgroundPlayer.prefetch();
        backgroundPlayer.setLoopCount(-1);

        // create another MIDI Player for the firing sound
        firePlayer = Manager.createPlayer(Manager.MIDI_DEVICE_LOCATOR);
        firePlayer.prefetch();

        // extract its MIDIControl
        mControl = (MIDIControl)firePlayer.getControl(
            "javax.microedition.media.control.MIDIControl");

        // set program to the Gunshot sound (See Figure 7-6 in Chapter 7)
        mControl.setProgram(11, -1, 127);

        // create another sampled audio player for jump sound
        jumpPlayer = Manager.createPlayer(getClass().getResourceAsStream(
            "/media/audio/chapter8/jump.wav"), "audio/x-wav");

        // prefetch it as well
        jumpPlayer.prefetch();

    } catch (Exception e) {
        error(e);
    }
}

public void startApp() {

    // start background player
    try {
        if(backgroundPlayer != null) {
            backgroundPlayer.start();
        }
    }
```



```
} catch(Exception e) {
    error(e);
}

// and show message
display.setCurrent(alert);
}

public void commandAction(Command cmd, Displayable disp) {

    // if closing
    if(cmd == exitCommand) {
        destroyApp(true);
        notifyDestroyed();
        return;
    }

    try {

        // if fire command is issued, send the NOTE_ON command
        if(cmd == fireCommand) {
            mControl.shortMidiEvent(MIDControl.NOTE_ON | 11, 60, 100);
        }

        // if jump command is issued, start the jump player
        if(cmd == jumpCommand) {
            jumpPlayer.start();
        }
    } catch(Exception e) {
        error(e);
    }
}

public void pauseApp() {

    // pause any players if MIDlet is paused
    try {
        if(backgroundPlayer != null) backgroundPlayer.stop();
        if(firePlayer != null) firePlayer.stop();
        if(jumpPlayer != null) jumpPlayer.stop();
    } catch(Exception e) {
        error(e);
    }
}

public void destroyApp(boolean unconditional) {
```

```

// close players once application is destroyed
try {
    if(backgroundPlayer != null) {
        backgroundPlayer.close();
        backgroundPlayer = null;
    }
    if(firePlayer != null) { firePlayer.close(); firePlayer = null; }
    if(jumpPlayer != null) { jumpPlayer.close(); jumpPlayer = null; }
} catch(Exception e) {
    error(e);
}

// general purpose error method, displays onscreen as well to output
private void error(Exception e) {
    alert.setString(e.getMessage());
    alert.setTitle("Error");
    display.setCurrent(alert);
    e.printStackTrace();
}
}

```

Figure 8-6 shows this MIDlet playing in the C975 device. The Jump! command is accessed by pressing the Menu button.



Figure 8-6. *Mixing MIDI and audio in the Motorola C975 device*

Capturing Audio

An implementation supports capture of audio via a MIDlet if it returns true for the `supports.audio.capture` system property. If this property is true, then the `audio.encoding` system property must not return null, but must provide the formats in which audio can be recorded. The Motorola C975 device supports the `audio/amr` and `audio/amr-wb` (Wide band) formats.

To capture media, you use the `RecordControl` control, whether for audio or video. This control doesn't distinguish between the media types and is a simple mechanism to start, stop, and control the data recording. It provides several methods to achieve these tasks.

A `Player` instance to capture audio is created by passing the special locator `capture://audio` to the `Manager.createPlayer(String locator)` method, which will then, once realized,

give up a `RecordControl` object for you to use. While creating the locator, you can pass parameters to it, which qualifies the format of the recorded data, as you learned in the “Understanding Media Encodings” section. When no format is specified, the format (content-type) of the recorded data is the default (the first value returned by `audio.encodings`) format. Thus, for the C975 device, the default recording format for audio is `audio/amr`.

Of course, recorded data must be either stored somewhere or played back to the user (and then discarded). `RecordControl` provides two methods for setting the location of recorded data. The `setRecordStream(OutputStream stream)` directs data to an `OutputStream`, and `setRecordLocation(String locator)` directs it to the location in the form of locators used to create `Player` instances using the `Manager.createPlayer(String locator)` method. Of course, you should be able to store data at the particular location identified by the locator `String`.

Tip Recording formats impact the way the MMAPI implementation handles them internally. For formats that can't be streamed, such as WAV for sampled audio and Quicktime for video, the full media data is required before it can be written to any location. This is because some portions in the header of these files require the availability of the full data, and this header will be written to when the complete recorded data is available. When you are recording data like this, the implementation needs to provide an internal buffer that will hold this data till the recording is complete, calculate the missing header information, and then write it to your desired location, either a stream (`setRecordStream()`) or location (`setRecordLocation()`). With data that can be streamed, such as MP3 for audio and MPEG for video, this is not a problem, and the data can be written to your desired location at the same time that it's read. This is why you are not likely to find too many devices with MMAPI implementations that support recording in a nonstreamable format.

Recording data itself requires permission from the user. As you saw in Chapter 5, permissions can be requested for in a JAD file (and put in a trusted domain). To record any media (audio or video), the following permission must be available:

```
javax.microedition.media.control.RecordControl
```

Alternatively, the user will be queried to give the permission when the recording commences.

Let's start by creating a `MIDlet` that will play back whatever you say to it, instead of storing it somewhere.

Timed Capture and Playback

Simple capture and playback of audio can be accomplished easily by using the two streams, `ByteArrayOutputStream` and `ByteArrayInputStream`. Because data doesn't need to be stored anywhere, one `Player` instance can be used to record the raw audio data into the `ByteArrayOutputStream`'s byte array, and another instance created to retrieve data from this buffer using the `ByteArrayInputStream`. Of course, you can't expect the data to be recorded continuously. For this example, the timed limit is 10 seconds.

Listing 8-5 shows the code for this timed audio capture and playback `MIDlet`.

Listing 8-5. *Timed Capture and Playback of Audio*

```
package com.apress.chapter8;

import javax.microedition.midlet.*;
import javax.microedition.lcdui.*;
import javax.microedition.media.*;
import java.io.ByteArrayOutputStream;
import java.io.ByteArrayInputStream;
import javax.microedition.media.control.RecordControl;

public class CapturePlaybackAudioMIDlet extends MIDlet
    implements CommandListener {

    // the display items
    private Display display = null;
    private Alert alert = null;
    private Command exitCommand = null;

    // players and controls
    private Player capturePlayer = null;
    private Player playbackPlayer = null;
    private RecordControl recordControl = null;

    // buffers
    private ByteArrayOutputStream bos = new ByteArrayOutputStream();
    private ByteArrayInputStream bis = null;

    public CapturePlaybackAudioMIDlet() {

        // create the display
        display = Display.getDisplay(this);
        alert = new Alert("Message");
        alert.setTimeout(Alert.FOREVER);
        alert.setString("Capturing for 10 seconds. Say something intelligent!");
        exitCommand = new Command("Exit", Command.EXIT, 1);
        alert.addCommand(exitCommand);
        alert.setCommandListener(this);

        try {
            // create the capture player
            // capturePlayer = Manager.createPlayer("capture://audio");

            if (capturePlayer != null) {

                // if created, realize it
                capturePlayer.realize();
            }
        }
    }
}
```

```
// and grab the RecordControl
recordControl = (RecordControl)capturePlayer.getControl(
    "javax.microedition.media.control.RecordControl");

// set the alert as the current item
display.setCurrent(alert);

// if it is null throw exception
if(recordControl == null)
    throw new Exception("No RecordControl available");

// create the buffer in which recording will be done
bos = new ByteArrayOutputStream(1024);

// and set this buffer as the destination for recording
recordControl.setRecordStream(bos);

} else {
    throw new Exception("Capture Audio Player is not available");
}

} catch(Exception e) {
    error(e);
}
}

public void startApp() {

    try {

        // first start the corresponding player
        capturePlayer.start();

        // and then start the RecordControl
        recordControl.startRecord();

        // now wait 10 seconds
        Thread.sleep(10000);

        // stop recording after time is up
        recordControl.stopRecord();

        // commit the recording
        recordControl.commit();

        // and close the Player instance
        capturePlayer.close();
    }
}
```

```
// finished, set the message
alert.setString("Well done! Now Processing...");

// flush the buffer
bos.flush();

// create an inputstream of this buffer
bis = new ByteArrayInputStream(bos.toByteArray());

// create the playback Player instance with this stream,
// using the specified content type, as given by the RecordControl
// playbackPlayer =
    Manager.createPlayer(bis, recordControl.getContentType());

// start the playback
playbackPlayer.start();

// and set the message
alert.setString("Playing back ... ");

} catch(Exception e) {
    error(e);
} finally {
    try {
        if(bos != null) bos.close();
        if(bis != null) bis.close();
    } catch(Exception ex) {
        error(ex);
    }
}

}

public void pauseApp() {
}

public void destroyApp(boolean unconditional) {

}

public void commandAction(Command cmd, Displayable disp) {
    if(cmd == exitCommand) {
        notifyDestroyed();
    }
}

// general purpose error method, displays onscreen as well to output
private void error(Exception e) {
    alert.setString(e.getMessage());
}
```



```

        alert.setTitle("Error");
        display.setCurrent(alert);
        e.printStackTrace();
    }
}

```

After a `Player` instance is created and realized for capturing audio, the `RecordControl` control is extracted. The `setRecordStream(OutputStream os)` method is used to set a `ByteArrayOutputStream` with an initial buffer size of 1,024 bytes. When the MIDlet is started, recording is started by using the `startRecord()` method of `RecordControl`. You first have to start the underlying `Player` instance by using the `start()` method; otherwise, no recording will actually take place. This is because the `Player` instance is created on the audio microphone on the device, which then releases a `RecordControl` for you to use. If you call `startRecord()` first, then the `RecordControl` will be ready to record, but won't actually record anything till the corresponding `Player` instance is started. Thus, it's best to first start the `Player` instance, and then start the recording by calling the `startRecord()` method.

The recording is done for 10 seconds by making the main application thread sleep. After the 10 seconds are over, the recorded data is put into the `ByteArrayInputStream` after committing the recorded data by calling the `commit()` method and closing the `Player` instance. Note that calling `stopRecord()` is not necessary, as `commit()` calls it internally. When `stopRecord()` is called, the `Player` instance doesn't actually stop, but continues in the `STARTED` state until it is stopped or closed.

The data is now available in the `ByteArrayInputStream` and a new `Player` instance is created to use this as the `InputStream` for playback. The `getContentType()` method of `RecordControl` is used to specify the content type for this new instance. It's now a simple matter of calling the `start()` method on this instance to play back the captured audio data.

Controlled Capture and Playback

Although timed capture as seen in the previous section shows you the basics of capturing audio, it doesn't show you how to provide controls to better manage the recording time. In this section, you'll add some commands to a modified recording MIDlet created in the previous section, giving you these controls. Listing 8-6 shows the code for this MIDlet, with an explanation following the listing.

Listing 8-6. Controlling Audio Capture

```

package com.apress.chapter8;

import javax.microedition.midlet.*;
import javax.microedition.lcdui.*;
import javax.microedition.media.*;
import java.io.ByteArrayOutputStream;
import java.io.ByteArrayInputStream;
import javax.microedition.media.control.RecordControl;

public class ControlledAudioCaptureMIDlet extends MIDlet
    implements CommandListener, PlayerListener {

```

```
// the display items
private Display display = null;
private Alert alert = null;
private Command exitCommand = null;
private Command startCommand = null;
private Command pauseCommand = null;
private Command doneCommand = null;
private Command playbackCommand = null;

// players and controls
private Player capturePlayer = null;
private Player playbackPlayer = null;
private RecordControl recordControl = null;

// buffers
private ByteArrayOutputStream bos = new ByteArrayOutputStream();
private ByteArrayInputStream bis = null;

// Boolean flag to indicate when recording is being done
private boolean recording = false;

public ControlledAudioCaptureMIDlet() {

    // create the display
    display = Display.getDisplay(this);
    alert = new Alert("Message");
    alert.setTimeout(Alert.FOREVER);
    alert.setString("Press Start Recording to capture audio");

    // create the various commands
    exitCommand = new Command("Exit", Command.EXIT, 1);
    startCommand = new Command("Start", Command.SCREEN, 1);
    pauseCommand = new Command("Pause", Command.SCREEN, 1);
    doneCommand = new Command("Done", Command.SCREEN, 1);
    playbackCommand =
        new Command("Playback", Command.SCREEN, 1);

    // and initialize the commands with the alert
    alert.addCommand(exitCommand);
    alert.addCommand(startCommand);

    // set this class as the PlayerListener for command actions
    alert.setCommandListener(this);

    // now set the alert as the current item
    display.setCurrent(alert);
}
```

```
try {

    // create the capture player
    capturePlayer = Manager.createPlayer("capture://audio");

    if (capturePlayer != null) {

        // if created, realize it
        capturePlayer.realize();

        // and grab the RecordControl
        recordControl = (RecordControl)capturePlayer.getControl(
            "javax.microedition.media.control.RecordControl");

        // if RecordControl is null throw exception
        if(recordControl == null)
            throw new Exception("No RecordControl available");

        // create the buffer in which recording will be done
        bos = new ByteArrayOutputStream(1024);

    } else {
        throw new Exception("Capture Audio Player is not available");
    }
} catch(Exception e) {
    error(e);
}

}

public void startApp() {
    display.setCurrent(alert);
}

public void pauseApp() {
}

public void destroyApp(boolean unconditional) {

    // close any open player instances, underlying controls will be
    // closed by calling the close method
    if(capturePlayer != null) {
        capturePlayer.close(); // releases the microphone
        capturePlayer = null;
    }
    if(playbackPlayer != null) {
        playbackPlayer.close();
        playbackPlayer = null;
    }
}
```



```
public void commandAction(Command cmd, Displayable disp) {

    // if exit ..
    if(cmd == exitCommand) {
        destroyApp(true);
        notifyDestroyed();
    }

    // now based on what command is called, take the right action
    try {

        // if starting or restarting recording
        if(cmd == startCommand) {

            // remove other commands
            alert.removeCommand(startCommand);
            alert.removeCommand(playbackCommand);

            // add pause and done commands
            alert.addCommand(pauseCommand);
            alert.addCommand(doneCommand);

            // now, if a playback was being done, close it to preserve
            // system resources
            if(playbackPlayer != null) {
                playbackPlayer.close();
                playbackPlayer = null;
            }

            // are we restarting an existing recording or a new one?
            if(!recording) { // this means a new one

                // set the ByteArrayInputStream to null
                bis = null;

                // initialize the ByteArrayOutputStream
                bos = new ByteArrayOutputStream(1024);

                // set the output of recording
                recordControl.setRecordStream(bos);

                // and start the underlying player
                capturePlayer.start();
            }

            // now start the recording
            recordControl.startRecord();
        }
    }
}
```

```
// set the flag
recording = true;

// and show the message
alert.setString("Recording now. Say something nice" +
    " and then press Pause or Done Recording");

} else if(cmd == pauseCommand) {

    // pausing an existing recording

    // so remove the pause command and add the start (or restart command)
    alert.removeCommand(pauseCommand);
    alert.addCommand(startCommand);

    // stop the control, this only pauses the recording
    recordControl.stopRecord();

    // and show message
    alert.setString("Recording paused. " +
        " Press Start Recording to restart");

} else if(cmd == doneCommand) {

    // done recording, so remove commands
    alert.removeCommand(doneCommand);
    alert.removeCommand(pauseCommand);

    // add command to play back or start a new recording
    alert.addCommand(startCommand);
    alert.addCommand(playbackCommand);

    // complete the recording
    completeRecording();

    // show message
    alert.setString("Press Start Recording to capture new audio or " +
        " Playback Recording to playback recorded audio");

} else if(cmd == playbackCommand) {

    // remove the start recording command
    alert.removeCommand(startCommand);

    // start the playback
    playbackPlayer.start();
}
```

```

        // and set the message
        alert.setString("Playing back recorded audio");
    }
} catch(Exception e) {
    error(e);
}
}

private void completeRecording() throws Exception {

    // flush the output buffer
    bos.flush();

    // commit the recording
    recordControl.commit();

    // create the input buffer from the output buffer
    bis = new ByteArrayInputStream(bos.toByteArray());

    // create the playback player
    playbackPlayer =
        Manager.createPlayer(bis, recordControl.getContentType());

    // add a listener on it
    playbackPlayer.addPlayerListener(this);

    // and initialize the recording flag
    recording = false;
}

public void playerUpdate(Player player, String event, Object data) {

    // only listening on the playback player
    if(event.equals(PlayerListener.END_OF_MEDIA)) {

        // add the commands back
        alert.addCommand(startCommand);
        alert.addCommand(playbackCommand);
    }
}

// general purpose error method, displays onscreen as well to output
private void error(Exception e) {
    alert.setString(e.getMessage());
    alert.setTitle("Error");
    display.setCurrent(alert);
}

```



```

        e.printStackTrace();
    }
}

```

Although the listing is long, it shows you how to control the recording using menu commands. Four commands are defined, `startCommand`, `pauseCommand`, `doneCommand`, and `playbackCommand`. The first three control the recording, and the last controls the playback of the recorded data. If you press the `pauseCommand`, it stops the recording for the moment, and when `startCommand` is pressed again, the recording starts from the point that you left off.

The main action takes place in the `commandAction()` method, where the four commands are handled. When the `startCommand` is handled, the recording is checked to see whether it's new or previously paused using the recording flag. For new recordings, new buffers are created, the location of the recording data is reinitialized, and the underlying recording `Player` instance is started. For previously paused recordings, all this is ignored, and only `startRecord()` method is called, which takes off from the previously paused recording location.

When the `pauseCommand` is called, the `stopRecord()` method of `RecordControl` is called, which, as you may realize now, only pauses the recording of the media data, while the underlying `Player` instance is still in the `STARTED` state.

The rest of the commands you should be familiar with, as they mimic the work you did in the previous section. The only other noteworthy code is in the `playerUpdate()` method, where a `Player` instance adds `startCommand` and `playbackCommand` back to the displayed alert, when the `END_OF_MEDIA` event is received.

Figure 8-7 shows the MIDlet in action on the Motorola C975 device.



Figure 8-7. *Controlled audio recording MIDlet in action on the Motorola C975*

As you can see, when you press Start, the user must give permission for the recording to be done. Make sure that you select the Yes, ask once option; otherwise, the MIDlet gives an exception if you do multiple recordings (if you select Yes, always ask). The permission is not requested when either the `capturePlayer` or `recordControl` instances are created or initialized, but it is requested when the output stream is set using the `setRecordStream()` method.

Note At this point, the Sun's emulator throws a deadlock issue. Because the `setRecordStream()` method may take a long time to return, it advises you to run this part of the code in a separate thread. This is only an issue on the Sun emulator, however, and most devices don't require separate threads. Creating new threads for simple tasks like this can be counterproductive on small memory footprint devices.

In the next section, you'll learn how to save the recorded data in a particular location, for playback at a later time, and not just in the present MIDlet session.

Saving Captured Audio

Captured audio can be saved to a couple of locations, depending upon the capabilities of your device. The easiest place to save the captured audio is the file system on the device itself, so that you can switch the device (or the MIDlet) off and still come back later and retrieve the recording from this persistent storage.

You can also save the data to another device (most likely a computer) using the serial port. This can be achieved by using the `CommConnection` interface defined in the `javax.microedition.io` package. This interface gives you an `OutputStream` (with the `openOutputStream()` method) to which you can direct the recorded data bytes using the `setRecordStream()` method. Of course, this means that on the other side, the receiving device must have a listener on this serial port that can receive these data bytes and store them for later use. The two devices must also be connected at all times via this port, for data to be stored and later retrieved as well. As you can see, saving this data to another device via the serial port throws several issues and is not the best option.

You can also store the data on the Internet using HTTP. Because the basics remain the same for storing audio, image, or video data, this type of storage is covered in the next chapter. This section shows you how to store the data on the device itself using the `FileConnection` API (JSR-75).

Note Strictly speaking, you don't need the `FileConnection` API for this to work, as you are not going to use any of the `FileConnection` API classes. However, depending on your implementation, you may or may not need to have this API in your CLASSPATH and available on your device. Further, access to the local file system requires permissions from the user that are similar to network access and audio/video/image capture, so you may end up requesting two sets of permissions when you run this MIDlet, one to access the file system, and one to capture audio.

Listing 8-7 shows how to store captured audio on the device's file system and how to retrieve it for playback. Although very similar to Listing 8-5, the difference is in the way the location of the final captured audio is specified.

Tip Listing 8-7 stores captured audio in the root folder of the device. The root folder can be found by using the `listRoots()` method of the class `FileSystemRegistry` from the `FileConnection` API. As stated before, however, you don't need this API in the CLASSPATH to access the file system for Listing 8-7, but you'll need it to find the root folder (unless you can get that information from the documentation for the device).

Listing 8-7. Storing Captured Audio

```
package com.apress.chapter8;

import javax.microedition.midlet.*;
import javax.microedition.lcdui.*;
import javax.microedition.media.*;
import javax.microedition.media.control.RecordControl;

public class SaveCapturedAudioMIDlet extends MIDlet
    implements CommandListener {

    // the display items
    private Display display = null;
    private Alert alert = null;
    private Command exitCommand = null;

    // players and controls
    private Player capturePlayer = null;
    private Player playbackPlayer = null;
    private RecordControl rControl = null;

    private boolean error = false;

    public SaveCapturedAudioMIDlet() {

        // create the display
        display = Display.getDisplay(this);
        alert = new Alert("Message");
        alert.setTimeout(Alert.FOREVER);
        alert.setString("Capturing for 10 seconds. Say something intelligent!");
        exitCommand = new Command("Exit", Command.EXIT, 1);
        alert.addCommand(exitCommand);
        alert.setCommandListener(this);

        try {

            // create the capture player
            capturePlayer = Manager.createPlayer("capture://audio");

            if (capturePlayer != null) {

                // if created, realize it
                capturePlayer.realize();

                // and grab the RecordControl
                rControl = (RecordControl)capturePlayer.getControl(
                    "javax.microedition.media.control.RecordControl");
            }
        }
    }
}
```



```
// set the alert as the current item
display.setCurrent(alert);

// if it is null throw exception
if(rControl == null) throw new Exception("No RecordControl available");

// and set the destination for this captured data
// check your device documentation to find out the root.
// The following will work on devices that have the root
// specified as shown
rControl.setRecordLocation("file:///test.wav");

} else {
    throw new Exception("Capture Audio Player is not available");
}

} catch(Exception e) {
    error(e);
}
}

public void startApp() {

    if(error) return;

    try {

        // first start the corresponding recording player
        capturePlayer.start();

        // and then start the RecordControl
        rControl.startRecord();

        // now record for 10 seconds
        Thread.sleep(10000);

        // stop recording after time is up
        rControl.stopRecord();

        // commit the recording
        rControl.commit();

        // stop the Player instance
        capturePlayer.stop();

        // and close it to release the microphone
        capturePlayer.close();
    }
}
```

```

    // finally, create a Player instance to playback
    playbackPlayer = Manager.createPlayer("file:///test.wav");

    // and start it
    playbackPlayer.start();

    } catch(Exception e) {
        error(e);
    }
}

public void pauseApp() {
}

public void destroyApp(boolean unconditional) {
    if(capturePlayer != null) capturePlayer.close();
    if(playbackPlayer != null) playbackPlayer.close();
}

public void commandAction(Command cmd, Displayable disp) {
    if(cmd == exitCommand) {
        destroyApp(true);
        notifyDestroyed();
    }
}

// general purpose error method, displays onscreen as well to output
private void error(Exception e) {
    alert.setString(e.getMessage());
    alert.setTitle("Error");
    display.setCurrent(alert);
    e.printStackTrace();
    error = true;
}
}

```

The major changes are highlighted in bold. The code sets the location of the captured audio to a file called `test.wav` on the root folder of the underlying device file system. You'll get an error if this access is not supported. You'll also get an error if the file already exists, as you can see by running the listing twice (without changing the name of the file, see Figure 8-8). The new flag `error` doesn't run the `startApp()` method if there is a problem with either file system access or audio capture.

The location is set using the `setRecordLocation(String locator)` method. This listing runs perfectly on the BenQ M75 but fails on the Motorola C975 because it doesn't support file system access. However, note that the listing saves the file as a WAV file. If you refer to Table 8-2, you'll see that the only supported encoding for audio capture on the BenQ M75 is `audio/amr`. This seems like an anomaly, but is perfectly acceptable because the MMAPI specification allows implementations to change the format of recorded data. When you set the record location

with an extension of WAV, the format conversion is done by the implementation. You can save the data as `test.amr` as well (at least on the M75), without needing to do any format changes.

Figure 8-8 shows this MIDlet running on the M75.



Figure 8-8. Storing captured audio on BenQ M75

Capturing Audio from Existing Audio

Until now, you saw how audio is captured using the audio microphone on a device, by creating a `Player` instance using the special locator: `capture://audio`. This is fairly standard practice. The beauty of MMAPI is that you can use any `Player` instance to capture media data from, provided the instance gives you a `RecordControl` instance to work with. This is a great flexibility provided by MMAPI and allows you to, for example, create MIDlets that can read and record data from an existing format and convert to another. Another example may be for a MIDlet to capture media stored on the network and store it locally (with or without the change in formats).

Unfortunately, neither of the two actual devices supports provisioning `RecordControl` for existing audio data, and you'll have to use Sun's `DefaultColorPhone` emulator to test this in action. This is a simple matter of replacing

```
capturePlayer = Manager.createPlayer("capture://audio");
```

with

```
(capturePlayer = Manager.createPlayer("http://www.somesite.com/media/file.amr"));
```

or

```
capturePlayer = Manager.createPlayer("file:///root1/file.wav");
```

or

```
capturePlayer =  
Manager.createPlayer(getClass().getResourceAsStream("/test.amr"), "audio/amr");
```

or something similar, in any of the listings so far, and you can test the capture of existing media.

Working with Video

A lot of the techniques discussed in the previous sections on audio apply to video as well because of the way the MMAPi is defined. The interfaces remain the same; what you do with the available data based on its type is the only thing that changes. For example, the methods and procedures defined in the previous sections on capturing audio data can be applied to video as well using the same `RecordControl` interface.

The major difference, of course, lies in the display of video. One special control, `VideoControl`, is used for this purpose, and it's augmented by the precise control provided by the `FramePositioningControl` control. `VideoControl` extends `GUIControl`, which is a generic control provided in case MMAPi implementations wanted to provide other methods of controlling and displaying GUI-based media data.

Displaying Video

`VideoControl`, which is the primary control for displaying video, is used to control how the video looks when displayed in a MIDlet, including its positioning and screen focus. As you might expect, the controls for playback, pause, rewind, and forward are provided by the underlying `Player` instance methods, and are therefore, generic.

The video formats you can display depend on your MMAPi implementation. Most implementations support MPEG-4, but an increasing number support 3GPP as well. Some may support proprietary formats. As you know, a full list of supported formats can be queried for by using the `getSupportedContentTypes(null)` method of the `Manager` class, which returns not only the supported formats for video, but the supported formats for all media types. With our target devices, the BenQ M75 supports only the 3GPP and MP4 video formats, whereas the Motorola C975 supports several formats, as you might recall from Chapter 2, Table 2-3, including 3GPP, MP4, and RealVideo.

Note MPEG-4 and MP4 mean the same thing. Similarly, `video/mpeg4` and `video/mp4` also define the same content type, however, different implementations may or may not accept one content type over another, so you have to test your videos to make sure the implementation accepts the content type. The same applies to `video/3gpp` and `video/3gp` content types.

`VideoControl` provides several methods to control the display of your video. Most of these methods provide control over the positioning of the video, but the main method that initializes the display is the one inherited from `GUIControl`. This method, `initDisplayMode(int mode, Object arg)`, provides the basis on which the video is displayed on the device screen. This method must be called only once for each video display (otherwise an `IllegalStateException` is thrown). Essentially, this method tells the implementation how you plan to display your video: as an embedded item in a `Form` or an independent display in a `Canvas`.

With MIDlet development, this is a powerful choice, and you are given the option to display your video in either a high-level, consistent environment (`Form`), or a low-level, precise display (`Canvas`). When added to a `Form`, the video is just another item in the display, whereas in a `Canvas`, you can work with the video and have more control over its positioning and display, including access to the `Graphics` object.

This choice is expressed using the `mode` argument. There are two valid constant values defined in the current specification for this argument: `USE_GUI_PRIMITIVE` and `USE_DIRECT_VIDEO`. The former is defined in the `GUIControl` interface, and you use this value when you want to embed your video in a `Form`. The latter is defined in the `VideoControl` interface, and you use it when you want to embed video in a `Canvas`. Because `VideoControl` extends `GUIControl`, it also gets to use the `USE_GUI_PRIMITIVE` mode. By defining `USE_GUI_PRIMITIVE` in the `GUIControl` interface, the option is left open for other GUI-based controls to use this mode.

The name `USE_GUI_PRIMITIVE` suggests that the video must be displayed on a primitive GUI. This is true, and the actual GUI component on which the video will be displayed is returned by the `initDisplayMode()` method. For Liquid Crystal Display User Interface (LCDUI), it returns an `Item` object, which can be attached to a `Form` instance using the `append()` method. For other environments (for example, CDC, which supports the Abstract Windows Toolkit), it returns a `java.awt.Component` object. When the mode is `USE_DIRECT_VIDEO`, the method returns `null`, because the object on which the video must be displayed is specified by the second parameter to the `initDisplayMode()` method, and it must be of the `Canvas` type (or a subclass). For `USE_GUI_PRIMITIVE` mode, this second parameter can either be `null` or the fully qualified class name of a GUI primitive (such as `java.awt.component` if available).

Listing 8-8 creates a `MIDlet` that allows you to display video on either a `Canvas` or a `Form`.

Listing 8-8. *Display Video in a Form or a Canvas*

```
package com.apress.chapter8;

import javax.microedition.midlet.*;
import javax.microedition.lcdui.*;
import javax.microedition.media.*;
import javax.microedition.media.control.*;

public class DisplayVideoMIDlet extends MIDlet implements CommandListener {

    // the list to show the choice - form or canvas
    private List list = null;

    // the canvas to display the video on
    private Canvas canvas = null;

    // the form to add the video to
    private Form form = null;

    // a string item to add to form
    private StringItem descriptionItem = null;

    // the video player
    Player player = null;

    // commands
    private Command backCommand = null;
    private Command exitCommand = null;
```

```
// alert to show messages on
private Alert alert = null;

// and the display
private Display display = null;

// a flag to indicate error
private boolean error = false;

public DisplayVideoMIDlet() {

    // create the visual elements
    display = Display.getDisplay(this);
    exitCommand = new Command("Exit", Command.EXIT, 1);
    backCommand = new Command("Back", Command.ITEM, 1);

    // VideoCanvas is a non public class in this file
    canvas = new VideoCanvas();
    canvas.addCommand(exitCommand);
    canvas.addCommand(backCommand);
    canvas.setCommandListener(this);

    // create the form and add items and commands to it
    form = new Form("Video Form", null);
    descriptionItem = new StringItem("Desc: ", "Sydney Harbour - Bad audio");
    form.append(descriptionItem);
    form.addCommand(exitCommand);
    form.addCommand(backCommand);
    form.setCommandListener(this);

    // create the list
    list = new List("Pick One", List.IMPLICIT);
    list.append("Play Video on Form", null);
    list.append("Play Video on Canvas", null);
    list.addCommand(exitCommand);
    list.setCommandListener(this);

    // and an alert for errors
    alert = new Alert("Error");
}

public void startApp() {
    if(error) return;
    display.setCurrent(list); // show the list if no errors
}

public void pauseApp() {
}
```



```

public void destroyApp(boolean unconditional) {
    // close the player instance
    try {
        if(player != null) player.close();
    } catch(Exception e) {
        error(e);
    }
}

public void commandAction(Command cmd, Displayable disp) {

    // if exit
    if(cmd == exitCommand) {
        destroyApp(true);
        notifyDestroyed();
    } else if(cmd == backCommand) { // if the user clicks back

        // close the player instance
        try {
            if(player != null) player.close();
        } catch(Exception e) {
            error(e);
        }

        // display the list
        display.setCurrent(list);

        // and return
        return;
    }

    // implicit list handling
    try {

        // first load the Player instance
        loadPlayer();

        if(list.getSelectedIndex() == 0) { // form video

            // extract the GUIControl
            GUIControl guiControl = (GUIControl)player.getControl(
                "javax.microedition.media.control.GUIControl");

            // if not found, throw error
            if(guiControl == null) throw new Exception("No GUIControl!!");
        }
    }
}

```

```
// add as a video item by initializing it to use GUI Primitive
Item videoItem =
    (Item)guiControl.initDisplayMode(
        GUIControl.USE_GUI_PRIMITIVE, null);

// insert at first place
form.insert(0, videoItem);

// show the form
display.setCurrent(form);

// finally start the player instance
player.start();
} else { // canvas video

    // grab the videocontrol
    VideoControl videoControl = (VideoControl)player.getControl(
        "javax.microedition.media.control.VideoControl");

    // if not found throw error
    if(videoControl == null) throw new Exception("No VideoControl!!");

    // initialize to use direct video and show on canvas
    videoControl.initDisplayMode(VideoControl.USE_DIRECT_VIDEO, canvas);

    // make sure it is displayed full screen
    // not all devices support this, if your device is having trouble
    // showing the video, comment this line
    videoControl.setDisplayFullScreen(true);

    // must make the control visible
    videoControl.setVisible(true);

    // now show the canvas
    display.setCurrent(canvas);

    // and start the player
    player.start();
}
} catch(Exception e) {
    error(e);
}
}

private void loadPlayer() throws Exception {
```

```

    // loads the Player on this MP4 file.
    // IMPORTANT: Change content type here for C975 to video/mp4
    // and M75 to video/mpeg4 or use Netbeans device fragmentation
    // feature
    player = Manager.createPlayer(
        getClass().getResourceAsStream(
            "/media/video/chapter8/sydneyharbour.mp4"), "video/mpeg4");

    player.realize();
}

// general purpose error method, displays onscreen as well to output
private void error(Exception e) {
    alert.setString(e.getMessage());
    alert.setTimeout(Alert.FOREVER);
    display.setCurrent(alert);
    e.printStackTrace();
    error = true;
}
}

// VideoCanvas that is the container for the video
class VideoCanvas extends Canvas {
    public void paint(Graphics g) {
        // does nothing.
    }
}
}

```

Tip If you have trouble running this video, comment out the line that sets the video to full screen mode. Many devices don't support full screen mode and throw a `MediaException`.

When the MIDlet is run, it gives you two choices: either run your video in a `Form` or run it in a `Canvas`. The user's choice is handled in the `commandAction()` method, which realizes a `Player` instance with the said video by calling the `loadVideo()` method. This is done each time the choice is made, because once initialized with the display mode, the same `Player` instance can't be reinitialized with the `initDisplayMode()` method. This is also the reason why each `Player` instance is closed when the user presses the Back button.

You'll notice that for the `Form` video, the control extracted from the `Player` instance is of the type `GUIControl`. Although correct, this is not necessary. Instead, you should extract `VideoControl` each time a video `Player` instance is created. Recall that `VideoControl` extends `GUIControl`, so if you wanted to add your video to a `Form` instance, you can still initialize it by using the `initDisplayMode()` method and passing it the inherited constant `USE_GUI_PRIMITIVE`. Further, by using `VideoControl`, you get access to the positioning methods of this control as well (although how useable they may be considering that the video is embedded in a `Form` object is another matter).

Finally, note that when displayed in a Canvas, the `setVisible(true)` method of the `VideoControl` must be called for the video to be displayed. By calling the same method with a value of `false`, you can make the video disappear.

Figure 8-9 shows this MIDlet running in the Motorola C975 device.



Figure 8-9. Video playback on a canvas on the Motorola C975

Positioning Video and Controlling Volume

When you're playing back video, you not only get access to the `VideoControl`, but because there is likely to be an audio component in the video as well, you also get access to all the controls that are accessible to sampled audio media data. Thus, you can easily set the volume or change the pitch of the accompanying audio, provided these controls are exposed.

Changing the volume or the pitch is one thing, and positioning the video is another. To position your video in a `Canvas`, you need to use the positioning methods provided by `VideoControl`. These methods, `setDisplayLocation(int x, int y)`, `setDisplaySize(int width, int height)`, and `setDisplayFullScreen(boolean fullScreenMode)`, are only applicable when using direct video on a `Canvas` (with the `USE_DIRECT_VIDEO` mode). On a `Form`, you are restricted by the amount of screen space that the underlying implementation allocates to `Form` items, and these methods usually return without doing anything.

You can query the size and position of your video by using the size and positioning methods, such as `getDisplayHeight()`, `getDisplayWidth()`, `getDisplayX()`, and `getDisplayY()`. If you change the position and size of your video to fit in any way on your canvas, you can use the `getSourceWidth()` and `getSourceHeight()` methods to find out the actual width and height of your video.

Note that all the size and positioning methods work relative to the component on which the video is displayed, such as a `Canvas`, and *not* relative to the device screen.

Listing 8-9 shows the code for a MIDlet that allows you to move your video in the vertical space after displaying it in the center of the display screen. It also allows you to mute the volume by using the exposed `VolumeControl`.

Listing 8-9. Moving Video in Vertical Space and Muting Volume

```
package com.apress.chapter8;

import javax.microedition.midlet.*;
import javax.microedition.lcdui.*;
import javax.microedition.media.*;
import javax.microedition.lcdui.game.GameCanvas;
```

```
import javax.microedition.media.control.VideoControl;
import javax.microedition.media.control.VolumeControl;

public class MoveableVideoMIDlet extends MIDlet implements CommandListener {

    // all the controls and containers
    private Player player = null;
    private VideoControl videoControl = null;
    private VolumeControl volControl = null;

    private MovableVideoCanvas canvas = null;
    private Command exitCommand = null;
    private Command stopAudioCommand = null;

    private Display display = null;
    private Alert alert = null;

    private boolean error = false;

    public MoveableVideoMIDlet() {

        // create the alerts, canvas and displays
        display = Display.getDisplay(this);

        alert = new Alert("Error");
        exitCommand = new Command("Exit", Command.EXIT, 1);
        alert.addCommand(exitCommand);
        alert.setCommandListener(this);

        // load the Player and then the Volume and VideoControl
        try {

            // change content type for different devices, mp4 for C975, mpeg4 for M75
            player = Manager.createPlayer(getClass().getResourceAsStream(
                "/media/video/chapter8/sydneyharbour.mp4"), "video/mp4");
            player.realize();

            // realize the two controls
            videoControl = (VideoControl)player.getControl(
                "javax.microedition.media.control.VideoControl");
            volControl = (VolumeControl)player.getControl(
                "javax.microedition.media.control.VolumeControl");
        } catch (Exception e) {
            error(e);
        }

        if(!error) {
```

```
// if no error, create the canvas and add commands to it
canvas = new MovableVideoCanvas();
canvas.setVideoControl(videoControl);
stopAudioCommand = new Command("Stop Audio", Command.SCREEN, 1);

canvas.addCommand(exitCommand);
canvas.addCommand(stopAudioCommand);
canvas.setCommandListener(this);

// initialize the VideoControl display
videoControl.initDisplayMode(VideoControl.USE_DIRECT_VIDEO, canvas);

// and position it in the center of the canvas
int halfCanvasWidth = canvas.getWidth()/2;
int halfCanvasHeight = canvas.getHeight()/2;

try {
    videoControl.setDisplayFullScreen(false);
    videoControl.setDisplaySize(halfCanvasWidth, halfCanvasHeight);
    videoControl.setDisplayLocation(halfCanvasWidth/2, halfCanvasHeight/2);
    videoControl.setVisible(true);
} catch (Exception e) {
    error(e);
}
}

public void startApp() {
    if(error) return;

    try {
        player.start();
    } catch (Exception e) {
        error(e);
    }
    display.setCurrent(canvas);
}

public void pauseApp() {
}

public void destroyApp(boolean unconditional) {
    try {
        if(player != null) player.close();
    } catch (Exception e) { error(e); }
}
```



```

    public void commandAction(Command cmd, Displayable disp) {
        if(cmd == exitCommand) {
            destroyApp(true);
            notifyDestroyed();
        } else if(cmd == stopAudioCommand) { // if stop audio, mute VolumeControl
            if(volControl != null) volControl.setMute(true);
        }
    }

    // general purpose error method, displays onscreen as well to output
    private void error(Exception e) {
        alert.setString(e.getMessage());
        alert.setTitle("Error");
        display.setCurrent(alert);
        e.printStackTrace();
        error = true;
    }
}

// MovableVideoCanvas that is the container for the video
class MovableVideoCanvas extends GameCanvas {

    // VideoControl that will be managed
    private VideoControl videoControl = null;

    // distance to move
    private int dx, dy = 2;

    public MovableVideoCanvas() {
        super(false); // do not suppress key events
    }

    void setVideoControl(VideoControl videoControl) {
        this.videoControl = videoControl;
    }

    public void paint(Graphics g) {
        // clear the screen first
        g.setColor(0xffffffff);
        g.fillRect(0, 0, getWidth(), getHeight());

        // and flush off screen buffer to actual screen
        flushGraphics();
    }

    public void keyPressed(int keyCode) {

```

```

// handles the user's interaction with the screen by capturing key press
int gameAction = getGameAction(keyCode);
int y = videoControl.getDisplayY();

// only move in vertical direction
if(gameAction == UP) {
    y -= dy;
} else if(gameAction == DOWN) {
    y += dy;
}

// set the new location of the video
videoControl.setDisplayLocation(videoControl.getDisplayX(), y);

// and repaint
repaint();
}
}

```

This listing uses a Canvas class that is extended from GameCanvas. This class has an offscreen buffer that may help minimize flicker and is better for displaying video in a Canvas than the generic Canvas class, especially when you are going to move the video around as is the case here. When the user presses the Up or Down keys, the VideoControl is positioned and the screen cleared and repainted to display the video in the new up or down location.

The stopAudioCommand is handled by using the exposed VolumeControl and setting it to mute using the setMute() method of this control.

Figure 8-10 shows the resultant video in the Motorola C975 device.



Figure 8-10. *Moving video around and muting audio*

Capturing Video and Images

Capturing video is not terribly different from capturing audio, as you would expect, because both use the same RecordControl control to achieve the result. However, with video, you can also take a snapshot of a video. This is where capturing video differs from capturing audio: Taking a snapshot doesn't require a RecordControl, but is accomplished using a method in VideoControl.

The `getSnapshot()` method in `VideoControl` allows you to take a snapshot of the image that is playing on the device screen. Of course, because the `getSnapshot()` method is a method of the `VideoControl` class, you can take an image of any video that is playing on a device screen, not just captured video. The method returns the image data as a byte array, which you can then manipulate in any way you want using the `LCDUI Image` class.

In this section, you'll apply the methods learned in the previous sections, including capturing media data using `RecordControl` and displaying video using `VideoControl`. However, as opposed to capturing audio, capturing and displaying video must be done simultaneously so that the user can see what is actually being recorded.

So, can you just hook into the camera, without actually recording anything, to first show the user the view through the video? Of course!

Looking Through the Viewfinder

As you may expect by now, the locator to hook into a device camera takes the form of `capture://video`. This gives you a `Player` instance that returns video in the default format. The Motorola C975 doesn't support video capture, but the default (and the only) format supported by the BenQ M75 device is `video/3gpp`.

Note As you'll see shortly, even though the Motorola C975 device doesn't support video capture, it allows you to look through the viewfinder of the onboard camera (possibly because it supports camera snapshots).

After you have a `Player` instance hooked into a video camera, it's a simple matter of extracting a `VideoControl` from it to look through its viewfinder and display this video to the user. Note that to look through a viewfinder, you need to use a `VideoControl` and not a `RecordControl`, because you are not recording anything (yet).

As before, you can use a `Canvas` to display the video through the viewfinder to the user. Because you are not going to move the video around, you can either use a `GameCanvas` or a normal `Canvas`.

Listing 8-10 shows the code for plugging into the device's viewfinder and displaying it on a canvas. At this point, this is all the MIDlet does, but you'll extend it in the next sections to take a snapshot and capture video.

Listing 8-10. Looking Through a Camera's Viewfinder and Displaying Onscreen

```
package com.apress.chapter8;

import javax.microedition.midlet.*;
import javax.microedition.lcdui.*;
import javax.microedition.media.*;
import javax.microedition.media.control.VideoControl;

public class CaptureVideoAndImageMIDlet extends MIDlet
    implements CommandListener {
```



```
// initialize the player and the canvas
private CaptureVideoCanvas canvas = null;
Player capturePlayer = null;

// and the other variables
private Alert alert = null;
private Command exitCommand = null;
Display display = null;
private boolean error = false;

public CaptureVideoAndImageMIDlet() {

    // create the display items
    alert = new Alert("Message");
    display = Display.getDisplay(this);
    exitCommand = new Command("Exit", Command.EXIT, 1);

    // create the video capture player
    try {
        capturePlayer = Manager.createPlayer("capture://video");
        capturePlayer.realize();

        // now create the canvas
        canvas = new CaptureVideoCanvas(this);
        canvas.addCommand(exitCommand);
        canvas.setCommandListener(this);
    } catch (Exception e) {
        error(e);
    }
}

public void startApp() {

    // if error, return
    if(error) return;

    // start the player
    try {
        capturePlayer.start();
    } catch (Exception e) { error(e); }

    // and set the canvas as the current item on display
    display.setCurrent(canvas);
}
```

⇒ Replace by a video resource on the Network.

```
public void pauseApp() {
    try {
        if(capturePlayer != null) capturePlayer.stop();
    } catch(Exception e) {}
}

public void destroyApp(boolean unconditional) {
    if(capturePlayer != null) capturePlayer.close();
}

public void commandAction(Command cmd, Displayable disp) {
    if(cmd == exitCommand) {
        destroyApp(true);
        notifyDestroyed();
    }
}

// general purpose error method, displays onscreen as well to output
void error(Exception e) {
    alert.setString(e.getMessage());
    alert.setTitle("Error");
    display.setCurrent(alert);
    e.printStackTrace();
    error = true;
}

// the canvas that holds the video
class CaptureVideoCanvas extends Canvas {

    // the base midlet
    CaptureVideoAndImageMIDlet midlet = null;

    // the video control
    private VideoControl videoControl = null;

    public CaptureVideoCanvas(CaptureVideoAndImageMIDlet midlet)
        throws Exception {

        this.midlet = midlet;

        // initialize the video control
        videoControl =
            (VideoControl)midlet.capturePlayer.getControl(
                "javax.microedition.media.control.VideoControl");
    }
}
```

```

// if not present, throw error
if(videoControl == null)
    throw new Exception("No Video Control for capturing!");

// init display mode to use direct video and this canvas
videoControl.initDisplayMode(VideoControl.USE_DIRECT_VIDEO, this);

try { // try and set to full screen
    videoControl.setDisplayFullScreen(true);
} catch(MediaException me) {
    // but some devices may not support full screen mode
    videoControl.setDisplayLocation(5, 5);
    try {
        videoControl.setDisplaySize(getWidth() - 10, getHeight() - 10);
    } catch(Exception e) {}
    repaint();
}

// and make the video control visible
videoControl.setVisible(true);
}

public void paint(Graphics g) {

    // clear background
    g.setColor(0xffffffff);
    g.fillRect(0, 0, getWidth(), getHeight());

    // and draw a rectangle with a different color
    g.setColor(0x44ff66);
    g.drawRect(2, 2, getWidth() - 4, getHeight() - 4);
}
}

```

When the `CaptureVideoCanvas` is created, it uses the MIDlet's `capturePlayer` to extract the `VideoControl`. `CaptureVideoCanvas` then initializes this control and tries to set the control to display full screen. If that fails, a display is created that is bounded by a rectangle through the `paint()` method. As you can see, the listing doesn't require `RecordControl` to plug in to the camera's viewfinder and just uses the `VideoControl` control exposed by the camera `Player` instance.

If you run this listing in the Sun's `DefaultColorPhone` emulator, you'll get a simulated video capture as can be seen in Figure 8-11.

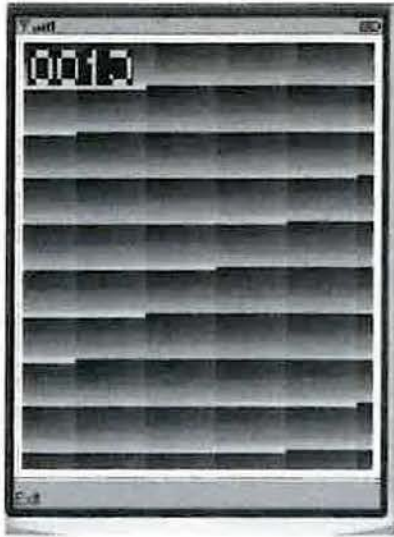


Figure 8-11. *Simulated video capture on Sun's DefaultColorPhone emulator*

Of course, the actual devices don't give simulated but actual views, as can be seen in Figure 8-12. Also note the difference in Figures 8-11 and 8-12 with regard to the screen size. The emulator doesn't support full-screen display (through the `setDisplayFullScreen()` method) whereas the devices do.

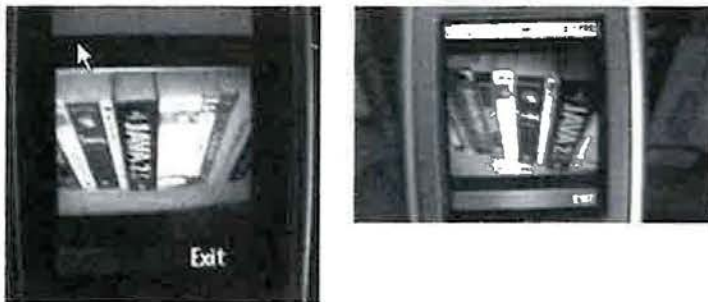


Figure 8-12. *Looking through the viewfinder in BenQ M75 and Motorola C975 devices*

Taking Snapshots

Taking a snapshot is now easy, given that you only need to use the `getSnapshot(String imageFormat)` method of the `VideoControl` control. The format of the desired image can be specified using the encoding strings that your device supports, but if you just want the default format, then pass a `null` value. Both the Motorola C975 and BenQ M75 devices support `jpeg` (or `image/jpeg`), and this is the only option supplied.

Let's now modify Listing 8-10 and add code that will take a snapshot when the user presses the Action key (also called the Fire key). To accomplish this, the listing needs to add the `keyPressed(int keyCode)` method to the `CaptureVideoCanvas` class. This method is shown here:

```

public void keyPressed(int keyCode) {

    // see what game action key the user has pressed
    int key = getGameAction(keyCode);

    // if fire, take a snapshot
    if(key == FIRE) {
        try {
            // use the control to take the picture, using the default encoding
            byte[] imageArray = vControl.getSnapshot(null);

            // create an image using the LCDUI Image class
            Image image = Image.createImage(imageArray, 0, imageArray.length);

            // make this image a part of an Alert
            Alert imageAlert =
                new Alert("Snapshot", "", image, AlertType.INFO);

            // show this alert for 5 seconds
            imageAlert.setTimeout(5000);

            // and show this alert
            midlet.display.setCurrent(imageAlert);

        } catch(Exception e) {
            midlet.error(e);
        }
    }
}

```

After taking the byte array that the `getSnapshot()` method creates, this method creates an image using the `createImage()` method of the `Image` class (from `LCDUI`). After this, it really depends on what you want to do with this image. You can save it to a local file system as you saw in the saving audio section, send it to a remote server via HTTP, or as I've done here, simply attach it to an `Alert` object and show the user the captured image for five seconds.

Note that when the device executes the `getSnapshot()` method, it requires permission from the user for taking the image. This permission is `javax.microedition.media.control.VideoControl.getSnapshot` and can be requested in the MIDlet's JAD file, as you saw in Chapter 5.

Capturing Video Clips

Video clips are captured by acquiring a `RecordControl` on the camera `Player` instance, and then following the principles discussed in the "Capturing Audio" section. Of course, after the video is captured, you may need to display it to the user, which requires either a video `Canvas` or a `Form`, the same concepts discussed in displaying video. The following code snippet is added to Listing 8-10 and allows the user to start and stop recording clips by pressing the Up and Down keys on a device. Displaying the clip to the user is left as an exercise for you.

Note The listing adds some new variables that are not in the original listing. The source code contains the full code in the Downloads section of the Apress Web site at <http://www.apress.com>.

```
} else if(key == UP) {

    // start recording
    try {

        // grab a record control
        rControl = (RecordControl)midlet.capturePlayer.getControl(
            "javax.microedition.media.control.RecordControl");

        // if not found, throw exception
        if(rControl == null) throw new Exception("No RecordControl found!");

        // create a ByteArrayOutputStream to store this recorded data in
        bos = new ByteArrayOutputStream();

        // set up the stream
        rControl.setRecordStream(bos);

        // and start recording - no need to start the underlying player
        // as it is already started
        rControl.startRecord();

        // set flag
        recording = true;
    } catch(Exception e) {
        midlet.error(e);
    }
} else if(key == DOWN) {

    try {
        rControl.stopRecord();
        rControl.commit();

        // do what is required with the byte array now, save it, display to user
        // or discard

        // reset the recording flag
        recording = false;
    } catch(Exception e) {
        midlet.error(e);
    }
}
```


This code snippet is added to the `keyPressed()` method of the `CaptureVideoCanvas`, along with the FIRE key event discussed in the previous section, to capture snapshots.

Seeking Video Frames with `FramePositioningControl`

Recall from Chapter 3 that you can fast forward or rewind through a `Player` instance by using the `setMediaTime()` method. With video media data, there is another way to go forward or back and that is by using the `FramePositioningControl` control, which allows you to seek individual frames within this data. Both methods of seeking data inherently do the same thing, that is, move the media time.

The `FramePositioningControl` control provides a simple way to seek frames by using the method `seek(int frameNumber)`. This method doesn't throw any exceptions, which may be surprising considering that you could pass it any arbitrary value. However, if you pass it a negative value, the video stops at the first frame (the 0th frame); if you give it a value larger than the number of frames in the video, it stops at the last frame. Of course, if the video stops playing because it has reached the last frame, the `Player` state transitions from `STARTED` to `STOPPED`, and the right event is broadcast to registered listeners.

When the frame seek operation is done, you can query the current media time of the video by using the `getMediaTime()` method of the `Player` instance, which is updated by the `seek()` method to reflect time at the new frame. You can skip frames using the `skip(int framesToSkip)` method, which works similar to the `seek()` method. The difference is that if `skip()` is called on a `Player` instance that is in the `STARTED` state, then the number of frames that will be skipped cannot be known to an exact degree because a `STARTED` `Player` instance is in the process of changing frames when the method is called.

This control also provides methods to convert media time to frame numbers and vice versa. This is useful when you don't actually want to transition to a new frame, but just want to calculate the media time between different frames. You can use the methods `mapTimeToFrame(long mediaTime)` and `mapFrameToTime(int frameNumber)` as required. Both these methods will return `-1` if mapping is unsuccessful and use microseconds (not milliseconds) as the unit of time measurement.

Streaming Media

Most of you are familiar with streaming media over the Internet. When you play video or audio from a favorite multimedia site, you are streaming media, which in many cases is based on HTTP. Streaming media occurs when the media data isn't downloaded on the host computer, but only sections of it are, leading to on-demand and live broadcast. Streaming media via HTTP is inefficient and doesn't allow seeking operations because it's based on TCP. Most professional streaming media solutions rely on the Real Time Transport Protocol (RTSP), which is User Datagram Protocol (UDP) based. Many MMAPI implementations support RTSP for streaming data, so in this section, you'll learn how to use it.

Note that when you create a `Player` instance with an HTTP-based locator, depending on the media type, it may resort to streaming as well, instead of downloading the entire contents. HTTP-based streaming doesn't preclude the idea of actually streaming the contents, it's just that it is inefficient.

To plug into streaming data, you need to work with a streaming server. Specialized servers abound, including RealTime Server (<http://www.realnetworks.com>), Apple's Darwin streaming server (<http://developer.apple.com/darwin/projects/streaming/>), and Helix (<http://www.helixcommunity.org>). For the example in this section, the streaming service provided by the BBC's live radio broadcast (<http://www.bbc.co.uk/radio/>) is used.

A streaming media Player instance is created by using the special locator string: `rtsp://<path-to-server>/<path-to-file-on-server>`. Thus, RTSP is the protocol, but the rest of the locator string resembles HTTP for accessing files.

Sadly, not many devices support RTSP, including the Motorola C975 (even though it says it does) and BenQ M75. However, you can use Listing 8-11 to run in any device that does support it, and tune into the BBC service.

Listing 8-11. Streaming Media over the Network

```
package com.apress.chapter8;

import javax.microedition.midlet.*;
import javax.microedition.lcdui.*;
import javax.microedition.media.*;

public class StreamingMediaMIDlet extends MIDlet {

    private Player player = null;
    private Display display = null;
    private Alert alert = null;

    private boolean error = false;

    public StreamingMediaMIDlet() {

        display = Display.getDisplay(this);
        alert = new Alert("Message");

        // try and create a Player instance for RTSP
        try {

            player = Manager.createPlayer(
                "rtsp://rmv8.bbc.net.uk/radio1/lockup.ra");

            if(player == null)
                throw new Exception("Could not create player for streaming");

            player.realize();

        } catch(Exception e) {
            error(e);
        }
    }
}
```

```

public void startApp() {
    if(error) return;

    try {
        player.start();
    } catch(Exception e) {
        error(e);
    }

    alert.setString("Playing streaming radio from BBC");
    display.setCurrent(alert);
}

public void pauseApp() {
}

public void destroyApp(boolean unconditional) {
    if(player != null) player.close();
}

// general purpose error method, displays onscreen as well to output
private void error(Exception e) {
    alert.setString(e.getMessage());
    alert.setTitle("Error");
    display.setCurrent(alert);
    e.printStackTrace();
    error = true;
}
}

```

As you can see, there is nothing of note in this code, and you have learned to create `Player` instances like this several times over. This is the beauty of the MMAPI implementation because it permits several protocols and formats to be played using similar coding techniques.

Finally, note that the radio streaming via the BBC service uses the Real Networks real audio file for streaming. This means that the device you run this MIDlet on must not only support RTSP, but be able to recognize and play the real audio content type as well. Of course, this media format doesn't have to be real audio, and can be any other audio or even video format. For video streaming data, you can easily create a `VideoControl` on the data and display it to the user, as you have learned to do in the "Working with Video" section of this chapter. You can even create a `RecordControl` on this data, and record it to the local file system, as discussed in the "Capturing Audio" and "Capturing Video and Images" sections. It just depends on what options are available to your device.

Summary

This chapter should have brought one point to the forefront about MMAPI: It truly is protocol and format agnostic. Different devices support different formats and protocols, but the basics of using these varied formats and protocols remain the same.

This chapter brought to a conclusion the discussion on the various media types that are supported by MMAPI by focusing on the two main types: audio and video. You learned to query, display, control, record, save, and stream these two types using a variety of examples. You also saw the frailty of the MMAPI implementations currently present in the development world. In fact, I had to change devices midstream because one of the chosen devices didn't do what it was supposed to do. This is an important lesson: Test all code in the chosen device!

The next and final chapter will show you a case study that covers some of the concepts discussed so far to create an audio, image, and video blogging MIDlet.

Case Study: Device Blogging

If you haven't been bit by the blogging bug yet, then blogging from your mobile phone is sure to make you give this exciting technology a try. Blogging allows you to post your ideas, experiences, and thoughts in an online journal-like medium, allowing for instantaneous access to the entire world. Couple this with integrated multimedia blogs and, in the case of mobile blogging, anywhere, anytime access, and you provide a richer, more involved user experience.

This chapter is a case study that details how to bring together the knowledge that you have gained in the rest of the book, especially concerned with audio/video/image capture and playback using MMAPi, and put that knowledge to good use by building a mobile blogging MIDlet called Device Blog. Device Blog will allow you to blog text-, audio-, image-, and video-based blog entries directly from your mobile phone or device.

About the Companion Web Site

Creating a mobile blogging application without an actual live Web site against which you can practice is not much fun. The issues that arise in posting blog entries to the server may not impact much on your knowledge of MMAPi, but it's nonetheless instructive to test your ideas in a live environment. Therefore, the companion Device Blog site, which is a very simple blog entries display site, lists the entries posted to it in a sequential order, along with any multimedia components. You can test the Device Blog MIDlet that you will build in this chapter against this site at <http://www.mmapibook.com/deviceblog/index.jsp>.

Besides the index page, the Device Blog site also contains other Java Server Page (JSP) based files, which allow a user to register, log in, and post entries to it. These pages are meant to be accessed from a mobile device, but to keep things simple, no checks are done if requests are made from other direct sources as well.

The Finished MIDlet in Action

Before you learn to build the Device Blog MIDlet, take a look at the final views in some of the devices as shown in the upcoming figures. This storyboard of sorts will also serve as a Use Case for this MIDlet application.

MIDlet Startup

At startup, the MIDlet presents three choices to the user: Login, Register, and Create Blog Entry. This is shown in Figure 9-1 across the Motorola C975 device, the BenQ M75 device, and Sun's DefaultColorPhone emulator.



Figure 9-1. Starting the Device Blog MIDlet

Registering with the Device Blog Web Site

The user can choose to register with the Device Blog server by selecting the Register option. The link to register is supplied in the MIDlet's JAD file as a system property: <http://www.mmapibook.com/deviceblog/register.jsp>. When the user selects the Register option, the screen shown in Figure 9-2 appears.



Figure 9-2. Registering with the Device Blog Web site

The user enters the desired values, which are just the username and password (with a confirm password field as well), to keep things simple and interaction fast.

Of course, because the mobile device interacts with the server, access over the Internet is required and permission from the user is requested, as shown in Figure 9-3. This applies not just for registration, but for logging in and posting blog entries as well.

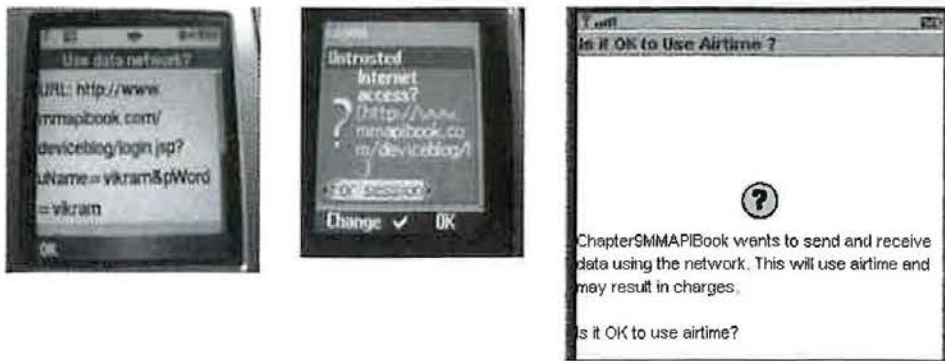


Figure 9-3. Accessing the Internet requires user permission.

The server sends back messages such as “Registered” for successful registration, “Username exists” for duplicate usernames, and any other error messages for protocol or network issues. Internet access is not attempted for nonmatching passwords and incomplete fields, which are handled at MIDlet level.

Logging in to Device Blog Web Site

After a successful registration, the user can log in. Note that the user cannot create a blog entry (the third option in Figure 9-1) until the user has registered and/or logged in first. The login screens are shown in Figure 9-4.



Figure 9-4. Logging on to the Device Blog Web site

As you may notice, the login and registration screens look remarkably similar; this common interface keeps things simple.

The login URL is <http://www.mmapibook.com/deviceblog/login.jsp> and is read from the MIDlet's JAD file.

The server's response will be either “Logged In”, “Username not found. Please register”, or “Invalid Password!”, as the case may be. Figure 9-5 shows the screens for a successful login.



Figure 9-5. Successful login to the Device Blog Web site

Creating and Posting Blog Entries

By selecting the Create Blog Entry option, the user is presented with another screen where the choices allow the user to create one of four types of entries: Text Only, Audio, Image, and Video (see Figure 9-6).



Figure 9-6. Selecting the entry type for posting to the Device Blog Web site

Of course, not all phones support all the options, especially, video. The user is informed of this when selecting this option, as shown in Figure 9-7 on the Motorola C975 device, which as you may recall from Chapter 8, doesn't support video recording.



Figure 9-7. Video recording is not supported on Motorola C975.

As you may recall, the Sun DefaultColorPhone emulator doesn't support video recording either, and you'll get the same message in that if you select the video option.

Text Only

The text only option is the simplest and allows the user to write a title and an associated message as shown in Figure 9-8.



Figure 9-8. *Creating a text-only entry*

After the user selects the OK menu option, a preview of the entry appears as shown in Figure 9-9.



Figure 9-9. *Preview the text-only blog entry.*

At this point, the user can discard this entry, edit the text again, or post the entry to the server. These choices are the same throughout and apply to all types of blog entries. These choices are shown in Figure 9-10 in Sun's DefaultColorPhone emulator.

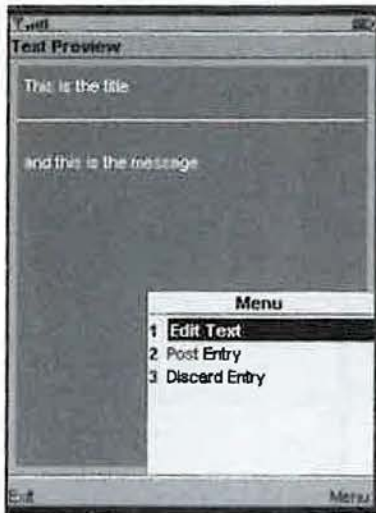


Figure 9-10. User presented with blog entry choices

Choosing Edit Text takes the user back to the screen shown earlier in Figure 9-8. Choosing Discard Entry takes the user to the startup screen. Finally, Post Entry makes the connection to the server and posts the entry.

The URL for posting entries is picked up from the JAD file: <http://www.mmapibook.com/deviceblog/postentry.jsp>. The resultant message is shown to the user on the screen; for a successful post, it reads "Posted". At this point, the startup screen is shown to the user.

As expected, these choices and actions remain the same for any type of blog entry.

Audio

Recording audio requires permission from the user; therefore, before the record audio screen is shown, the MIDlet shows the permissions screen (see Figure 9-11).



Figure 9-11. Getting permission from the user for recording audio

Of course, all three media types require the user to grant these permissions. The user has the choice of granting the permissions only once or for the session, in which case, he won't be prompted for them again.

After the permission is given, the recording canvas is shown, which automatically starts recording audio and doesn't finish until the user selects the Done menu item. These two stages are shown in Figure 9-12 on the Motorola C975 device.



Figure 9-12. Recording and previewing audio on the Motorola C975 device

As you can see, when the user presses the Done menu item, the device previews the recorded audio by playing it back. At this point, the user can discard the entry, add text to it by selecting edit text, or post it to the server; the same choices that were discussed in the last section.

Image

For image recording and previewing, first the user is shown the viewfinder of the onboard camera and then shown the associated snapshot that is taken when the user presses the Done menu item. This process is shown in Figure 9-13 on the Motorola C975 device and in Figure 9-14 on the BenQ M75 device.



Figure 9-13. Capturing and previewing images on the Motorola C975 device

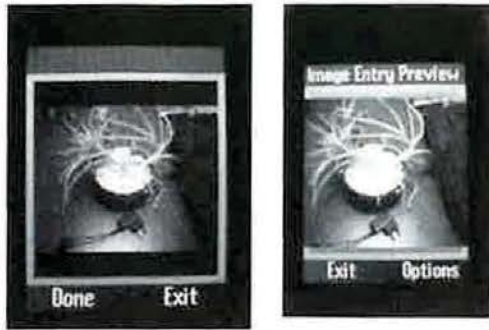


Figure 9-14. *Capturing and previewing images on the BenQ M75 device*

The user choices at this point remain the same as described in the previous sections.

Video

Video capture via MMAPi is not supported on too many devices. Fortunately, the BenQ M75 does support it in a limited way. Figure 9-15 shows the video capture and preview process in this device.



Figure 9-15. *Capturing and previewing video on the BenQ M75 device*

As expected, the options at this point remain the same: Discard Entry, Edit Text, or Post Entry.

Creating the MIDlet Design

To create the finished MIDlet's client application using the storyboard ideas penned in the last section, I'm using the Model-View-Controller (MVC) pattern, popularized by the Struts Web framework. Generalizations and modifications to this pattern need to be made, however, to keep the realities of development on small devices in check.

The Model

Based on what you know so far, a fair crack at building the model for the Device Blog can be attempted. This model is shown in Figure 9-16 using Unified Modeling Language (UML).

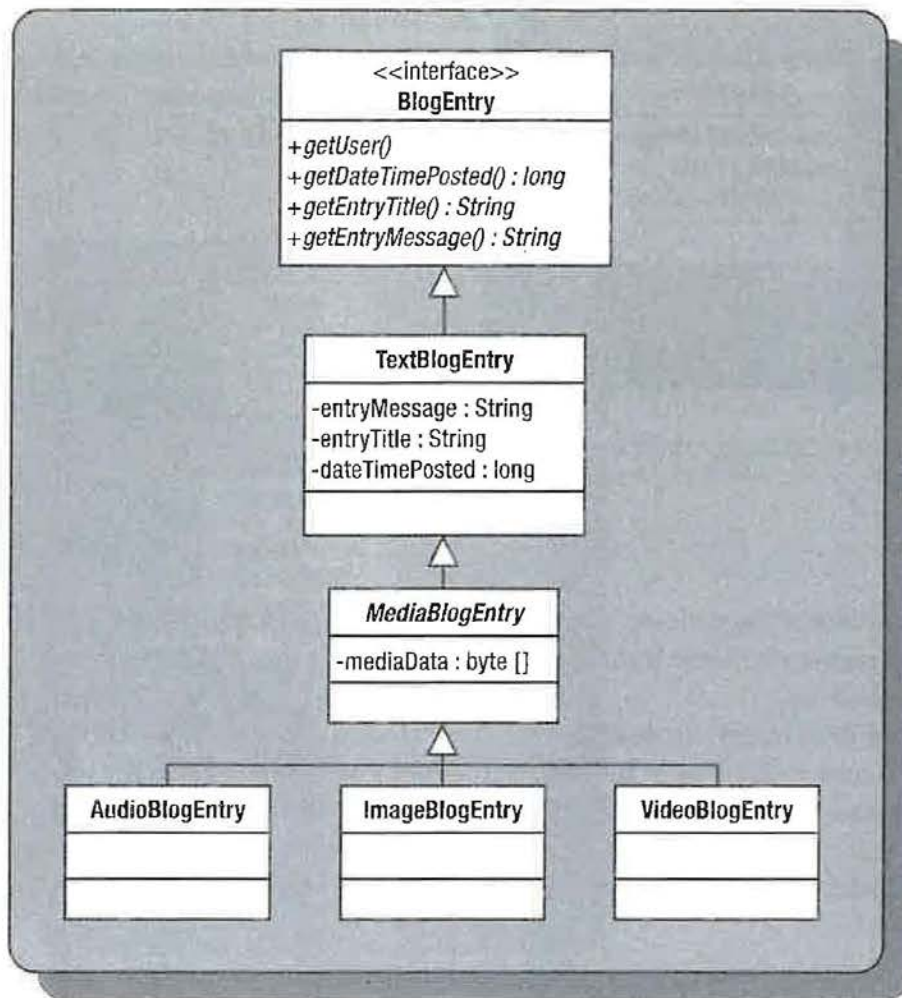


Figure 9-16. Model for the Device Blog MIDlet application

A **BlogEntry** interface sits at the top of this model and defines the characteristics of any entry created in this MIDlet. It mandates four self-explanatory methods that must be implemented by its implementations.

The **TextBlogEntry** class is the only implementation for this interface in this model and provides representation for blog entries that are only textual in nature, without any associated media parts. **MediaBlogEntry**, which extends the **TextBlogEntry** class, adds the media part, but is an abstract class. Concrete implementations include representation for each of the three different types of blog entries: **AudioBlogEntry**, **ImageBlogEntry**, and **VideoBlogEntry**. Each of the media blog entries gets a textual part and a media part.

These are not the only classes in the model. You need something to represent the user of the MIDlet and a class to model the server. These two classes are shown in Figure 9-17.

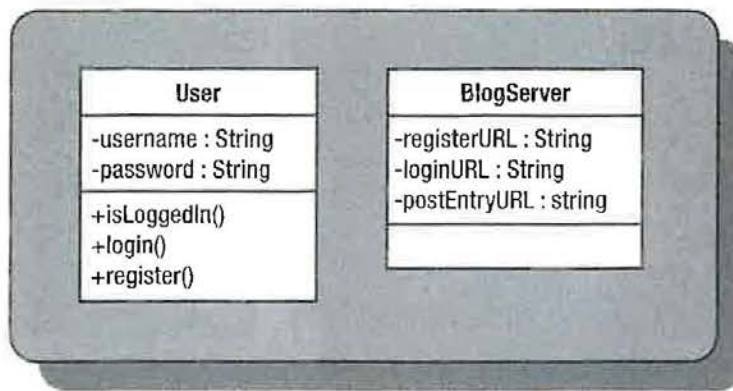


Figure 9-17. *User and BlogServer classes round up the Device Blog model.*

The View

The view of this MIDlet consists of the various `Form` and `Canvas` instances that interact with the user, along with a few `List` elements. These instances are generalized in this MIDlet to arrive at a common set of functionalities.

The `List` instances are easy to conceptualize. Only two areas require lists: at MIDlet startup (refer to Figure 9-1) and at the time of presenting the blog creation choice to the user (refer to Figure 9-6). These lists follow the same theme of presenting a list, using implicit list handling for commands, and providing a similar set of commands. Therefore, a `GenericList` is created, and the actual lists derive from this class. The UML diagram for these lists is shown in Figure 9-18.

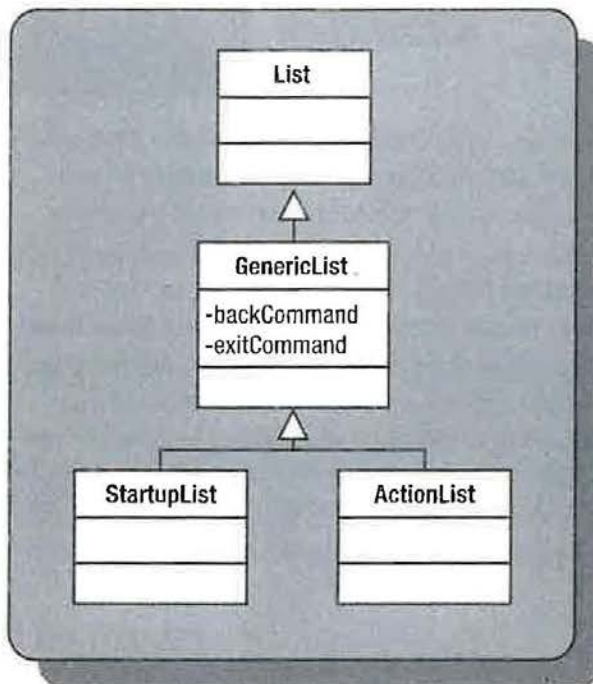


Figure 9-18. *Bundling together common functionalities of a List*

The same concept applies to the login and registration Form instances, common functionality of which can be put together in a `GenericForm` class. This class adds the commands OK, Exit, and Back, and classes that derive from this class can add their own Form items and behaviors. The UML for this structure is shown in Figure 9-19.

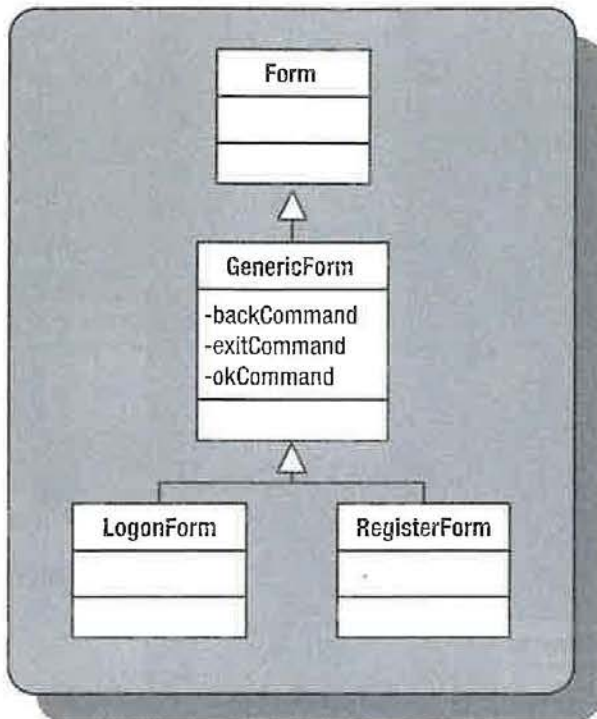


Figure 9-19. Bundling together common functionalities of a Form

Two sets of views remain to be created: one set for editing blog entries and one for previewing them. For editing (as with preview), it's useful to define a common set of functionalities and behaviors for the view that work similarly across all implementations. With this in mind, `EditableDisplay` is created as an interface that has only one method called `showDisplay()`. All implementations are then free to create their own way of handling the editable parts of the display by providing an implementation for the `showDisplay()` method. For textual entries, it's essential to provide a Form-based view, whereas others may provide Canvas-based views. The UML for the editing set of classes is shown in Figure 9-20.

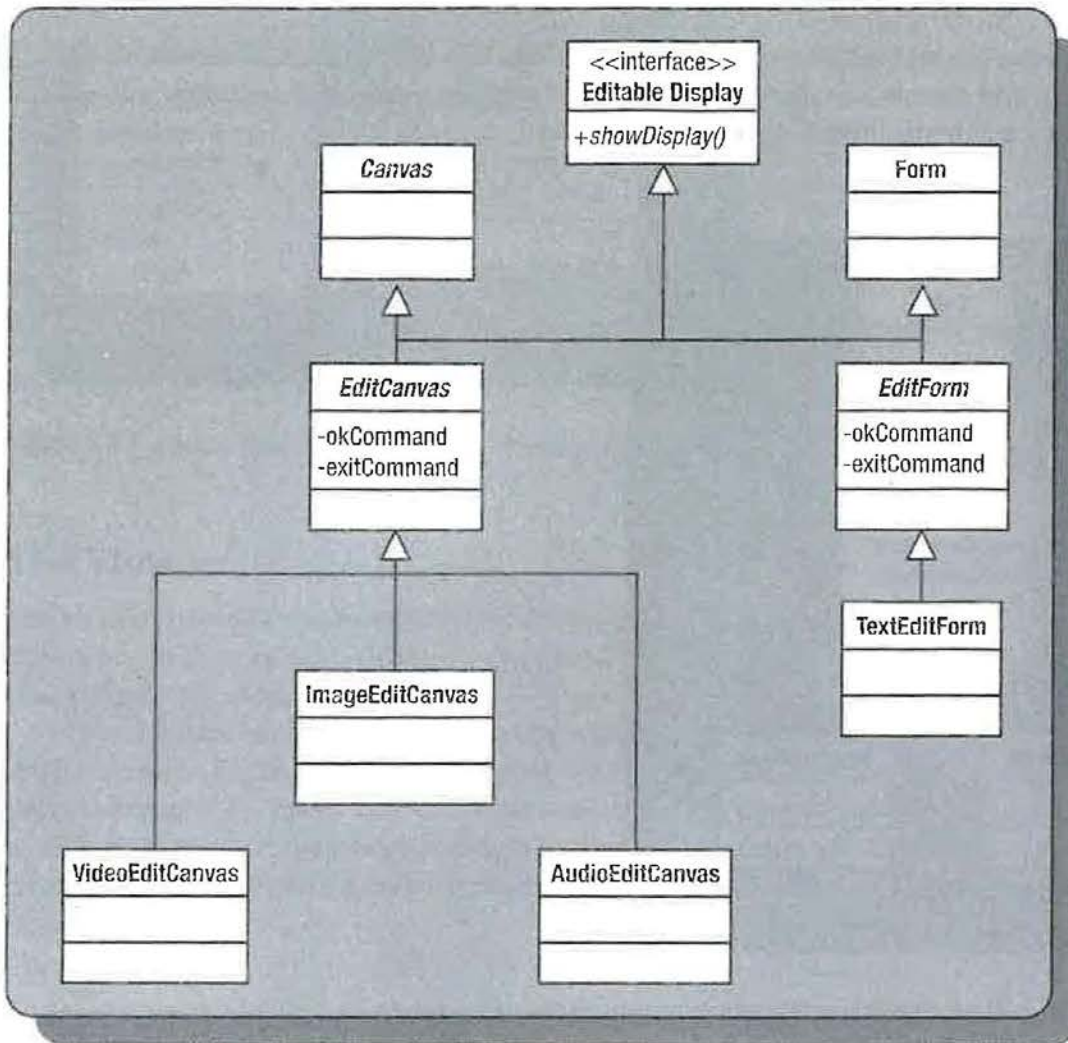


Figure 9-20. Defining the blog editing set of classes in the Device Blog MIDlet

As you can see, two abstract classes implement the EditDisplay interface. These classes are EditForm, which extends the Form class and provides the base class for editing textual blog entries, and EditCanvas, which extends the Canvas class and provides the base class for editing media blog entries.

Similarly, the set of view classes for previewing blog entries can be created. However, no separate distinction needs to be made between text- and media-based entries because everything is to be displayed on a Canvas. These set of classes are shown in Figure 9-21.

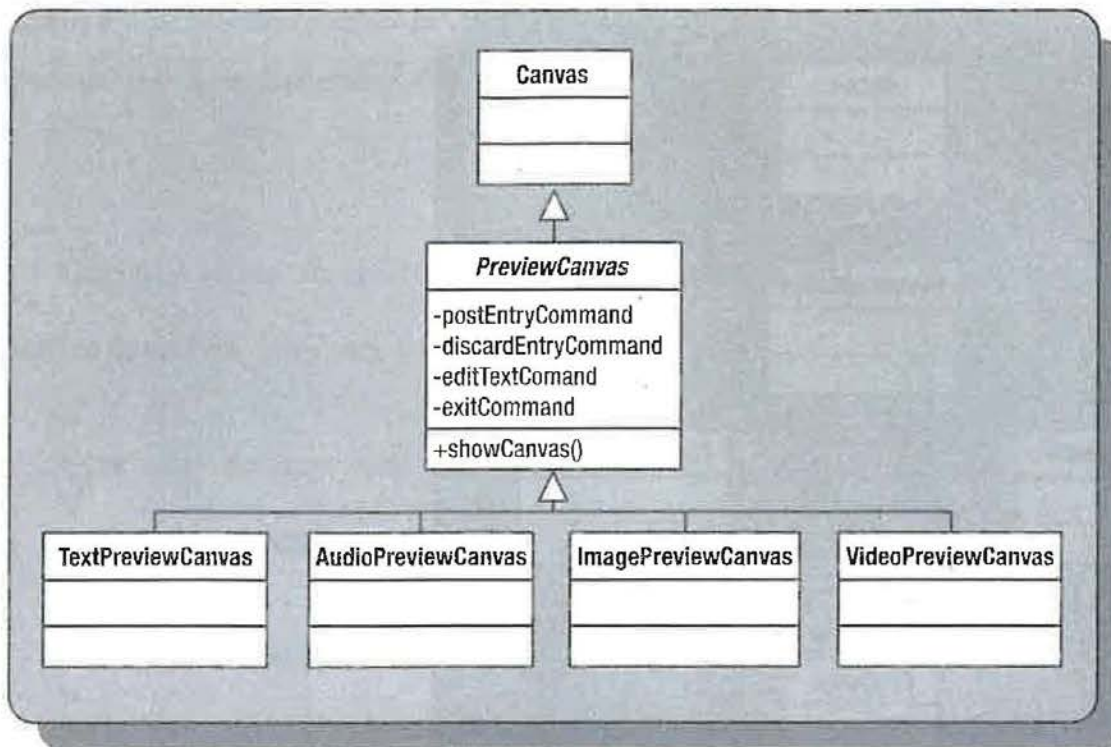


Figure 9-21. *Defining the blog preview set of classes*

As you can see, the `PreviewCanvas` abstract class encapsulates the behavior by providing the commands that are required at this stage of the view in this MIDlet. What remains is for the subclasses to provide an implementation of the `showCanvas()` method to display to the user a preview of the blog entry as the subclasses deem fit.

The Control

The control in this MVC pattern is made up of two classes: the `BootstrapMIDlet` and a specialized class called the `Controller`. The `Controller` class handles the interactions between the view and the model and generally keeps things moving by providing resources, action and error screens, and so on. The `BootstrapMIDlet`, as denoted by the name, is the class that starts this MIDlet application initially. Figure 9-22 shows these two classes.

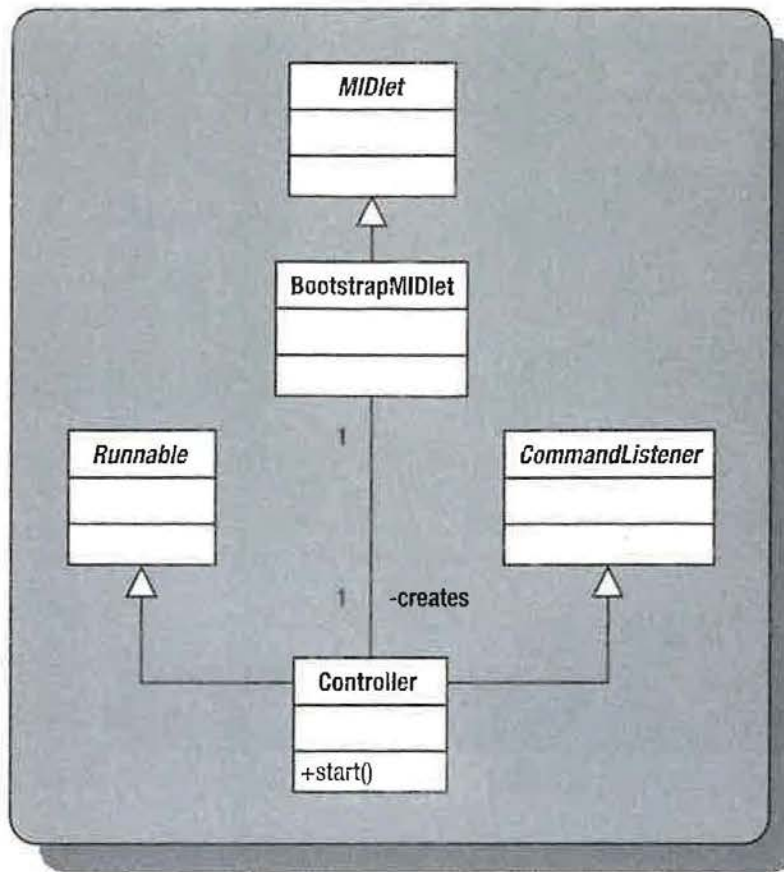


Figure 9-22. *The control classes of the Device Blog MIDlet*

Two other utility classes, `NetworkRunner` and `URLEncoder`, do not fit in any of the classifications so far. `NetworkRunner` provides network connections that are run via a single thread, whereas `URLEncoder` is used to encode the URL query strings.

Creating the MIDlet Code

The previous section provided an idea of what classes are required to create the Device Blog MIDlet application. Let's start by creating the classes of the model, which should be fairly easy because they are essentially Plain Old Java Objects (POJOs).

Creating the Model Classes

The model classes include the `BlogEntry` interface and its sole implementation, `TextBlogEntry`, which is then extended by the abstract class `MediaBlogEntry`. The `AudioBlogEntry`, `ImageBlogEntry`, and `VideoBlogEntry` then provide implementations for this class to represent audio, image, and video blog entries, respectively.

Listing 9-1 shows the code for the `BlogEntry` interface.

Listing 9-1. *BlogEntry Interface for All Types of Blog Entries*

```
package com.apress.chapter9.model;

/**
 * BlogEntry is the interface that represents the blog entries as a model
 */
public interface BlogEntry {

    /**
     * The user who is posting this entry
     */
    public User getUser();

    /**
     * The DateTime when the entry was posted
     */
    public long getDateTimePosted();

    /**
     * The title of this entry, if any
     */
    public String getEntryTitle();

    /**
     * The message of this entry, if any
     */
    public String getEntryMessage();
}
```

Listing 9-2 shows the code for TextBlogEntry.

Listing 9-2. *TextBlogEntry Represents All Entries That Have a Textual Component*

```
package com.apress.chapter9.model;

/**
 * TextBlogEntry implements BlogEntry and represents a TextEntry for the Blog.
 * It also acts as a base class for other media type entries.
 */
public class TextBlogEntry implements BlogEntry {

    // the title of this entry, if any
    private String entryTitle = null;
```

```

// the message of this entry, if any
private String entryMessage = null;

// the time this entry was posted
private long dateTimePosted = 0;

// the user who is making this entry
private User user = null;

public TextBlogEntry(User user) {
    this.user = user;
}

// getter and setters for entry title and message
public String getEntryTitle() { return this.entryTitle; }
public void setEntryTitle(String entryTitle) {
    this.entryTitle = entryTitle;
}

public String getEntryMessage() { return this.entryMessage; }
public void setEntryMessage(String entryMessage) {
    this.entryMessage = entryMessage;
}

// time posted is immutable
public long getDateTimePosted() {
    return this.dateTimePosted;
}

// the user who is posting this entry
public User getUser() {
    return this.user;
}
}

```

Notice that the `getDateTimePosted()` method has only a getter method and is therefore immutable. This makes sense, because once posted, you wouldn't want to change this value. Also note that this value is stored as a long type.

Listing 9-3 shows the code for the `MediaBlogEntry` abstract class.

Listing 9-3. *MediaBlogEntry Represents Blog Entries That Have a Media Component*

```

package com.apress.chapter9.model;

/**
 * This abstract class encapsulates all the blog entries that have a media
 * component along with any text component. This is why it extends the
 * TextBlogEntry class
 */
public abstract class MediaBlogEntry extends TextBlogEntry {

```

```
// the mediaData
protected byte[] mediaData = null;

// the contentType of the media
protected String contentType = null;

protected MediaBlogEntry(User user) {
    super(user);
}

public byte[] getMediaData() { return this.mediaData; }
public void setMediaData(byte[] mediaData) { this.mediaData = mediaData; }

public String getContentType() { return this.contentType; }
public void setContentType(String contentType) {
    this.contentType = contentType;
}

/**
 * This method tries to guess the extension of the likely media data
 * file that will be gauged from the content type of this data
 */
public String guessFileExtension() {

    if(contentType == null || contentType.length() == 0) return "";

    contentType = contentType.toLowerCase();

    if(contentType.equals("audio/x-wav")) return "wav";
    if(contentType.equals("audio/amr") ||
        contentType.equals("audio/amr-nb") ||
        contentType.equals("audio/amr-wb")) return "amr";

    if(contentType.equals("jpeg") ||
        contentType.equals("jpg") ||
        contentType.equals("image/jpeg") ||
        contentType.equals("image/jpg")) return "jpg";
    if(contentType.equals("gif") ||
        contentType.equals("image/gif")) return "gif";

    if(contentType.equals("video/mpeg")) return "mpg";
    if(contentType.equals("video/3gpp") ||
        contentType.equals("video/3gp")) return "3gp";

    return "unknown";
}
}
```


This class contains an interesting method, `guessFileExtension()`. This method analyzes the content type of the media data and returns an appropriate file extension, which is useful when this data is being posted to the server to help the server make an educated guess about the media type. Of course, this extension is guessed based on the content type of the media, which has its own getter and setter methods. The `guessFileExtension()` method may need to be changed to cater for different media types that may be available on your mobile device.

The class also contains getter and setter methods for the media data, which is stored in this class in a byte array.

The concrete implementations of `MediaBlogEntry`, `VideoBlogEntry`, `AudioBlogEntry`, and `ImageBlogEntry` are now easy to write and only contain a single constructor. Listing 9-4 shows the code for the `VideoBlogEntry` class. The other implementations are similar and are provided in the source code in the Downloads section of the Apress Web site at <http://www.apress.com> (as is the rest of the code).

Listing 9-4. *VideoBlogEntry Extends MediaBlogEntry and Represents Video Blog Entries*

```
package com.apress.chapter9.model;

/**
 * The VideoBlogEntry extends MediaBlogEntry and represents an entry that
 * has a video component in addition to a text component
 */
public class VideoBlogEntry extends MediaBlogEntry {

    public VideoBlogEntry(User user) {
        super(user);
    }
}
```

The only thing of note here is that while creating an entry, the user who is creating the entry must be provided. A user for this system is created using the `User` class shown in Listing 9-5 and forms part of the model.

Listing 9-5. *User Class Represents the User of the Device Blog MIDlet*

```
package com.apress.chapter9.model;

import com.apress.chapter9.control.Controller;

/**
 * A simple user class to represent a user of this MIDlet. Contains only
 * userName and password. Once created, these values cannot be
 * changed
 */
public class User {

    // parameters that define this user
    private String userName = null;
    private String password = null;
```

```
// flag to indicate if the user has been successfully logged in
private boolean loggedIn = false;

// the controller
private Controller controller = null;

public User(String userName, String password, Controller controller) {

    // check for invalid values
    if(userName == null || userName.length() == 0 ||
        password == null || password.length() == 0)
        throw new IllegalArgumentException("One of the arguments is invalid");

    this.userName = userName;
    this.password = password;

    this.controller = controller;
}

// getters for the parameters
public String getUserName() { return this.userName; }
public String getPassword() { return this.password; }

/**
 * Tries to log the user into the blog server.
 */
public void login(String loginURL) {

    // use the Network Runner to make the connection
    controller.getNetworkRunner().makeConnection(
        loginURL + "?uName=" + getUserName() + "&pWord=" + getPassword());
}

/**
 * @return true if the user is logged in, false otherwise
 */
public boolean isLoggedIn() {

    if(controller.getNetworkRunner().isLoggedIn()) {
        this.loggedIn = true;
    }

    return this.loggedIn;
}

/**
 * Registers this user with the blog server.
 * Successful registration doesn't log the user in, and login must be
```

```

        * done separately.
        */
    public void register(String registerURL) {

        // use the Network runner to make the connection
        controller.getNetworkRunner().makeConnection(
            registerURL + "?uName=" + getUserName() + "&pWord=" + getPassword());
    }
}

```

The class provides getter and setter methods for the username and password properties and also methods that log on and register the user. The class uses the `NetworkRunner` class to make the connections; this class will be introduced in the next section.

Finally, the model also contains the `BlogServer` class, which acts as a container for the server on which blogging will be done. This class is shown in Listing 9-6.

Listing 9-6. *BlogServer Class Acts As a Container for the Blog Server*

```

package com.apress.chapter9.model;

/**
 * BlogServer represents the server on which the blog is hosted, and includes
 * URLs for various actions, such as registration, logging in, and posting entries
 */
public class BlogServer {

    // the URL for registration
    private String registerURL = null;

    // the URL for logging in
    private String loginURL = null;

    // the URL for posting a blog entry
    private String postEntryURL = null;

    public BlogServer(String registerURL, String loginURL, String postEntryURL) {
        this.registerURL = registerURL;
        this.loginURL = loginURL;
        this.postEntryURL = postEntryURL;
    }

    public String getRegisterURL() { return this.registerURL; }
    public String getLoginURL() { return this.loginURL; }
    public String getPostEntryURL() { return this.postEntryURL; }

}

```


The `BootstrapMIDlet` or the `Controller` class are responsible for creating the `BlogServer` class and provide values for the actual URLs. These are listed in the JAD file so that any change in their value doesn't require the MIDlet application to be recompiled.

Creating the Utility Classes

Before moving on to either the view or the control, let's create the utility classes because they are important for testing the MIDlet. Two utility classes are required: `NetworkRunner` and `URLEncoder`.

`NetworkRunner` is required because it acts as a central class for making all connections to the blog server. However, instead of creating a separate thread each time a network connection is required; this class keeps a single thread running. Creating multiple threads is an issue on mobile devices because of small memory footprints, especially in a situation where several connections may be required. Listing 9-7 shows this class.

Listing 9-7. *NetworkRunner Is a Single-Threaded HTTPConnection Class*

```
package com.apress.chapter9.utils;

import java.io.IOException;
import java.io.InputStream;
import java.io.OutputStream;
import javax.microedition.io.Connector;
import javax.microedition.io.HttpConnection;

import com.apress.chapter9.model.BlogEntry;
import com.apress.chapter9.control.Controller;
import com.apress.chapter9.model.MediaBlogEntry;
import com.apress.chapter9.control.BootstrapMIDlet;

public class NetworkRunner extends Thread {

    // the calling MIDlet
    private BootstrapMIDlet midlet = null;

    // the controller
    private Controller controller = null;

    // the reusable connection
    private HttpConnection connection = null;

    // flags
    private boolean cancel = false;
    private boolean running = false;

    // the URL to connect to, this will change
    private String url = null;
```

```
// the BlogEntry that may be sent
private BlogEntry entry = null;

// flags that indicate the success or failure of logging in,
// registration and posting
private boolean loginSuccess = false;
private boolean registerSuccess = false;
private boolean postSuccess = false;

public NetworkRunner(BootstrapMIDlet midlet, Controller controller) {
    this.midlet = midlet;
    this.controller = controller;
    running = true;
}

/**
 * Waits till a request is made for making a connection
 */
public synchronized void run() {
    while(running) {
        try {
            wait();
        } catch (InterruptedException ie) {}

        if(running) connect();
    }
}

/**
 * Calling threads must use this method to make a connection
 * providing the URL to connect to
 */
public synchronized void makeConnection(String url) {
    makeConnection(url, null);
}

public synchronized void makeConnection(String url, BlogEntry entry) {
    this.url = url;
    this.entry = entry;
    notify();
}

/**
 * Tries to make a connection with the network server, using the
 * URL that is provided to the makeConnection method
 */
private void connect() {
```

```
InputStream in = null;
OutputStream out = null;

try {

    // first encode the URL String
    controller.activityMessage("Encoding URL ...");
    String encodedURL = URLEncoder.encodeURL(this.url);

    // next get an HttpURLConnection on this URL
    controller.activityMessage("Opening connection ...");
    connection =
        (HttpURLConnection)Connector.open(encodedURL);

    // now check if this connection contains a media object by way
    // of an Entry object
    // if yes, then make this connection via HTTP POST
    if(this.entry != null) {

        // get the media data from this entry
        byte[] mediaData = ((MediaBlogEntry)entry).getMediaData();

        // set connection type and content length
        connection.setRequestMethod(HttpURLConnection.POST);
        connection.setRequestProperty(
            "Content-Length", (mediaData.length) + "");

        // open the OutputStream over which the media data will be sent
        out = connection.getOutputStream();

        // write the media data over this stream
        controller.activityMessage("Sending media data ...");
        out.write(mediaData);

        // to actually flush the stream check the response code
        int responseCode = connection.getResponseCode();

        if(responseCode != HttpURLConnection.HTTP_OK)
            throw new IOException("Transmission failed as server " +
                "responded with response code: " + responseCode);
    }

    // now irrespective of whether it was a POST or GET,
    // simply display to the user the response from the server

    // grab the input stream
    controller.activityMessage("Reading response ...");
    in = connection.getInputStream();
}
```



```

        // this can take a long time.. so check if the user has cancelled
        // before this
        if(cancel) return;

        // see the response and make sure it is not more than
        // 255 characters long
        int contentLength = (int)connection.getLength();
        if (contentLength == -1) contentLength = 255;
        byte[] data = new byte[contentLength];
        int length = in.read(data);

        // create a response message
        String message = new String(data, 0, length);
        midlet.message(message, 3000);

        // and process the type of the message
        processMessage(message);
    }
    catch (IOException ioe) {
        midlet.error(ioe); // show error
    } finally {

        // close connections
        if (!cancel) {
            try {
                if (in != null) in.close();
                if (out != null) out.close();
                if (connection != null) connection.close();
            }
            catch (IOException ie) {}
        }

        this.cancel = false;
    }
}

/**
 * This method is a way for the NetworkRunner to inform the rest of the
 * classes about the state of logging, registering and posting
 */
private void processMessage(String message) {
    if(message == null) return;

    message = message.trim();

    if(message.equals("Logged In!")) { logInSuccess = true; }
    else if(message.equals("Registered")) registerSuccess = true;

```

```

        else if(message.equals("Posted")) postSuccess = true;
    }

    public boolean isLoggedIn() { return this.logInSuccess; }
    public boolean isRegistered() { return this.registerSuccess; }
    public boolean isPosted() { return this.postSuccess; }

    /**
     * Cancel the network attempt
     */
    public void cancel() {
        try {
            cancel = true;
            if (connection != null) connection.close();
        } catch (IOException io) {} // ignore
    }
}

```

This listing is complete code and makes use of the `Controller`, `BootstrapMIDlet`, and the `URLEncoder` classes, which you'll encounter soon.

When this class is created in a thread and started, the `run()` method kicks into an infinite loop. However, this method lies in wait until `notify()` is called from the `makeConnection()` method. Classes that need to make a connection call this method, providing the URL to connect to. In case the connection needs to be done to post a `BlogEntry` to the server, an instance of that object is provided as well.

The `connect()` method makes the actual connection. All URLs are invoked using the HTTP GET method, except when an entry is being posted, in which case, the POST method is used. Actual media data is posted by opening an `OutputStream` and sending data across to it (the corresponding server process must accept the opening of such a connection).

The server sends simple strings back, which, in case of successful completion, will be one of three values: "Logged In!", "Registered", or "Posted". In this sense, this class is tied in with the Device Blog MIDlet application. You can remove these values and simply return the message returned by the server to make this class generic and useful in other applications.

In case of error, the `BootstrapMIDlet` is used to convey an error message, whereas the `Controller` class is used to display messages representing system activity that may take a while and that the user could possibly cancel. You'll see these methods shortly.

Before making a connection, the `connect()` method encodes the URL using the `URLEncoder` class. This is important to do because the user may type messages that contain characters that are invalid for use over HTTP. Listing 9-8 shows this class, which contains a single method `encodeURL()`.

Listing 9-8. *URLEncoder Class Contains a Single Method to Encode URLs*

```

package com.apress.chapter9.utils;

public class URLEncoder {

```

```
private static char getHex(int val) {
    if (val < 10) return (char)('0' + val);
    else return (char)('A' + (val - 10));
}

public static String encodeURL(String url) {

    // the return encoded URL
    StringBuffer returnUrl = new StringBuffer();

    // the length
    int size = url.length();

    for(int i = 0; i < size; i++) {

        // iterate over each character
        char ch = url.charAt(i);

        // if alphanumeric, it remains as such
        if ((ch >= '0' && ch <= '9') ||
            (ch >= 'a' && ch <= 'z') ||
            (ch >= 'A' && ch <= 'Z'))
            returnUrl.append(ch);
        else {

            // non alphanumeric

            // see first if this is one of the special characters.
            int spec = special.indexOf(ch);

            if (spec >= 0) {

                // this character is not in the special chars
                // String defined later
                returnUrl.append(ch);

            } else {

                // use the hex converter for the rest of the characters

                // first add the % character
                returnUrl.append('%');

                // next convert the high bits
                returnUrl.append(getHex((ch & 0xF0) >> 4));

                // and finally the low bits
                returnUrl.append(getHex(ch & 0x0F));
            }
        }
    }
}
```



```

    }
}

// the final encoded url
return returnUrl.toString();
}

private static String special = "&:/?\".-!~*'()";
}

```

Creating the View

The view contains several classes, some of which are mundane, such as `GenericList` and `GenericForm`, which serve no purpose by being listed here. (You can see these classes in the Downloads section on the Apress Web site.) Instead, Listing 9-9 shows the code for the `EditableDisplay` interface, which acts as the base from which all editable screens will be created.

Listing 9-9. *EditableDisplay Is the Base Interface for All Editable Objects*

```

package com.apress.chapter9.view;

/**
 * An EditableDisplay interface specifies custom objects that can be shown on
 * a screen
 */
public interface EditableDisplay {

    /**
     * The method that all these objects must implement
     */
    public void showDisplay();

}

```

The first class created from this interface is the `EditForm` abstract class. This class is shown in Listing 9-10.

Listing 9-10. *EditForm Class Implements EditableDisplay*

```

package com.apress.chapter9.view;

import javax.microedition.lcdui.Form;
import javax.microedition.lcdui.Command;
import javax.microedition.lcdui.CommandListener;

```

```
import com.apress.chapter9.model.BlogEntry;
import com.apress.chapter9.control.Controller;

/**
 * The EditForm is the super class for editing form based blog entries.
 * Subclasses have the task of displaying the contents to the user
 */
public abstract class EditForm extends Form
    implements EditableDisplay, CommandListener {

    // the controller object
    protected Controller controller = null;

    // the commands
    protected Command okCommand = null;
    protected Command exitCommand = null;

    // and the blog entry object
    protected BlogEntry entry = null;

    protected EditForm(Controller controller, BlogEntry entry) {
        super("Edit Form");

        // controller and entry are essential, and must not be null
        if(controller == null || entry == null)
            throw new IllegalArgumentException("Controller or entry cannot be null");

        this.controller = controller;
        this.entry = entry;

        // create commands
        okCommand = new Command("Ok", Command.OK, 1);
        exitCommand = new Command("Exit", Command.EXIT, 1);

        // add them to the Form
        addCommand(okCommand);
        addCommand(exitCommand);

        // and set the controller as the listener for commamnds
        setCommandListener(this);
    }

    /**
     * Returns the associated blog entry
     */
}
```

```

    public BlogEntry getBlogEntry() {
        return this.entry;
    }

}

```

The `EditForm` class is abstract but provides a concrete protected constructor, which creates items common to all subclasses. This class can now be used as a template for creating editable forms that will have an OK and an EXIT command attached to them. Note that each form will have a corresponding `BlogEntry` object attached with it, because a form must contain an entry that is being edited. Each form will also have a corresponding handle to the controller object. Listing 9-11 shows the code for the `TextEditForm` class that extends the `EditForm` class and will be used to create the screen shown in Figure 9-8.

Listing 9-11. *TextEditForm Used to Create Editable Form Screens for Text Blog Entries*

```

package com.apress.chapter9.view.impl;

import javax.microedition.lcdui.Command;
import javax.microedition.lcdui.TextField;
import javax.microedition.lcdui.Displayable;

import com.apress.chapter9.view.EditForm;
import com.apress.chapter9.model.BlogEntry;
import com.apress.chapter9.control.Controller;
import com.apress.chapter9.view.PreviewCanvas;
import com.apress.chapter9.model.TextBlogEntry;

/**
 * TextEditForm extends EditForm and is used for standalone text entries and
 * for editing text of media-based entries
 */
public class TextEditForm extends EditForm {

    // the title of this blog entry
    private TextField title = null;

    // the message of this blog entry
    private TextField message = null;

    public TextEditForm(Controller controller, BlogEntry entry) {

        super(controller, entry);

        // cast the entry to the right type
        TextBlogEntry textEntry = (TextBlogEntry)entry;
    }
}

```



```

        // create the TextFields
        title =
            new TextField("Title", textEntry.getEntryTitle(), 255, TextField.ANY);
        message = new TextField(
            "Message", textEntry.getEntryMessage(), 255, TextField.ANY);

        // and append them to this Form
        append(title);
        append(message);
    }

    /**
     * The showDisplay() method displays the text entry fields to the user
     */
    public void showDisplay() {
        controller.getDisplay().setCurrent(this);
    }

    public void commandAction(Command cmd, Displayable disp) {

        int commandType = cmd.getCommandType();

        if(commandType == Command.EXIT) {
            controller.processExit();
            return;
        } else if(commandType == Command.OK) {
            // to be added
        }
    }
}

```

The subclasses of the `EditForm` class are responsible for handling the commands, OK and EXIT. In Listing 9-11, the EXIT command is handled by invoking a method in the controller object. You'll add code for the OK command later.

The constructor for `TextEditForm` creates two text fields and attaches them to the `Form` using the `append()` method. The `showDisplay()` method, inherited from `EditableDisplay`, then simply shows this form on the screen. As expected, the constructor also receives a `BlogEntry` object, which can be cast to an appropriate `TextBlogEntry`. Notice that this class is in the `com.apress.chapter9.view.impl` package, instead of the `com.apress.chapter9.view` package.

It shouldn't be hard to see how to create the `EditCanvas` class, which will be used to create editable canvas subclasses for image, audio, and video as shown earlier in Figure 9-20. Listing 9-12 shows the code for the `EditCanvas` class, which also implements the `EditableDisplay` interface from Listing 9-9.

Listing 9-12. *EditCanvas Class Used As the Base Class to Create Editable Canvases*

```
package com.apress.chapter9.view;

import javax.microedition.lcdui.Canvas;
import javax.microedition.lcdui.Command;
import javax.microedition.lcdui.Graphics;
import javax.microedition.lcdui.CommandListener;

import com.apress.chapter9.model.BlogEntry;
import com.apress.chapter9.control.Controller;

/**
 * The EditCanvas is the super class for editing blog entries. Subclasses
 * have the task of displaying the contents to the user
 */
public abstract class EditCanvas extends Canvas
    implements EditableDisplay, CommandListener {

    // the controller object
    protected Controller controller = null;

    // the commands
    protected Command doneCommand = null;
    protected Command exitCommand = null;

    // the blog entry
    protected BlogEntry entry = null;

    protected EditCanvas(Controller controller, BlogEntry entry) {

        super();

        // controller and entry are essential, and must not be null
        if(controller == null || entry == null)
            throw new IllegalArgumentException("Controller or entry cannot be null");

        this.controller = controller;
        this.entry = entry;

        // create commands
        doneCommand = new Command("Done", Command.OK, 1);
        exitCommand = new Command("Exit", Command.EXIT, 1);
    }
}
```

```

        // add them to the Canvas
        addCommand(doneCommand);
        addCommand(exitCommand);

        // and set the controller as the listener for commands
        setCommandListener(this);
    }

    public void paint(Graphics g) {

        // first clear the screen
        g.setColor(0xFF8040);
        g.fillRect(0, 0, getWidth(), getHeight());

        // and then make a canvas with a border
        g.setColor(0x808040);
        g.fillRect(5, 5, getWidth() - 10, getHeight() - 10);

        // the rest of the work is left to subclasses

    }

}

```

Of course, `EditCanvas` must override the `paint()` method inherited from the `Canvas` class. However, it only clears the background, and subclasses are left to do the rest of the work. The protected constructor does tasks similar to the `EditForm` class and provides the basic infrastructure for subclasses, which must also provide implementation for the `showDisplay()` method. Listing 9-13 shows the code for the `AudioEditCanvas`, and the rest of the implementations are in code in the Downloads sections of the Apress Web site.

Listing 9-13. *AudioEditCanvas Used As the Editable Canvas for Audio Recordings*

```

package com.apress.chapter9.view.impl;

import java.io.IOException;
import java.io.ByteArrayInputStream;
import java.io.ByteArrayOutputStream;

import javax.microedition.lcdui.Image;
import javax.microedition.lcdui.Command;
import javax.microedition.lcdui.Graphics;
import javax.microedition.lcdui.Displayable;

import javax.microedition.media.Player;
import javax.microedition.media.Manager;
import javax.microedition.media.control.RecordControl;

```



```
import com.apress.chapter9.BlogException;

import com.apress.chapter9.model.BlogEntry;
import com.apress.chapter9.model.AudioBlogEntry;

import com.apress.chapter9.view.EditCanvas;
import com.apress.chapter9.view.PreviewCanvas;

import com.apress.chapter9.control.Controller;

/**
 * AudioEditCanvas is used to edit/record audio blog entry
 */
public class AudioEditCanvas extends EditCanvas implements Runnable {

    private Player capturePlayer = null;
    private RecordControl recordControl = null;
    private ByteArrayOutputStream bos = null;

    public AudioEditCanvas(Controller controller, BlogEntry entry) {
        super(controller, entry);
    }

    public void showDisplay() {

        // make this canvas the current display item
        controller.getDisplay().setCurrent(this);

        // repaint
        repaint();

        // and start the audio recording process
        new Thread(this).start();
    }

    public void run() {
        startAudioRecording();
    }

    public void paint(Graphics g) {

        // first call the superclass method
        super.paint(g);

        // now draw the mic image in the foreground
        try {
            g.drawImage(Image.createImage(
                getClass().getResourceAsStream("/media/images/chapter9/mic.gif")),
```

```
        getWidth()/2, getHeight()/2, Graphics.VCENTER | Graphics.HCENTER);
    } catch(IOException ioex) {} // ignore exception

    // also draw a message in white
    g.setColor(0x000000);

    g.drawString("Recording .... ",
        (getWidth()/2), (getHeight()/2) + 30, Graphics.TOP | Graphics.HCENTER);
}

private void startAudioRecording() {
    try {
        // create the capture player
        capturePlayer = Manager.createPlayer("capture://audio");

        if (capturePlayer != null) {
            // if created, realize it
            capturePlayer.realize();

            // and grab the RecordControl
            recordControl = (RecordControl)capturePlayer.getControl(
                "javax.microedition.media.control.RecordControl");

            // if RecordControl is null throw exception
            if(recordControl == null)
                throw new BlogException("RecordControl not available for audio");

            // create the buffer in which recording will be done
            bos = new ByteArrayOutputStream();

            // set the output of recording
            recordControl.setRecordStream(bos);

            // start the underlying player
            capturePlayer.start();

            // and the actual recorder
            recordControl.startRecord();
        } else {
            throw new Exception("Capture Audio Player is not available");
        }
    }
```

```
} catch(Exception e) {
    cleanUp(e);
}

}

public void commandAction(Command cmd, Displayable disp) {

    int commandType = cmd.getCommandType();

    if(commandType == Command.EXIT) {
        controller.processExit();
        return;
    } else if(commandType == Command.OK) {

        // complete the recording

        try {
            // flush the output buffer
            bos.flush();

            // commit the recording
            recordControl.commit();

            // close the player
            capturePlayer.close();

            capturePlayer = null;
        } catch(Exception ex) {
            cleanUp(ex);
            return;
        }

        // set the media data on this entry
        ((AudioBlogEntry)entry).setMediaData(bos.toByteArray());

        // set the media content type
        ((AudioBlogEntry)entry).setContentType(recordControl.getContentType());

        // release the resources
        bos = null;
        recordControl = null;

        // create a preview canvas and set this entry for it
        AudioPreviewCanvas pCanvas = new AudioPreviewCanvas(controller, entry);
```

```

        // and show it
        pCanvas.showCanvas();
    }
}

/**
 * This method is used to clean up and release resources on error
 */
private void cleanUp(Exception e) {

    // release resources on error
    if(recordControl != null) { recordControl = null; }
    if(capturePlayer != null) {
        capturePlayer.close();
        capturePlayer = null;
    }

    // and show the user the message
    controller.message(e.getMessage());
}
}

```

AudioEditCanvas does a lot of work because it handles the recording of audio as a blog entry. When its `showDisplay()` method is called, it repaints the screen with a simple image and a message and then starts a thread that actually tries to capture audio via the `startRecording()` method. When the user is done recording, the OK command handler wraps up the data in the associated `AudioBlogEntry` using the `setMediaData(byte[] data)` method. After this is done, it tries to clean up resources such as the `RecordControl` and the associated `Player` instances by closing them and then setting them to null, so that the Garbage Collector can reclaim them and free up resources.

After the recording is created successfully, the user should be able to hear it and preview it by creating the `AudioPreviewCanvas` with the controller and the `AudioBlogEntry`.

Listing 9-9 didn't have any code for the OK command handler, so Listing 9-13 needs to set the title and message on the associated `TextBlogEntry` and display the `TextPreviewCanvas`. This is similar to what you've done with the OK command handler for the `AudioEditCanvas`. This is shown here:

```

// get the values from the form, and set them in the entry
((TextBlogEntry)entry).setEntryTitle(title.getString());
((TextBlogEntry)entry).setEntryMessage(message.getString());

// create a preview canvas and set the entry for it
TextPreviewCanvas pCanvas = new TextPreviewCanvas(controller, entry);

// and show it
pCanvas.showCanvas();

```

Of course, you haven't created any preview canvases yet. Let's take a look at Listing 9-14, which shows the abstract class, `PreviewCanvas`.

Listing 9-14. *PreviewCanvas Is the Base Abstract Class for All Preview Canvases*

```

package com.apress.chapter9.view;

import javax.microedition.lcdui.Canvas;
import javax.microedition.lcdui.Command;
import javax.microedition.lcdui.Graphics;
import javax.microedition.lcdui.Displayable;
import javax.microedition.lcdui.CommandListener;

import com.apress.chapter9.model.BlogEntry;
import com.apress.chapter9.control.Controller;
import com.apress.chapter9.view.impl.TextEditForm;

/**
 * The PreviewCanvas is the superclass for previewing blog entries to the
 * user. Subclasses have the task of displaying the contents to the user
 */
public abstract class PreviewCanvas extends Canvas
    implements CommandListener {

    // the controller object
    protected Controller controller = null;

    // the BlogEntry
    protected BlogEntry entry = null;

    // the commands
    protected Command postEntryCommand = null;
    protected Command discardEntryCommand = null;
    protected Command editTextCommand = null;
    protected Command exitCommand = null;

    protected PreviewCanvas(Controller controller, BlogEntry entry) {
        super();

        // controller and entry are essential and must not be null
        if(controller == null || entry == null)
            throw new IllegalArgumentException("Controller or entry cannot be null");

        this.controller = controller;
        this.entry = entry;

        // create commands
        postEntryCommand = new Command("Post Entry", Command.OK, 2);
        discardEntryCommand = new Command("Discard Entry", Command.CANCEL, 2);
        editTextCommand = new Command("Edit Text", Command.SCREEN, 2);
        exitCommand = new Command("Exit", Command.EXIT, 1);
    }

```

```

    // add them to the Canvas
    addCommand(postEntryCommand);
    addCommand(discardEntryCommand);
    addCommand(editTextCommand);
    addCommand(exitCommand);

    // and set the controller as the listener for commamnds
    setCommandListener(this);
}

/**
 * Partially done paint method, which only paints the background
 */
public void paint(Graphics g) {

    // first clear the screen
    g.setColor(0xFF8040);
    g.fillRect(0, 0, getWidth(), getHeight());

    // and then make a canvas with a border
    g.setColor(0x808040);
    g.fillRect(5, 5, getWidth() - 10, getHeight() - 10);

    // the rest of the work is left to subclasses
}

public void commandAction(Command cmd, Displayable disp) {

    // first grab the type of the command
    int commandType = cmd.getCommandType();

    if(commandType == Command.EXIT) {

        // let the controller process the exit
        controller.processExit();

    } else if(commandType == Command.SCREEN) { // means editing text

        // create a new text edit form with the BlogEntry
        TextEditForm form = new TextEditForm(controller, entry);

        // and show it
        form.showDisplay();

    } else if(commandType == Command.CANCEL) { // means discard entry

```

```

        // simply show the startup list
        controller.getDisplay().setCurrent(controller.getStartUpList());

    } else if(commandType == Command.OK) { // means post entry to server

        controller.postEntry(entry);
    }
}

/**
 * Subclasses must implement this method as they see fit to show the contents
 * of this canvas
 */
public abstract void showCanvas();
}

```

This class is very similar to the `EditCanvas`, in that it creates a background but leaves the full painting to subclasses. However, this class does offer implementations for handling the various commands that are associated with it. These commands are Exit, Edit Text, Discard Entry, and Post Entry commands, as shown earlier in Figure 9-10. Thus, subclasses only need to worry about painting the partially done canvas as they see fit, leaving command handling to this class.

Listing 9-15 shows the code for the `ImagePreviewCanvas`. With most of the work handled by the superclass, this class only needs to work on its `paint()` method to display the image in the associated `ImageBlogEntry` object.

Listing 9-15. *ImagePreviewCanvas Shows the Associated Image to the User As a Preview*

```

package com.apress.chapter9.view.impl;

import java.io.IOException;
import java.io.ByteArrayInputStream;
import javax.microedition.lcdui.Image;
import javax.microedition.lcdui.Graphics;

import javax.microedition.media.Player;
import javax.microedition.media.Manager;

import com.apress.chapter9.control.Controller;

import com.apress.chapter9.view.PreviewCanvas;

import com.apress.chapter9.model.BlogEntry;
import com.apress.chapter9.model.ImageBlogEntry;

public class ImagePreviewCanvas extends PreviewCanvas {

```

```

public ImagePreviewCanvas(Controller controller, BlogEntry entry) {
    super(controller, entry);
    setTitle("Image Entry Preview");
}

public void showCanvas() {

    // make this canvas as the current display item
    controller.getDisplay().setCurrent(this);

    // and then repaint it
    repaint();
}

public void paint(Graphics g) {

    // get the superclass to clear background and repaint it first
    super.paint(g);

    // now simply create an Image from the byte array, and show it on
    // the canvas
    Image snapshot = null;

    try {

        ImageBlogEntry imgEntry = ((ImageBlogEntry)entry);
        byte[] imgData = imgEntry.getMediaData();
        snapshot = Image.createImage(imgData, 0, imgData.length);

    } catch(Exception e) {

        // show the error message to the user
        controller.message(e.getMessage());

        // and return
        return;
    }

    // now draw the image on this canvas
    g.drawImage(snapshot, getWidth()/2, getHeight()/2,
        Graphics.HCENTER | Graphics.VCENTER);
}
}

```

The `showDisplay()` method makes this canvas as the current display object and then calls `repaint()`, where the image data contained in the associated `ImageBlogEntry` is displayed on the screen using the `Graphics` object. Similarly, Listing 9-16 contains the code for the

VideoPreviewCanvas, which uses a video Player instance to preview the video to the user by using roughly the same principles.

Listing 9-16. VideoPreviewCanvas *Previews the Video to the User*

```
package com.apress.chapter9.view.impl;

import java.io.IOException;
import java.io.ByteArrayInputStream;
import javax.microedition.lcdui.Image;
import javax.microedition.lcdui.Graphics;

import javax.microedition.media.Player;
import javax.microedition.media.Manager;
import javax.microedition.media.MediaException;
import javax.microedition.media.control.VideoControl;

import com.apress.chapter9.control.Controller;

import com.apress.chapter9.view.PreviewCanvas;

import com.apress.chapter9.model.BlogEntry;
import com.apress.chapter9.model.VideoBlogEntry;

public class VideoPreviewCanvas extends PreviewCanvas {

    public VideoPreviewCanvas(Controller controller, BlogEntry entry) {
        super(controller, entry);
        setTitle("Video Entry Preview");
    }

    public void showCanvas() {

        // make this canvas as the current display item
        controller.getDisplay().setCurrent(this);

        // and then repaint it
        repaint();

        // finally play back the recording
        playbackVideoRecording();

    }

    public void paint(Graphics g) {
```

```
// get the superclass to clear the background and repaint it first
super.paint(g);
}

private void playbackVideoRecording() {

    VideoBlogEntry vEntry = (VideoBlogEntry)entry;

    ByteArrayInputStream bis =
        new ByteArrayInputStream(vEntry.getMediaData());

    Player player = null;
    VideoControl vControl = null;

    try {

        // create the Playback player
        player = Manager.createPlayer(bis, vEntry.getContentType());

        // realize it
        player.realize();

        // create the playback video control
        vControl = (VideoControl)player.getControl(
            "javax.microedition.media.control.VideoControl");

        // initialize it
        vControl.initDisplayMode(VideoControl.USE_DIRECT_VIDEO, this);

        vControl.setDisplayLocation(5, 5);

        try {
            vControl.setDisplaySize(getWidth() - 10, getHeight() - 10);
        } catch (MediaException me) {} // ignore

        vControl.setVisible(true);

        // start it
        player.start();

    } catch (Exception e) {

        // release this player instance
        if(player != null) { player.close(); player = null; }

        // show the error message to the user
        controller.message(e.getMessage());
    }
}
```

```

        // and return
        return;
    }
}
}

```

The `AudioPreviewCanvas` is similar and is provided in the Downloads section of the Apress Web site.

This finishes the code listings for the view part. The only classes left are those of the control part, which hold the model and the view together.

Creating the Control Classes

As you may recall, the control classes are the `BootstrapMIDlet` class, which starts the Device Blog MIDlet, and the `Controller` class, which is the glue that holds this MIDlet together. The `BootstrapMIDlet` is shown in Listing 9-17.

Listing 9-17. *BootstrapMIDlet Is the Entry Point for the Device Blog MIDlet Application*

```

package com.apress.chapter9.control;

import javax.microedition.lcdui.Alert;
import javax.microedition.lcdui.Display;
import javax.microedition.lcdui.Command;
import javax.microedition.midlet.MIDlet;

import com.apress.chapter9.BlogException;
import com.apress.chapter9.model.BlogServer;
import com.apress.chapter9.utils.NetworkRunner;

/**
 * BootstrapMIDlet is the startup MIDlet that loads the initial data and
 * starts the service. If any initial parameters are missing, it will abort.
 * It requires the URLs for posting, logging, and registering defined in the
 * MIDlet JAD and manifest file.
 */
public class BootstrapMIDlet extends MIDlet {

    // the display
    private Display display = null;

    // the controller that will drive this MIDlet
    private Controller controller = null;

    // the thread in which this MIDlet will be run
    private Thread runner = null;

    // the thread used for creating network connections
    private NetworkRunner networkThread = null;

```

```

// the BlogServer contains the URL information
private BlogServer blogServer = null;

// flag to indicate if any error occurs
private boolean error = false;

public void startApp() {

    if(display == null) {
        // get the display
        display = Display.getDisplay(this);

        // load the initial URL parameters
        try {
            loadParameters();
        } catch(BlogException be) {
            error(be);
        }

        // create the new Controller passing this MIDlet as the reference
        controller = new Controller(this);

        // create the runner thread
        runner = new Thread(controller);

        // create the Network Runner thread
        networkThread = new NetworkRunner(this, controller);

        runner.start();
        networkThread.start();
    }
}

/**
 * loads the URL parameters from the Manifest
 */
private void loadParameters() throws BlogException {

    // the registration URL
    String registerURL = getAppProperty("Blog-registerURL");

    // the login URL
    String loginURL = getAppProperty("Blog-loginURL");

    // the URL for posting entries
    String postEntryURL = getAppProperty("Blog-postURL");

```



```
// if any of them is null or not defined, throw Exception
if(registerURL == null || registerURL.length() == 0 ||
    loginURL == null || loginURL.length() == 0 ||
    postEntryURL == null || postEntryURL.length() == 0)
    throw new BlogException("One of the Blog server URL's is not defined.");

// otherwise create the BlogServer information object
blogServer = new BlogServer(registerURL, loginURL, postEntryURL);
}

// getter for BlogServer
public BlogServer getBlogServer() { return this.blogServer; }

// getter for Display
public Display getDisplay() { return this.display; }

// getter for NetworkThread
public NetworkRunner getNetworkRunner() { return this.networkThread; }

public void pauseApp() {
}

public void destroyApp(boolean unconditional) {
}

/**
 * General purpose nonerror message display method
 */
public void message(String msg, int time) {
    Alert alert = new Alert("Message");
    alert.setString(msg);
    alert.setTimeout(time);

    display.setCurrent(alert, controller.getStartupList());
}

/**
 * General purpose error message display method
 */
public void error(Exception e) {
    Alert alert = new Alert("Error");
    alert.setString(e.getMessage());
    alert.setTimeout(Alert.FOREVER);

    display.setCurrent(alert, controller.getStartupList());
}
```

```

        error = true;
    }
}

```

The BootstrapMIDlet class loads the parameters for the blog server from the JAD file, initializes the Controller class and the NetworkRunner class, starts these threads (all in the startApp() method), and provides utility methods for showing error and normal message to the user.

The Controller actively controls the flow of the MIDlet application. It creates the GenericForm and GenericList classes and handles the commands associated with them. It leaves most of the command handling of the Preview and Edit canvases to these canvases themselves, but it keeps the task of posting entries to the server to itself. In the interest of conserving space, the complete code for this class is not listed here, but only a few code snippets. First, Listing 9-18 shows the code for the postEntry(BlogEntry entry) method.

Listing 9-18. postEntry(BlogEntry entry) *Method of the Controller Class*

```

/**
 * Has the responsibility of posting an entry to the server
 */
public void postEntry(BlogEntry entry) {

    // first show the message to the user
    activityMessage("Connecting to server ... ");

    // now get the post entry url
    String postURL = midlet.getBlogServer().getPostEntryURL();

    // construct the parameters in the URL
    postURL += "?title=" + entry.getEntryTitle() +
               "&message=" + entry.getEntryMessage() +
               "&dateposted=" + System.currentTimeMillis() +
               "&uName=" + entry.getUser().getUserName();

    // and use the network runner to post the URL based on the
    // type of the entry
    if(entry instanceof MediaBlogEntry) {

        MediaBlogEntry mediaEntry = ((MediaBlogEntry)entry);

        String type =
            ((mediaEntry instanceof AudioBlogEntry) ? "audio" :
             ((mediaEntry instanceof ImageBlogEntry) ? "image" : "video"));

        getNetworkRunner().makeConnection(
            postURL +
            "&media=" + mediaEntry.guessFileExtension() +
            "&type=" + type +
            "&mediasize=" + mediaEntry.getMediaData().length, entry);
    }
}

```

```

    } else {
        getNetworkRunner().makeConnection(postURL);
    }
}

```

This method makes a distinction between posting text entries and media entries. If a media entry is being posted, it puts extra information about the entry, including the type of media, the size of the media, and expected file extension in the URL, as a query string. If a text-based entry is being sent, only the normal parameters, such as title, message, date posted, and user-name, are provided.

Listing 9-19 provides the code snippet of the Controller class handling the user selection for the type of blog entry to create, as shown earlier in Figure 9-6.

Listing 9-19. *Handling User Selection of Type of BlogEntry*

```

// if the user wants to create an entry
int selectedIdx = actionList.getSelectedIndex();

// initialize the display
EditableDisplay editDisplay = null;

// and the associated entry
BlogEntry blogEntry = null;

// now based on what type of entry it is, create the right
// editable display and entry
switch(selectedIdx) {
    case 0: // text only
    {
        blogEntry = new TextBlogEntry(user);
        editDisplay = new TextEditForm(this, blogEntry);
        break;
    }
    case 1: // audio
    {
        blogEntry = new AudioBlogEntry(user);
        editDisplay = new AudioEditCanvas(this, blogEntry);
        break;
    }
    case 2: // image
    {
        blogEntry = new ImageBlogEntry(user);
        editDisplay = new ImageEditCanvas(this, blogEntry);
        break;
    }
    case 3: // only case left, video
    {
        blogEntry = new VideoBlogEntry(user);
        editDisplay = new VideoEditCanvas(this, blogEntry);
    }
}

```

```

        break;
    }
}

editDisplay.showDisplay();

```

Based on the user selection, the code creates the appropriate type of `BlogEntry` and editing form. In the end, the code invokes the `showDisplay()` method of `EditableDisplay` interface to display the right editing canvas/form created with the right `BlogEntry` type.

On the Server Side

The code for the server side contains four very simple JSP-based pages. To keep things simple, this example is using a file-based blogging system instead of blogging entries to a database. The `postentry.jsp` file receives the entries from the user and files them into user-based directories. This file is shown in Listing 9-20.

Listing 9-20. *postentry.jsp Accepts Blog Entries from the Device Blog and Files Them in the File System*

```

<%@ page contentType="text/plain;charset=UTF-8" language="java"
    import="java.io.File, java.io.*" %>

<%--
    Simple postentry.jsp tries to post an entry to the server
--%>

<%

    String title = (String)request.getParameter("title");
    String message = (String)request.getParameter("message");
    String datePosted = (String)request.getParameter("dateposted");
    String username = (String)request.getParameter("uName");
    String media = (String)request.getParameter("media");
    String type = (String)request.getParameter("type");
    String mediaSize = (String)request.getParameter("mediasize");

    // only username is a required value
    if(username == null || username.length() == 0) {

        out.println("Required parameter username is missing");
        return;
    }

    // now find out the working dir
    String workingDir = System.getProperty("user.dir");

```



```
// try to get to the user directory with the given username
// this assumes a specific working directory, change if you put files in
// different places
File userDir = new File(
    workingDir + "/webapps/MMAPI/deviceblog/users/" + username);

if(!userDir.exists()) {

    out.println("Internal error: no user directory");
    return;

}

// set the title if it is missing
if(title == null || title.equals("null") || title.length() == 0) {
    title = "Untitled " + (type == null ? "Text" : type) + " entry";
}

// try and figure out the date posted value
long datePostedLong = 0L;

if(datePosted == null) datePostedLong = System.currentTimeMillis();
else {
    try {
        datePostedLong = Long.parseLong(datePosted, 10);
    } catch (Exception e) {
        datePostedLong = System.currentTimeMillis();
    }
}

// now the file name for this entry will be based on the datePosted value
// but first create, if it doesn't exist, the entries directory for this user
// and also the media directories

File entriesDir = new File(userDir, "entries");

if(!entriesDir.exists()) {
    if(!entriesDir.mkdir()) {

        out.println("Internal error: could not create entries directory");
        return;

    } else {

        // entries directory created, now create the individual media directories
```

```

        new File(entriesDir, "audio").mkdir();
        new File(entriesDir, "video").mkdir();
        new File(entriesDir, "image").mkdir();

    }
}

// now see if this is a media entry, before saving the actual text entry
if(media != null) {

    // this is a media entry

    InputStream in = null;
    FileOutputStream fos = null;

    try {

        // open up an input stream for media data
        in = request.getInputStream();

        // create a byte array to receive this data in
        byte[] rcdData = new byte[new Integer(mediaSize).intValue()];

        // read from the input stream in this byte array
        in.read(rcdData);

        fos = new FileOutputStream(
            new File(entriesDir, type + "/" + datePostedLong + "." + media));

        fos.write(rcdData, 0, rcdData.length);
        fos.flush();

    } catch(IOException ioex) {

        out.println("Internal error: " + ioex.getMessage());
        return;
    } finally {

        try {
            if(fos != null) fos.close();
            if(in != null) in.close();
        } catch(IOException ix) { return; }

    }

}
}

```

```
// now save this entry
File entryFile = new File(entriesDir, datePostedLong + ".txt");

if(!entryFile.createNewFile()) {

    out.println("Internal error: could not create the entry file");
}

// now open this file, and write the title and message to it
FileWriter fw = null;
try {
    fw = new FileWriter(entryFile);

    // first the title
    fw.write(title, 0, title.length());
    fw.write("\r\n");

    // now the media file location, if any, if there is no media file,
    // still write an empty line
    if(media == null) fw.write("\r\n");
    else {
        fw.write(type + "/" + datePostedLong + "." + media);
        fw.write("\r\n");
    }

    // see if there is a message, if yes, write it
    if(message != null && !message.equals("null"))
        fw.write(message, 0, message.length());

    // flush the buffer
    fw.flush();

} catch(IOException ioex) {

    out.println("Internal error: " + ioex.getMessage());
    return;

} finally {

    if(fw != null) {
        try {
            fw.close();
        } catch(IOException io) { return; }
    }

}

out.println("Posted");
%>
```

The listing starts with identifying all the parameters in the request and throwing an error that says the required username is not found. It then proceeds to identify the users directory and create any missing ones. Finally, it checks to determine whether the request contains any media data and, if so, saves this in a specific media folder. The actual entry is saved in a date posted file that is also the name for the media file, if any.

The Web site for the blog lists the entries in the order that they are received, and this is done in the `index.jsp` file. This file, along with the `login.jsp` and `register.jsp` files, is in the source code available in the Downloads section of the Apress Web site.

Figure 9-23 shows the Device Blog server (<http://www.mmapibook.com/deviceblog/index.jsp>) as it looks at the moment!

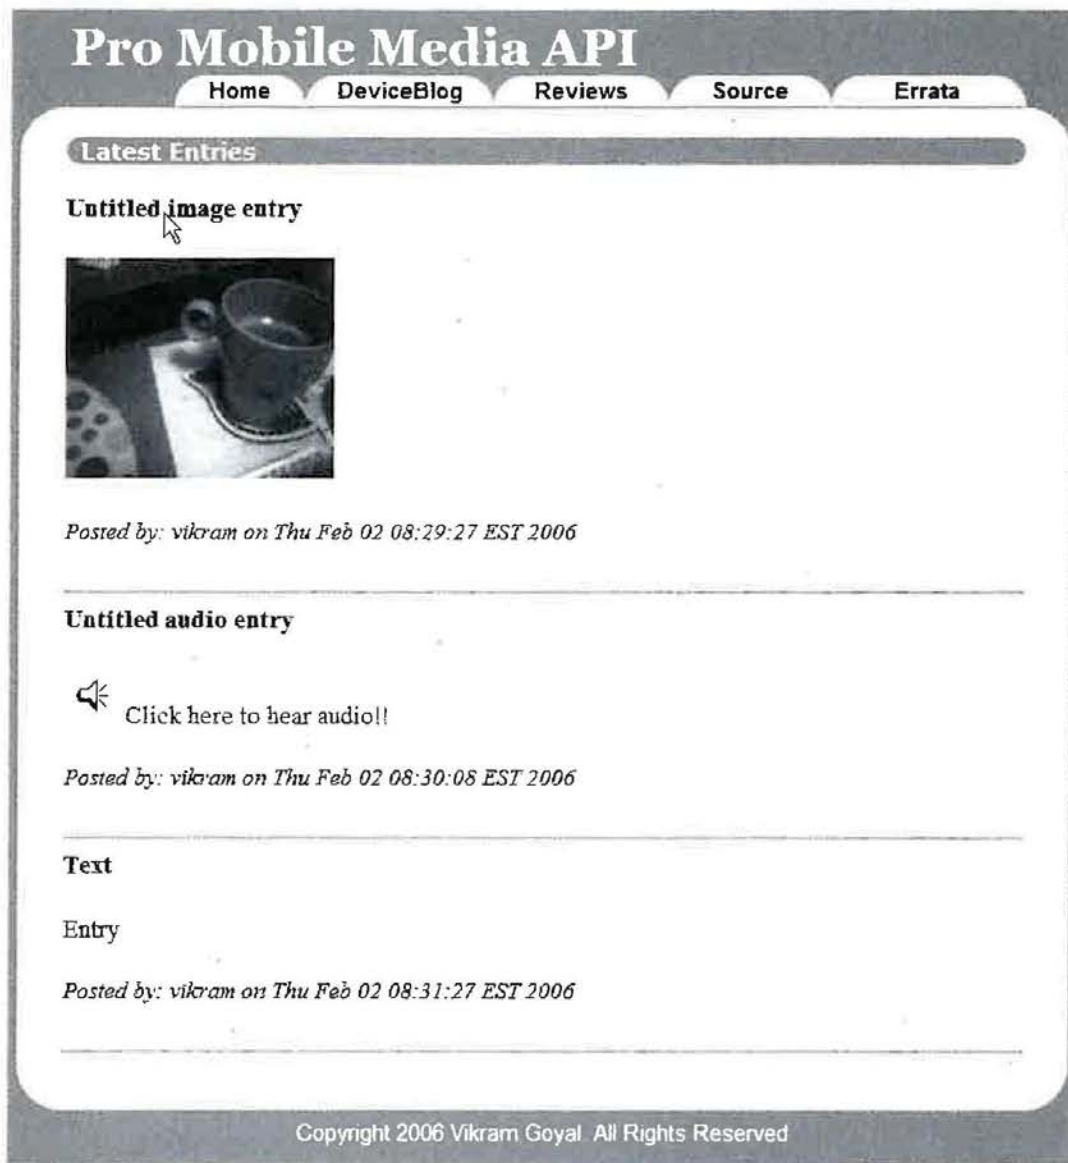


Figure 9-23. *The Device Blog in action!*

Summary

MMAPI is a terrific tool for building purposeful and multimedia-enabled rich applications. However, to make full use of MMAPI, you must know how it works and how it relates to the rest of the APIs in the MIDlet world.

This chapter has culminated the knowledge path that you started in Chapter 1. The Device Blog MIDlet application is a useable and functional application that showcases a thorough use of MMAPI. Device Blog shows that you can successfully integrate MMAPI with the rest of the Java ME API and build business and entertainment applications.

The Device Blog MIDlet application is not complete, however. It can be extended to include MIDI and Tone Blog entries, and the server side can be made more robust and scalable. However, that was not the aim of this case study. It has shown you the way, and you are invited to experiment with it. I look forward to your entries on the Device Blog server!

Mobile Media API (MMAPI) Reference

This appendix is a reference to the MMAPI. All classes, interfaces, and exceptions are listed here so that you can find them in one easy-to-use place. The Javadocs, however, remain the best place for getting detailed explanation about each method and class and is used in this appendix to take the one-line explanation of each class, interface, and exception.

This API is listed alphabetically, grouped by package.

Package javax.microedition.media

Interface Control

A Control object is used to control some media processing functions.

```
public interface Control {  
    // no methods  
}
```

Interface Controllable

Controllable provides an interface for obtaining the controls from an object such as a Player.

```
public interface Controllable {  
    // methods  
    public Control getControl(java.lang.String controlType);  
    public Control[] getControls();  
}
```

Class Manager

Manager is the access point for obtaining system-dependent resources such as Player instances for multimedia processing.

```
public final class Manager {
    // Constructors
    public static final java.lang.String MIDI_DEVICE_LOCATOR;
    public static final java.lang.String TONE_DEVICE_LOCATOR;

    // Methods
    public static Player createPlayer(java.lang.String locator)
        throws java.io.IOException, MediaException;
    public static Player createPlayer(
        java.io.InputStream stream, java.lang.String type)
        throws java.io.IOException, MediaException;
    public static Player createPlayer(DataSource source)
        throws java.io.IOException, MediaException;
    public static java.lang.String[] getSupportedContentTypes(
        java.lang.String protocol);
    public static java.lang.String[] getSupportedProtocols(
        java.lang.String content_type);
    public static TimeBase getSystemTimeBase();
    public static void playTone(int note, int duration, int volume)
        throws MediaException;
}
```

Class MediaException

A MediaException indicates an unexpected error condition in a method.

```
public class MediaException extends java.lang.Exception {
    // Constructors
    public MediaException();
    public MediaException(java.lang.String reason);
}
```

Interface Player

Player controls the rendering of time-based media data.

```
public interface Player extends Controllable {
    // Constants
    public static final int CLOSED;
    public static final int PREFETCHED;
    public static final int REALIZED;
    public static final int STARTED;
    public static final long TIME_UNKNOWN;
    public static final int UNREALIZED;
```


Interface TimeBase

A TimeBase is a constantly ticking source of time.

```
public interface TimeBase {  
    // Methods  
    public long getTime();  
}
```

Package javax.microedition.media.control

Interface FramePositioningControl

The FramePositioningControl is the interface to control precise positioning of a video frame for Player instances.

```
public interface FramePositioningControl extends Control {  
    // Methods  
    public long mapFrameToTime(int frameNumber);  
    public int mapTimeToFrame(long mediaTime);  
    public int seek(int frameNumber);  
    public int skip(int framesToSkip);  
}
```

Interface GUIControl

GUIControl extends Control and is defined for controls that provide GUI functionalities.

```
public interface GUIControl extends Control {  
    // Constants  
    public static final int USE_GUI_PRIMITIVE;  
  
    // Methods  
    public java.lang.Object initDisplayMode(int mode, java.lang.Object arg);  
}
```

Interface MetaDataControl

MetaDataControl is used to retrieve metadata information included within the media streams.

```
public interface MetaDataControl extends Control {  
    // Constants  
    public static final java.lang.String AUTHOR_KEY;  
    public static final java.lang.String COPYRIGHT_KEY;  
    public static final java.lang.String DATE_KEY;  
    public static final java.lang.String TITLE_KEY;
```

```
// Methods
public java.lang.String[] getKeys();
public java.lang.String getKeyValue(java.lang.String key);
}
```

Interface MIDIControl

MIDIControl provides access to MIDI rendering and transmitting devices.

```
public interface MIDIControl extends Control {
    // Constants
    public static final int CONTROL_CHANGE;
    public static final int NOTE_ON;

    // Methods
    public int[] getBankList(boolean custom) throws MediaException;
    public int getChannelVolume(int channel);
    public java.lang.String getKeyName(int bank, int prog, int key)
        throws MediaException;
    public int[] getProgram(int channel) throws MediaException;
    public int[] getProgramList(int bank) throws MediaException;
    public java.lang.String getProgramName(int bank, int prog) throws MediaException;
    public boolean isBankQuerySupported();
    public int longMidiEvent(byte[] data, int offset, int length);
    public void setChannelVolume(int channel, int volume);
    public void setProgram(int channel, int bank, int program);
    public void shortMidiEvent(int type, int data1, int data2);
}
```

Interface PitchControl

PitchControl raises or lowers the playback pitch of audio without changing the playback speed.

```
public interface PitchControl extends Control {
    // Methods
    public int getMaxPitch();
    public int getMinPitch();
    public int getPitch();
    public int setPitch(int millisemitones);
}
```

Interface RateControl

RateControl controls the playback rate of a Player instance.

```
public interface RateControl extends Control {
    // Methods
    public int getMaxRate();
    public int getMinRate();
}
```

```
    public int getRate();
    public int setRate(int millirate);
}
```

Interface RecordControl

RecordControl controls the recording of media from a Player instance.

```
public interface RecordControl extends Control {
    // Methods
    public void commit() throws java.io.IOException;
    public java.lang.String getContentType();
    public void reset() throws java.io.IOException;
    public void setRecordLocation(java.lang.String locator)
        throws java.io.IOException, MediaException;
    public int setRecordSizeLimit(int size) throws MediaException;
    public void setRecordStream(java.io.OutputStream stream);
    public void startRecord();
    public void stopRecord();
}
```

Interface StopTimeControl

StopTimeControl allows one to specify a preset stop time for a Player instance.

```
public interface StopTimeControl extends Control {
    // Constants
    public static final long RESET;

    // Methods
    public long getStopTime();
    public void setStopTime(long stopTime);
}
```

Interface TempoControl

TempoControl controls the tempo, in musical terms, of a song.

```
public interface TempoControl extends RateControl {
    // Methods
    public int getTempo();
    public int setTempo(int millitempo);
}
```

Interface ToneControl

ToneControl is the interface to enable playback of a user-defined monotonic tone sequence.

```
public interface ToneControl extends Control {
    // Constants
    public static final byte BLOCK_END;
    public static final byte BLOCK_START;
    public static final byte C4;
    public static final byte PLAY_BLOCK;
    public static final byte REPEAT;
    public static final byte RESOLUTION;
    public static final byte SET_VOLUME;
    public static final byte SILENCE;
    public static final byte TEMPO;
    public static final byte VERSION;

    // Methods
    public void setSequence(byte[] sequence);
}
```

Interface VideoControl

VideoControl controls the display of video.

```
public interface VideoControl extends GUIControl {
    // Constants
    public static final int USE_DIRECT_VIDEO;

    // Methods
    public int getDisplayHeight();
    public int getDisplayWidth();
    public int getDisplayX();
    public int getDisplayY();
    public byte[] getSnapshot(java.lang.String imageType) throws MediaException;
    public int getSourceHeight();
    public int getSourceWidth();
    public java.lang.Object initDisplayMode(int mode, java.lang.Object arg);
    public void setDisplayFullScreen(boolean fullScreenMode) throws MediaException;
    public void setDisplayLocation(int x, int y);
    public void setDisplaySize(int width, int height) throws MediaException;
    public void setVisible(boolean visible);
}
```


Interface VolumeControl

VolumeControl is an interface for manipulating the audio volume of a Player instance.

```
public interface VolumeControl extends Control {  
    // Methods  
    public int getLevel();  
    public boolean isMuted();  
    public int setLevel(int level);  
    public void setMute(boolean mute);  
}
```

Package javax.microedition.media.protocol

Class ContentDescriptor

A ContentDescriptor identifies media data containers.

```
public class ContentDescriptor {  
    // Constructors  
    public ContentDescriptor(java.lang.String contentType);  
  
    // Methods  
    public java.lang.String getContentType();  
}
```

Class DataSource

A DataSource is an abstraction for media protocol handlers.

```
public abstract class DataSource implements Controllable {  
    // Constructors  
    public DataSource(java.lang.String locator);  
  
    // Methods  
    public abstract void connect() throws java.io.IOException;  
    public abstract void disconnect();  
    public abstract java.lang.String getContentType();  
    public abstract java.lang.String getLocator();  
    public abstract SourceStream[] getStreams();  
    public abstract void start() throws java.io.IOException;  
    public abstract void stop() throws java.io.IOException;  
}
```

Interface SourceStream

Abstracts a single stream of media data.

```
public interface SourceStream extends Controllable {  
    // Constants  
    public static final int NOT_SEEKABLE;  
    public static final int RANDOM_ACCESSIBLE;  
    public static final int SEEKABLE_TO_START;  
  
    // Methods  
    public ContentDescriptor getContentDescriptor();  
    public long getContentLength();  
    public int getSeekType();  
    public int getTransferSize();  
    public int read(byte[] b, int off, int len) throws java.io.IOException;  
    public long seek(long where) throws java.io.IOException;  
    public long tell();  
}
```

URI Syntax for Media Locators

The Uniform Resource Identifier (URI) syntax is described using a Request For Comment (RFC) paper as a universal means of describing the location of different types and kinds of resources. The RFC in question is 2396 and its full text can be accessed at <http://www.ietf.org/rfc/rfc2396.txt>.

Essentially, this RFC defines a way for providing a uniform and consistent way of describing the location of different types of resources, wherever they may be located. This is important to us in MMAPI, because MMAPI, being protocol and format agnostic, requires consistent means to access resources.

URI defines two parts to each identifier string: the scheme part and the scheme specific part separated by a ':' as shown here:

```
<scheme>:<scheme-specific-part>
```

As it applies to MMAPI, the scheme part is the protocol over which the resource is being referenced, whereas the scheme-specific part is a hierarchical, location-specific string, which tells the system the exact physical location of the resource.

Not surprisingly, the most common example of this is when resources are accessed over the Internet using HTTP. As an example, <http://www.ietf.org/rfc/rfc2396.txt> consists of the scheme "http" and the scheme-specific part of "[//www.ietf.org/rfc/rfc2396.txt](http://www.ietf.org/rfc/rfc2396.txt)". The hierarchies in the scheme-specific parts are separated by the "/" character. Thus, [rfc2396.txt](http://www.ietf.org/rfc/rfc2396.txt) is a physical document located in the [rfc](http://www.ietf.org/rfc/rfc2396.txt) folder on the www.ietf.org server.

Of course, with MMAPI, the scheme part can be an entire range of options. As you have seen in this book, the scheme part can be any one of [capture](http://www.ietf.org/rfc/rfc2396.txt), [rtp](http://www.ietf.org/rfc/rfc2396.txt), [file](http://www.ietf.org/rfc/rfc2396.txt), [resource](http://www.ietf.org/rfc/rfc2396.txt), and, of course, [http](http://www.ietf.org/rfc/rfc2396.txt) strings.

With each scheme part, different options for the scheme-specific part can be set. For [capture](http://www.ietf.org/rfc/rfc2396.txt) scheme, you have used the [audio](http://www.ietf.org/rfc/rfc2396.txt) and [video](http://www.ietf.org/rfc/rfc2396.txt) scheme-specific parts. These can be further qualified to specify attributes, for example: [capture://audio?encoding=pcm](http://www.ietf.org/rfc/rfc2396.txt) would give you a specific URI for capturing WAV audio files.

Advanced Multimedia Supplements—JSR 234

The Java Community Process (JCP) at <http://www.jcp.org> defines new technology for the Java technology using a community process, whereby new specifications are released for public overview and debated on. Once approved, the specs are introduced in the Java language. One of the most prolific areas of technology development is Java ME, and new APIs are being constantly created and released to target this area of Java development.

Specifications are released with a Java Specification Request (JSR) number. MMAPI was released as JSR 135 (<http://www.jcp.org/en/jsr/detail?id=135>). However, this specification is now more than two years old, and newer advances in technology have necessitated an update. JSR 234 (<http://www.jcp.org/en/jsr/detail?id=234>), titled Advanced Multimedia Supplements, is a step in updating the MMAPI for new technology devices. The final release of this specification was in June 2005.

However, note that JSR 234 is a supplement to JSR 135. Thus, it doesn't replace MMAPI nor is it used on its own, but provides supplementary implementations for newer technology devices. This appendix gives you an overview of the new JSR.

Introduction to JSR 234

JSR 234 was initiated by a Nokia request to create an API that could provide richer experiences to users of mobile devices. Mobile devices are increasing in their processing power capacity, so this enables sophisticated media processing functionalities available to MIDlet developers and distributors. Specifically, better controls for camera, radio and audio, and sophisticated MIDlets created based on them is the target aim of this specification.

The specification creates a new package, `javax.microedition.amms`, where `amms` stands for Advanced Multimedia supplements. The specification mostly defines new controls that are derived from the `javax.microedition.media.control.Control` interface, thus making these controls compatible with MMAPI (as you would expect, as JSR 234 is a supplement to JSR 135). It also defines four new concepts in the main `javax.microedition.amms` package, `GlobalManager`, `Spectator`, `Module`, and `MediaProcessor`.

GlobalManager

`GlobalManager` is like a `Manager` class for JSR 234. It provides methods to retrieve the specialized objects present in this specification. However, it doesn't replace or extend the `Manager` class, and you still use the `Manager` class for creating and managing `Player` instances.

Spectator

The `Spectator` class represents a virtual listener. It provides acoustic controls that can help create MIDlet applications that mimic sound coming from different locations and areas. You can create a `Spectator` class by using the `getSpectator()` static method in the `GlobalManager` class. This class implements the `Controllable` interface, which allows it to provide implementation of the `getControl()` and the `getControls()` methods.

Module

The `Module` interface is a logical grouping of multiple `Player` instances and/or MIDI channels. This functionality was missing from MMAPI, where you can treat a group of such instances as one entity. This interface is extended by two subinterfaces, `EffectsModule` and `SoundSource3D`, which represent different types of groupings. `EffectsModule` represents `Player` instances and/or MIDI channels, to which a common effect can be applied, whereas `SoundSource3D` represents this group in a virtual acoustical space.

Modules can be fetched from the `GlobalManager` class using the `createEffectModule()` or the `createSoundSource3D()` methods. Note that the `Module` interface also implements the `Controllable` interface.

MediaProcessor

`MediaProcessor` is an interface for postprocessing of media data. A `MediaProcessor` works very much like a `Player` interface and defines various states that mimic it as well. A `MediaProcessor` instance can be in one of `UNREALIZED`, `REALIZED`, `STARTED`, or `STOPPED` states.

You can retrieve an instance of `MediaProcessor` by using the `GlobalManager` class's static method `createMediaProcessor(String type)`, passing to it the MIME type of target processor.

This interface also extends the `Controllable` interface.

Controls

The rest of the interfaces in this API are various controls and are divided in various packages depending on the type of functionality that they provide.

Package `javax.microedition.amms.control`

There are two main control interfaces in this package that impact the rest of the packages as well.

`FormatControl` is used for specifying the format of the various media types. This interface is implemented by four different types of media formats using their own interfaces: `AudioFormatControl`, `ContainerFormatControl`, `ImageFormatControl`, and `VideoFormatControl`.

`EffectControl` is used to preset a filter on some media data to provide different types of effects. This interface provides a method, `setEnabled(boolean enable)`, to turn the effects on or off. This interface is supported with the `EffectOrderControl` interface, which controls the order in which multiple effects are applied.

Finally, this package contains the interface `PanControl`, which controls the panning of audio and video media data, and `PriorityControl`, which allows the manipulation of the priority given to various `Player` instances in a group situation.

Packages `javax.microedition.amms.control.imageeffect` and `javax.microedition.amms.control.audioeffect`

All of the interfaces in these two packages extend the `EffectControl` interface and provide various effects that can be applied to audio and image media data.

Package `javax.microedition.amms.control.audio3d`

All of the interfaces in this package provide controls for manipulation of audio in a 3D environment. The controls are retrieved from either the `SoundSource3D` or `Spectator` class, as the case may be.

Package `javax.microedition.amms.control.camera`

The controls in this package are retrieved from a `Player` instance that is created by using the `Manager.createPlayer("capture://camera")` method. These controls provide control over the exposure, the flash, focus, zoom, and burst shooting of snapshots (as opposed to single snapshots using the `getSnapshot()` method of the `VideoControl` interface provided in MMAPI). A `CameraControl` control provides further control over the camera by providing methods for shutter control, camera rotation, and so on.

Package `javax.microedition.amms.control.tuner`

This package contains two control interfaces for radio tuning. `RDSControl` is used for Radio Data System (RDS) tuning and provides methods to manage that. `TunerControl` isn't specifically targeted for radio tuning, but it can be used to tune into any `Player` instance that supports tuning, however unlikely.

JSR 234 Implementations

At this point, being a relatively new API, there are no known implementations on any devices, and neither is there any known emulator support. However, Nokia provides a reference implementation with some examples, which can be downloaded at <http://forum.nokia.com/java/jsr234>.

Index

Numbers and symbols

- # sign, used to denote a sharp, 76
- 3rd Generation Participation Project (3GPP), Adaptive Multi-Rate (AMR) format standard adapted by, 134

A

- Adaptive Multi-Rate (AMR) format, standard adapted by the 3rd Generation Participation Project (3GPP), 134
- addPlayerListener(PlayerListener listener) method, using to register an implementation with a Player instance, 47
- Advanced Multimedia supplements (JSR 234), 251–253
- After-Touch message, function of, 100
- AMR format. *See* Adaptive Multi-Rate (AMR) format
- AMR-Narrow Band (AMR-NB) format. *See* Adaptive Multi-Rate (AMR) format
- AMR-Wide Band (AMR-WB) format. *See also* Adaptive Multi-Rate (AMR) format for higher speech quality of sampled audio, 134
- AMS (Application Management Software). *See also* Application Management Software (AMS)
 - halts installation if unable to put MIDlet in a trusted domain, 65–66
- applause.wav, playing in Motorola C975 emulator, 23
- Apple's Darwin streaming server, Web site address for, 182
- Application Management Software (AMS), 29
- Apress Web site, for source code downloads, 180, 202
- audio
 - capturing, 146–162
 - getting user permission before recording to the Device Blog, 190–191
 - saving captured, 158–162
 - timed capture and playback, 147–151
 - audio and tone generation, MMAPi support for, 2
 - audio and video, working with, 127–184
- AudioBlogEntry, in Device Blog MIDlet application, 193

- AudioEditCanvas class, used as the editable canvas for audio recording, 216–220
- AudioPlayer MIDlet
 - code for creating AudioPlayerCanvas, 27–29
 - examples in operation showing list of audio files, 22–23
- AudioPlayerCanvas
 - code for creating, 27–29
 - improving by caching Player instances, 29–36
 - interface for playing audio files, 23–26
 - modifying to CachedAudioPlayerCanvas, 30–33

B

- b, used to denote a flat, 76
- baby.wav
 - playing in Sun's DefaultColorPhone emulator, 23
 - table showing time taken to play back with caching of Player instances, 36
 - table showing time taken to start playback of across three devices, 30
- bank (or soundbank). *See also* soundbanks used to support more instruments than General MIDI specification allows, 102
- bar (segment of time), using a time signature to define beats in each, 82
- basic controls, MMAPi support for, 2
- BBC's live radio broadcast, Web site address for, 182
- Beginning J2ME: From Novice to Professional*, Third Edition, by Jonathan Knudsen and Sing Li (Apress, 2005), 3, 17
- BenQ (formerly Siemens) CX 75 emulator, Web site address for downloading, 3
- BenQ M75 emulator and device
 - capturing and previewing images and video on, 192
 - example of MMAPi capabilities in, 131
 - looking through the viewfinder in, 178
 - starting the Device Blog MIDlet on, 186
 - storing captured audio on, 162
 - table of properties supported by, 131
- BLOCK_END constant, for marking the end of a block, 87

BLOCK_START constant, for marking the start of a block, 87

blog editing classes, defining in the Device Blog MIDlet application, 196

blog entries, creating view for editing and previewing, 195

BlogEntry interface

- for all types of blog entries, 199
- code for handling user selection of type of, 231–232
- in Device Blog MIDlet application, 193

blogging. *See also* Case Study: Device Blogging

- building a mobile blogging MIDlet called Device Blog, 185–237

BlogServer class

- as a container for the blog server, 204
- BootstrapMIDlet or Controller class responsible for creating, 205
- in Device Blog MIDlet application, 194

BootstrapMIDlet class

- code for creating, 227–230
- control class of the Device Blog MIDlet application, 197–198

bpm (beats per minute), using TempoControl to set, 107–108

byte array, specifying notes you want played in any sequence you want in, 81

C

CachingAudioPlayerCanvas class, enabling event handling in, 53–55

camera viewfinder, looking through, 174–178

Canvas, code for displaying video in, 164–168

CapabilitiesMIDlet, code for listing capabilities of a MMAPI implementation, 128–129

captured audio, saving, 158–162

Case Study: Device Blogging, 185–237

channel, changing program and volume of, 115

Channel messages

- how they are differentiated from System messages, 98
- Voice or Mode Channel subclasses of, 97

Channel Pressure message, function of, 101

CLDC. *See* Connected Limited Device Configuration (CLDC)

cleanUp() method, for closing each Player instance after it is no longer required, 27

close() method

- actions to be performed when calling during different states, 46
- for releasing any resources held by the player, 27
- in a simple linear transition path for a Player instance, 40

closeAll() method, to shut down all Player instances, 34

CLOSED state

- of Player instance, 39
- Player instance in, 46

code example

- for adding the keyPressed(int keyCode) method to the CaptureVideoCanvas class, 179
- AudioEditCanvas used as the editable canvas for audio recording, 216–220
- AudioPlayer MIDlet creates AudioPlayerCanvas, 27–29
- for AudioPlayerCanvas—an interface for playing audio files, 23–26
- for BlogEntry interface for all types of blog entries, 199
- for BlogServer class acting as a container for the blog server, 204
- for the BootstrapMIDlet class for starting the Device Blog MIDlet, 227–230
- of a byte array for playing the first two stanzas of “Happy Birthday to You”, 87
- CachedAudioPlayerCanvas caches Player instances, 30–33
- CachingAudioPlayer uses the new CachedAudioPlayerCanvas, 34–36
- for CapabilitiesMIDlet for listing capabilities of a MMAPI implementation, 128–129
- for changing volume of a channel, 117
- for a class to create a binary JTS file from a hex representation, 89–91
- for controlling audio capture, 151–157
- controlling MIDI with pitch, tempo, and volume controls, 104–107
- converting EventHandler to use reference checking instead of object equality, 56–57
- for creating a standalone MIDI Player instance, 113
- for creating EditableDisplay as base interface for all editable objects, 211
- for custom encodings that allow you to create your own encodings, 133
- for displaying video in a Form or a Canvas, 164–168
- EchoEventsMIDlet echoes player events onscreen, 47–48
- EditCanvas class used as the base class to create editable canvases, 215–216
- for EditForm class to implement EditableDisplay interface, 211–213
- for enabling event handling in the CachingAudioPlayerCanvas class, 53–55
- EventHandler class, 51–52

- for first stanza of "Happy Birthday to You", 87
- general format for each type of encoding string, 132
- for handling user selection of type of BlogEntry, 231–232
- of HTTP for accessing files, 8
- for ImagePreviewCanvas showing associated image to user as a preview, 223–224
- loading and playing JTS file from a JAR file, 91–92
- looking through a camera's viewfinder and displaying onscreen, 174–177
- MediaBlogEntry class representing blog entries that have a media component, 200–201
- MIDICapabilitiesMIDlet for providing information about MIDIControl's capabilities, 113–114
- MIDlet for timed capture and playback of audio, 148–151
- of MIDlet that plays all notes from 0 to 127 sequentially, 79–80
- for mixed encoding, 132
- mixing MIDI and sampled audio, 143–146
- modifying `commandAction()` method to find time taken to play an audio file, 30
- for modifying the JAD manifest file for the NetworkTest MIDlet, 65
- moving video in vertical space and muting volume, 169–173
- NetworkPlayerManager class implementing the Runnable interface, 69–70
- NetworkRunner is a single-threaded HTTPConnection class, 205–209
- of permission needed to record any media (audio or video), 147
- for playing a local MIDI file, 102–103
- for playing an audio file over the network, 63–64
- for playing C# for 5 seconds at max volume, 76–77
- for playing tone sequences, 88
- `postEntry(BlogEntry entry)` method of the Controller class, 230–231
- of `postentry.jsp` file, 232–235
- for PreviewCanvas abstract class, 221–223
- ProgramNamesMIDlet queries soundbanks/programs and plays notes, 121–124
- RateControllableMIDIMIDlet controls playback rate, 110–112
- for sending MIDI message commands, 116
- of the `shortMidiEvent()` method in action, 118–120

- a simple Java class to calculate note frequencies and int values, 77–78
- for a simple MMAPi MIDlet, 19–20
- specifying the encoding formats for `audio.encodings` property, 132
- StopTimeControlMIDlet allows you to play with the StopTimeControl, 135–138
- for storing and retrieving captured audio, 159–161
- streaming media over the network, 182–183
- TextBlogEntry class representing all entries that have a textual component, 199–200
- TextEditForm used to create editable form screens for text blog entries, 213–214
- that allows the user to start and stop recording video clips, 180
- ThreadedMIDlet creates a new thread to play back a media file, 67–69
- understanding threads in MIDlets, 60–61
- for the URLEncoder class, 209–211
- User class represents the user of the Device Blog MIDlet, 202–204
- using MetadataControl to display meta information, 139–141
- using RingToneConverter class to convert RTTTL to MMAPi format, 84–86
- using the `BLOCK_END` constant, 87
- using the `BLOCK_START` constant, 87
- using the `PLAY_BLOCK` constant, 87
- using the ToneControl interface for creating a tone sequence to play, 83–84
- video capture formats supported by Sun's DefaultColorPhone emulator, 132
- VideoBlogEntry extends MediaBlogEntry and represents video blog entries, 202
- for the VideoPreviewCanvas that previews the video to the user, 225–227
- `commandAction()` method
 - function of for displaying video, 168
 - modifying to find time taken to play one of the audio files, 29–30
- common time, defined, 82
- Connected Limited Device Configuration (CLDC), 2
- ContentDescriptor class, in `javax.microedition.media.protocol` package, 246
- Control Change message, function of, 100
- Control Change messages, table of values, 117
- control classes, creating, 227–232

- Control object, in javax.microedition.media package, 239
- Control objects, that provide control over the functionality of a Player, 13–14
- Controllable interface, in
 - javax.microedition.media package, 239
- ControllableMIDIMIDlet, running to control pitch, tempo, and volume, 104
- controlled capture and playback, of audio, 151–157
- Controller class, of the Device Blog MIDlet application, 197–198
- CreateJTSFileFromHexString class, for creating a binary JTS file, 89–91
- createPlayer() methods, provided by
 - Manager class, 10
- createPlayer(DataSource source) method, 10
- createPlayer(InputStream is, String type) method, 10
- createPlayer(String locator) method, 10
- custom encodings, code example for, 133
- custom events, handling, 55–57

D

- DataSource class
 - basics, 8–9
 - function of, 7
 - in javax.microedition.media.protocol package, 246
- DataSource instance, creation of, 8
- deallocate() method, attempting to call on the Player instance, 41
- Device Blog MIDlet application
 - building, 185–237
 - bundling together common functionalities of a List in, 194
 - companion Web site, 185
 - control classes of, 198
 - creating a text-only entry for, 189
 - creating the code for, 198–235
 - creating the design for, 192–198
 - defining the blog editing set of classes in, 196
 - defining the blog preview set of classes, 197
 - the finished in action, 185–192
 - getting permission from the user for recording audio, 190–191
 - image recording on, 191–192
 - preview of the text-only blog entry, 189
 - starting, 186
 - Unified Modeling Language (UML) model for, 193
 - URL for posting entries to, 190
 - views in, 194–197
- Device Blog server, in action, 236

- Device Blog Web site
 - creating and posting entries to, 188–192
 - logging in to, 187–188
 - registering with, 186–187
 - selecting the entry type for posting to, 188
 - successful login to, 188
- device capabilities, MMAPi support for
 - discovery of, 2
- devices, querying the capabilities of, 127–133
- Digital Rights Management (DRM), of digital data, 42
- digitally recorded audio data. *See* sampled audio
- DistributedToneMIDlet, code that will load and play the happybdy_hex.jts file, 91–92
- DRM. *See* Digital Rights Management (DRM)
- dumpSequence() method, provided by the RingToneConverter, 89
- duration
 - calculating using resolution and tempo, 82–83
 - using with playTone() method, 79–81

E

- EchoEventsMIDlet, example that echoes player events onscreen, 47–48
- EditableDisplay interface
 - code for creating, 195, 211–227
- EditCanvas class
 - providing the base class for editing media blog entries, 196
 - used as the base class to create editable canvases, 215–216
- EditForm class
 - for implementing the EditableDisplay interface, 211–213
 - provides the base class for editing textual blog entries, 196
- EffectControl interface, function of in javax.microedition.amms.control package, 253
- emulators, running ControllableMIDIMIDlet to control pitch, tempo, and volume, 104
- encoding formats, supported by Sun's DefaultColorPhone emulator, 132
- encoding strings. *See also* media encoding strings
 - types of, 132
- endofmedia event, delivered when no more media is left to play (or record/stream), 48
- event delivery mechanism, understanding in MMAPi, 50–51
- event handling class, creating, 51–55

event messages

- giving them time to process, 118–120
- sending short and long, 115

eventData

- function of when a particular event is fired, 49
- table of events and corresponding event data, 50

EventHandler class

- code for, 51–52
- converting to use reference checking instead of object equality, 56–57

events, and corresponding event data, 50

exceptions thrown, when playing a media file using MMAPI, 21–22

F

feature set, defined, 15

FileConnection API (JSR-75), using to store data on a device, 158

filename extensions

- for Java Tone sequence files, 89
- for MIDI Player based on a physical file, 11
- for SMF files distributed on the Internet, 101
- for Standard MIDI file format, 101
- for a tone Player instance, 11

files

- example of HTTP for accessing, 8
- playing tone sequences stored in, 91–92

flat, defined, 75–76

Form

- bundling together common functionalities of, 195
- code for displaying video in, 164–168

FormatControl interface, in

- `javax.microedition.amms.control` package, 252

formula

- for calculating tone duration using resolution and tempo, 82–83
- for SEMITONE_CONST, 76
- using a MMAPI to calculate note values, 76–78

FramePositioningControl

- in `javax.microedition.media.control` package, 242
- methods to convert media time to frame numbers, 181
- seeking video frames with, 181
- for video data that allows access to individual frames, 13

frames. *See* video framesfrequency. *See* note, pitch, and frequency**G**

Gauge item, for controlling volume and volume level reflected on screen, 23

General MIDI (GM) specification, core features and function of, 101–102

GenericForm class, bundling together common functionalities of a Form in, 194

GenericList class, in Device Blog MIDlet application, 194

getBankList(boolean custom) method, for getting a list of all installed soundbanks, 114

getBankList(false) method, for getting a list of all soundbanks, 124–125

getControl("VolumeControl"), retrieving the VolumeControl with, 52

getDateTimePosted() method, 200

getKeyName(int bank, int program, int key) method, for getting the name of the device-assigned name of a key, 115

getKeys() method, for getting a list of keys, 141

getKeyValue() method, for getting the value assigned to each key, 141

getMaxRate() method, for querying for the maximum playback rate, 109

getMinRate() method, for querying for the minimum playback rate, 109

getName() method, must be a CLDC 1.1 method for the Thread class, 60–62

getPitch() method, using to query for the pitch value in milli-semitones, 108

getProgramList(int channel) method, for getting the current instrument/program assigned to a given channel, 115

getProgramList(selectedBank) method, using to display the programs installed on a soundbank, 125

getProgramName(int bank, int prog) method, for getting the name of an instrument/program, 115

getProgramName(selectedBank, programs[i]), null) method, using to display the programs installed on a soundbank, 125

getRate() method, using to get the current playback rate of a musical piece, 109

getSeekType() method, function of, 8

getSnapshot() method

- taking a snapshot of an image that is playing on a device screen with, 174
- using to take snapshots, 178–179

getState() method, determining the current state of a Player instance with, 40

`getStopTime()` method, returning the preset time with, 139
`getSupportedContentProtocols(String contentType)` method, for getting protocols over which it can be accessed, 11
`getSupportedContentTypes(null)` method, for getting the supported formats for all media types, 163–181
`getSupportedContentTypes(String protocol)` method, for a list of all supported content types for a particular protocol, 11
`getTimeBase()` method, accessing built in default `TimeBase` instance with, 9
`getTransferSize()` method, function of, 8
`GlobalManager`, function of, 252
`guessFileExtension()` method, 202
`GUIControl`
 for data that requires a display, 13
 in `javax.microedition.media.control` package, 242

H

half step. *See* semitone
 Helix streaming server, Web site address for, 182
 HTTP access, code for modifying the JAD manifest file for, 65
 HTTP/HTTPS access, required permissions for, 17
 HTTPS access, code for modifying the JAD manifest file for, 65

I

`IllegalStateException`
 thrown by `realize()` method, 42
 thrown if calling `start()` on an instance that is in the `CLOSED` state, 44
 thrown if `prefetch()` is called on a `CLOSED` instance, 43
`ImageBlogEntry`, in Device Blog MIDlet application, 193
`ImagePreviewCanvas`, showing the associated image as a preview, 223–224
 images, recording on Motorola C975 and BenQ M75 devices, 191–192
`initDisplayMode(int mode, Object arg)` method, providing basis on which video is displayed, 163
 Interactive MIDI feature set, function of, 15–16
`isBankQuerySupported()` method
 for finding whether a full or minimum `MIDControl` is available, 120
 function of, 114–115

`itemStateChanged(Item item)` method
 using to raise the pitch value, 108

J

Java Community Process (JCP), Web site address for, 5, 251
 Java ME
 JVM in vs. JVM in Java SE, 59
 understanding threads in, 59–63
 Java ME development environment, showing `MMAPI` as an optional package, 4
 Java ME games, mixing sampled audio, MIDI, and/or tones in, 142
 Java Micro Edition (ME) platform, optional packages for developing applications for, 3–4
 Java SE, JVM in vs. JVM in Java ME, 59
 Java Specification Requests (JSR) 135, introduction of Mobile Media API (`MMAPI`) via, 1
 Java Tone Sequence files, filename extension for, 89
 Java Verified Program, Web site address for details about, 67
 Java Wireless Toolkit
 reference implementation of `MMAPI` installed with, 3
 Web site address for downloading, 3
 Java-enabled devices, using `MMAPI` to create applications for, 1–2
 Java-enabled mobile phones, `MMAPI` features and requirements for, 2
`javax.microedition.amms` package, new concepts defined in, 251–253
`javax.microedition.amms.control` package, control interfaces in, 252–253
 `audio3d` package, 253
 `audioeffect` package, 253
 `camera` package, 253
 `imageeffect` package, 253
 `tuner` package, 253
`javax.microedition.media` package
 alphabetical reference, 239–242
 Player interface defined in, 7
`javax.microedition.media.control` package, alphabetical reference, 242–246
`javax.microedition.media.control.Control` interface, new controls derived from, 251–253
`javax.microedition.media.protocol` package
 alphabetical reference, 246–247
 `DataSource` class defined in, 7
 JCP specification 135, development of by Sun, Nokia, and Beatrik, 5
 JSR 135, `MMAPI` released as, 251

JSR 234

- implementations, Nokia Web site address for reference implementation samples, 253
- introduction to for mobile devices, 251–253
- .jts filename extension, for Java Tone Sequence files, 11, 89
- jts files, creating, 89–91

K

- .kar or .mid filename extension, for MIDI Player based on a physical file, 11
- keyPressed(int keyCode) method, adding to the CaptureVideoCanvas Class, 179
- Knudsen, Jonathan and Sing Li, *Beginning J2ME: From Novice to Professional*, Third Edition by, 3, 17

L

- laughter.wav, playing in Motorola C975 device, 23
- LCDUI Image class, for manipulating image data, 174
- Li, Sing and Jonathan Knudsen, *Beginning J2ME: From Novice to Professional*, Third Edition by, 3, 17
- listRoots() method, for finding the root folder of a device, 158
- loadVideo() method, for displaying video, 168
- long MIDI event message, sending, 115
- longMidiEvent(byte[] data, int offset, int length) method, for sending System Exclusive messages, 115

M

- Manager class
 - as bridge between a DataSource and a Player, 10
 - in javax.microedition.media package, 240
 - scaled-down version of in the MIDP 2.0 subset of MMAPI, 14–15
 - static method to play single tones provided by, 11
 - understanding, 9–12
 - using to create Player instances in MMAPI, 10
- mapFrameToTime(int framenum) method, for converting frame numbers to media time, 181
- mapTimeToFrame(long mediaTime) method, for converting media time to frame numbers, 181
- media, accessing over the network, 59–71
- media encoding strings. *See also* encoding strings
 - for specifying the format of media supported/desired for operations, 132–133

- media encodings
 - understanding, 132–133
 - using for mixed formats, 132
- media locators, URI syntax for, 249
- media player, lifecycle and events, 39–58
- media types, MMAPI support for
 - multiple, 2
- MediaBlogEntry class
 - in Device Blog MIDlet application, 193
 - representing blog entries that have a media component, 200–201
- MediaException
 - thrown by realize() method, 42
 - thrown if an error occurs when processing media for playback, 44
 - thrown if an error occurs when processing or decoding media data, 43
- MediaException class, in
 - javax.microedition.media package, 240
- MediaProcessor interface, function of, 252
- MetaDataControl
 - gathering information using, 139–141
 - in javax.microedition.media.control package, 242–243
 - predefined keys in, 141
 - used to determine metadata information stored within a media stream, 13
 - using to display meta information on Motorola C975 device, 141
- .mid filename extension, for SMF files distributed on the Internet, 101
- .mid or .kar filename extension, for MIDI Player based on a physical file, 11
- Middle C (equal to 60), example for composing, 100
- MIDI (Musical Instrument Digital Interface)
 - managing using MIDIControl, TempoControl and PitchControl, 95–125
 - playing without MIDIControl, 102–112
 - understanding, 95–102
 - using in MMAPI, 102–125
- MIDI and tone Player constants, table of, 11
- MIDI communication, illustration of, 96
- MIDI feature set, function of, 15
- MIDI files
 - controlling the pitch, tempo, and volume of, 104–109
 - playing, 102–103
- MIDI message format
 - function of, 97–99
 - illustration of standard, 97
- MIDI messages
 - classifications of, 98
 - sending simple, 116–120

- storing and distributing, 101–102
- table showing how to spot the different messages, 98–99
- types of, 97
- MIDI mixing, implemented by Motorola C975 device, 142
- MIDI Player instance, creating a standalone, 113
- MIDI sequences, varying the speed of playback of, 107–108
- MIDI sounds, creating, 11
- MIDI specification
 - first published in 1982, 95
 - understanding, 96–101
- MIDICapabilitiesMIDlet, for providing information about MIDIControl's capabilities, 113–114
- MIDIControl
 - in javax.microedition.media.control package, 243
 - Motorola C975 emulator support for a full, 120
 - playing MIDI with, 113–125
 - playing MIDI without, 102–112
 - querying for capabilities, 113–115
 - that enables access to a device's MIDI player, 13
- MIDlets
 - embedding multimedia capabilities in, 1
 - MIDP 2.0 as profile for the development of, 3–4
 - sources multimedia data can be received from, 7
- MIDP. *See* Mobile Information Device Profile (MIDP)
- MIDP 2.0, how MMAPI fits with, 3–4
- MIDP 2.0 subset, table of MMAPI subset features, 14–15
- mixed encoding, code example for, 132
- MMAPI. *See also* Mobile Media API (MMAPI)
 - example of BenQ M75 emulator and device MMAPI capabilities, 131
 - feature set implementations, 15–16
 - getting started with, 19–37
 - how it fits with MIDP 2.0, 3–4
 - issues required to look at for using across a network, 67
 - as an optional package for Java Micro Edition (ME) platform, 3–4
 - specification 135, 5
 - table of devices that support as an optional package, 5
 - table of exceptions thrown playing a media file using, 21–22
 - table of system properties, 128
 - understanding the event delivery mechanism in, 50–51
 - using MIDI in, 102–125
 - MMAPI architecture, how it achieves platform and format neutrality, 7–17
 - MMAPI controls, table of standard, 13
 - MMAPI development, permissions that are interesting for, 63
 - MMAPI format, converting RTTTL to, 84–86
 - MMAPI formula
 - based on the frequency of desired note to be played as a tone, 76
 - for SEMITONE_CONST, 76
 - using to calculate note values, 76–78
 - MMAPI implementations, supported protocols and content types, 11–12
 - MMAPI MIDlets, creating, 19–37
 - MMAPI system properties, table of, 128
 - mobile blogging. *See also* blogging; Case Study: Device Blogging; Device Blog
 - Mobile Information Device Profile (MIDP) 2.0, 1
 - Mobile Media API (MMAPI). *See also* MMAPI
 - defined, 1–2
 - downloading implementation of supplied by Nokia, 3
 - features and requirements, 2
 - getting, 3
 - introduction to, 1–6
 - reference, 239–247
 - Mode Channel messages, function of, 98
 - model classes, creating for the Device Blog MIDlet application, 198–205
 - Model-View-Controller (MVC) pattern, using to create the Device Blog MIDlet design, 192–198
 - Module interface, function of, 252
 - monophonic ring tones, defined, 73
 - Motorola C975 device
 - audio/amr and audio/amr-wb formats supported by, 146
 - controlled audio recording MIDlet in action on, 157
 - example of MMAPI capabilities in, 130
 - image recording on, 191
 - lack of video recording support in, 188
 - looking through the viewfinder in, 178
 - MIDI mixing implemented by, 142
 - mixing MIDI and audio in, 146
 - moving video around and muting audio, 173
 - recording and previewing audio on, 191
 - starting the Device Blog MIDlet on, 186
 - video playback on a Canvas on, 169
 - Motorola C975 emulator
 - example of installed banks and programs on, 121
 - example of MMAPI capabilities in, 130
 - example of RateControllableMIDIMIDlet running on, 112

- lack of TempoControl working in, 109
- running ControllableMIDIMIDlet to control pitch, tempo, and volume, 104
- running StopTimeControlMIDlet in, 135
- screen and console output for the ThreadTest MIDlet on, 62
- testing the NetworkTest MIDlet in, 67
- Motorola SDK V5.2, Web site address for downloading, 3
- multimedia capability, provided by Player and DataSource, 8
- multimedia player, building a simple, 19–22
- Musical Instrument Digital Interface (MIDI). *See* MIDI (Musical Instrument Digital Interface)
- Musical Instrument Digital Interface (MIDI) sounds, creating, 11

N

- Netbeans Integrated Development Environment (IDE), Web site address for, 3
- network
 - accessing media over, 59–71
 - code for playing an audio file over, 63–64
- network access
 - granting permissions for, 65
 - of a media file using a separate thread over Sun and Motorola emulators, 71
 - understanding permissions for, 63–67
- NetworkPlayerManager class, using to create a new thread, 67–69
- NetworkRunner class
 - code for, 205–209
 - function of, 198
- NetworkTest MIDlet, 65
- Note OFF message, function of, 100
- Note ON message, function of, 100
- note parameter, formula based on the frequency of desired note to be played as a tone, 76
- note, pitch, and frequency
 - table of frequency values for the basic notes, 74
 - understanding, 74–76
- note values
 - table of integer for the basic notes, 78
 - using a MMAPI formula to calculate, 76–78
- notes
 - defined, 73
 - specifying duration of using resolution, 82
 - table of frequency values for the basic, 74
 - table of integer values for the basic, 78

O

- object equality check, using to catch standard events in `playerUpdate()` method, 56
- octaves, 74–75
- OK command handler, for the AudioEditCanvas, 220

P

- `pauseMedia()` method, for pausing the Player instance, 26
- PCM (Pulse Code Manipulation), supported by Sun's DefaultColorPhone emulator, 132
- permissions, understanding for media access over the network, 63–67
- pitch. *See* note, pitch, and frequency
- Pitch Bend message, function of, 101
- PitchControl
 - for controlling the pitch (frequency) of audio data, 13
 - how it works, 108–109
 - in `javax.microedition.media.control` package, 243
 - using for simple changes, 102
- PLAY_BLOCK constant, using followed by the number identifying the block, 87
- player events, responding to, 47–57
- Player instances
 - creating for MIDI and tone sounds, 11
 - creating functional, 22–36
 - creating to play a MIDI file, 102–103
 - EchoEventsMIDlet acting as a listener for, 48
 - exploring the different states, 39–46
 - lifecycle and events, 39–58
 - methods for making usable, 40–41
 - overview of states it goes through during its lifetime, 39
 - resetting the TimeBase for, 9
 - to start playing the media file, 21
 - synchronizing two that use the same TimeBase, 9
 - using methods of the Manager class to create, 10
- Player interface
 - basics for playing and managing multimedia data, 9
 - function of, 7
 - in `javax.microedition.media` package, 240–241
- PlayerListener interface
 - implementing to receive notification of asynchronous events, 9
 - in `javax.microedition.media` package, 241
 - for responding to player events, 47–57
 - table of player events and when they are fired defined in, 49

Players and DataSources, understanding, 7–9

playerUpdate() method

- parameters taken by, 49
- using object equality check for catching standard events in, 56

playerUpdate(Player player, String event, Object eventData) method, invoking, 47

playMedia(String locator) method, function of, 26

playTone() method

- exceptions that can be thrown by, 81
- using, 79–81

playTone(int note, int duration, int volume) method

- provided by Manager class to play single tones, 11
- using to play a single note, 76

polyphonic ring tones, 73–74

- MIDI specification based on, 96

postEntry(BlogEntry entry) method, code for, 230–231

postentry.jsp file, 232–235

prefetch() method

- in a simple linear transition path for a Player instance, 40
- using instead of realize() method for quicker media playback startup, 34

PREFETCHED state

- function of, 43–44
- of Player instance, 39
- possible transitions, 44

PreviewCanvas abstract class

- as base abstract class for all preview canvases, 221–223
- providing commands to view the Device Blog MIDlet, 197

Program Change messages

- for changing the current instrument/program assigned to a channel, 117–118
- function of, 101

Q

quantization (or resolution), as measurement of sampled audio, 133

R

RateControl

- differentiating between it and TempoControl, 109–112
- in javax.microedition.media.control package, 243–244
- used to control the playback rate of a Player, 13
- using instead of TempoControl, 109

Real-time Transport Protocol (RTP), 181

realize() method

- exceptions thrown by, 42
- function of, 34
- in a simple linear transition path for a Player instance, 39–40

REALIZED state

- of Player instance, 39
- transitions, 41–42

RealTime Server, Web site address for, 182

RecordControl

- for controlling the recording of data from a capture device, 13

- in javax.microedition.media.control package, 244

- methods for setting the location of recorded data, 147

- using to capture media, 146

reference equality check, using to catch custom events in playerUpdate() method, 56

reference implementation (RI), of MMAPi, 3

removePlayerListener(PlayerListener listener) method, using to remove an instance, 47

RESET constant, removing a previously set preset time with, 139

resolution, using to specify duration of each note, 82

resource protocol, for creating a locator for a media file, 21

restartMedia() method, for restarting the Player instance, 26

ring tone, as example of synthetic tones, 73

Ringing Tone Text Transfer Language (RTTTL) format, converting to MMAPi format, 84–86

RingToneConverter class, using to convert RTTTL to MMAPi format, 84–86

rtc.dumpSequence() method, using to print the sequence on the standard out, 89

RTTTL format. *See* Ringing Tone Text Transfer Language (RTTTL) format

Run via OTA option, for testing the MIDlet after it is signed in Sun Java ME emulator, 66–67

Runnable interface, implemented by the NetworkPlayerManager class, 69–70

S

sampled audio

- a brief overview of, 133–134

- code for mixing MIDI and, 143–146

- controlling, 134–141

- mixing with MIDI and tones, 142–146

- storing, 133–134

sampled audio feature set, function of, 15

- sampling rate, as measurement of sampled audio, 133
- Scalable Polyphony MIDI (SP-MIDI), mobile phone ring tones based on, 96
- security architecture, of devices using MMAPi, 16–17
- security conscious methods, table of classes/interfaces and permissions required, 16
- SecurityException
 - reason it is thrown by the realize() method, 42–43
 - thrown by calling prefetch() method, 43
 - thrown if there is not enough permission to start the media, 44
- seek(int frameNumber) method, for seeking video frames, 181
- seek(long where) method, function of, 8
- semitone, defined, 75, 108
- SEMITONE_CONST, formula for, 76
- sequences. *See also* tone sequences
 - creating, 83–84
 - creating, defining, and playing blocks of, 87
 - playing using ToneControl and Player, 88
- server side, code for, 232–235
- setChannelVolume(int channel, int volume) method
 - for changing volume of a channel, 117
 - for setting the volume for a channel, 115
- setMediaTime() method, setting media time to play back from file starting point with, 34
- setPitch(int milliSemitones) method, setting actual pitch value with, 108
- setProgram(int channel, int bank, int program) method
 - for setting the program/instrument to use on a particular channel, 115
 - using to change a program, 125
- setRate() method, using where a relative value in percentages is specified, 109
- setRecordLocation(String locator) method, for directing recorded data to a location, 147
- setRecordStream(OutputStream stream) method, directs data to an OutputStream, 147
- setStopTime() method, exception thrown when calling on the started Player instance, 139
- setTempo(int milliTempo) method
 - using where an absolute value of the desired tempo is required, 109
 - varying the speed of playback of MIDI sequences using, 107–108
- setTimeBase(TimeBase base) method, overriding the default TimeBase instance with, 9
- setVisible(true) method, calling so the video will be displayed in a Canvas, 169
- sharp, defined, 75–76
- short MIDI event message, sending, 115
- shortMidiEvent(int type, int data1, int data2) method
 - for sending a short MIDI event message, 115
 - sending simple MIDI messages with, 116–117
- showCanvas() method, for displaying a preview of the blog entry to the user, 197
- showDisplay() method, of EditableDisplay interface, 195
- skip(int framesToSkip) method, using to skip video frames, 181
- .smf filename extension, for Standard MIDI file format, 101
- Smith, David, original MIDI standard proposed by, 95
- snapshots, taking, 178–179
- soundbanks. *See also* bank (or soundbanks)
 - getting a list of all installed on your device, 114
 - working with, 120–125
- SourceStream
 - for abstracting a single stream of media data, 8–9
 - in javax.microedition.media.protocol package, 247
 - table of constants to test it for seekability, 8
- Spectator class, function of, 252
- SP-MIDI. *See* Scalable Polyphony MIDI (SP-MIDI)
- Standard MIDI file (SMF) format, common format for storing MIDI messages, 101
- start() method
 - effect of calling on an UNREALIZED instance, 45
 - in a simple linear transition path for a Player instance, 40
 - using to restart paused media file, 21
- started event, representing when an instance has entered the STARTED state, 48
- STARTED state
 - function of, 44–46
 - of Player instance, 39
 - transitions, 46
- Status byte, differentiating System from Channel messages by, 98

- stop() method, effect of, 45
- StopTimeControl
 - illustration showing stopped after a preset time, 138
 - in javax.microedition.media.control package, 244
 - setting preset stop times for media data with, 134–139
 - that allows setting of a preset time, 13
- StopTimeControlMIDlet, code that allows you to play with the StopTimeControl, 135–138
- streaming media, over the network, 181–183
- streaming servers, Web site addresses for, 182
- Sun Java ME DefaultColorPhone emulator, example of output from playing all tones in, 81
- Sun Java ME emulator, signing the NetworkTest MIDlet with trustedkey key in, 66
- Sun Wireless Toolkit, integrated in the Netbeans IDE, 3
- Sun's DefaultColorPhone emulator
 - blog entry choices presented by, 190
 - example of MMAPI capabilities in, 130
 - lack of video recording support in, 188
 - running ControllableMIDIMIDlet to control pitch, tempo, and volume, 104
 - simulated video capture on, 178
 - specification of the encoding formats for property audio.encodings, 132
 - starting the Device Blog MIDlet on, 186
 - video capture formats supported by, 132
- synthetic tones, understanding, 73–78
- System Common messages, in MIDI, 99
- System Exclusive messages, in MIDI, 99
- System messages, 97
 - Common, Real-Time, or Exclusive System message types, 97
 - how they are differentiated from Channel messages, 98
 - table of formats for different types of in MIDI, 99
- System Real Time messages, in MIDI, 99
- System.getProperty(String key) method, for querying the capabilities of your device, 127–133
 - how it works, 107–108
 - in javax.microedition.media.control package, 244
 - using for simple changes, 102
- TextBlogEntry class
 - in Device Blog MIDlet application, 193
 - representing all entries that have a textual component, 199–200
- TextEditForm class, code for creating, 213–214
- ThreadedMIDlet, code creating a new thread to play back a media file, 67–69
- ThreadTest MIDlet
 - example of system and new thread activity and actions, 62
 - screen and console output for on a Motorola emulator, 62
- time signature, understanding, 82
- TimeBase interface
 - in javax.microedition.media package, 242
 - resetting a Player instance's, 9
- timed capture and playback, of audio, 147–151
- Tone Sequence feature set, function of, 15
- tone sequences. *See also* sequences
 - creating, defining, and playing blocks of, 87
 - creating to play using the ToneControl interface, 83–84
 - defining, 82–87
 - distributing, 89–92
 - playing those stored in files, 91–92
 - playing using ToneControl and Player, 88
 - using with ToneControl interface, 81–92
- ToneControl interface
 - creating and playing tones with, 73–93
 - in javax.microedition.media.control package, 245
 - table of constants, 86
 - that allows playing of montonic tone sequences, 13
 - using to create a tone sequence to play, 83–84
 - using tone sequences with, 81–92
- True Audio (TTA) format, 134
- trust, establishment of, 65
- trustedkey key, used to sign the NetworkTest MIDlet, 66
- TTA format. *See* True Audio (TTA) format

T

- Technology compatibility kit (TCK), 5
- TempoControl
 - for changing the tempo of playback for an audio player, 13
 - differentiating between it and RateControl, 109–112

U

- Unified Modeling Language (UML)
 - diagram for common functionalities of a Form, 195
 - diagram for common functionalities of a List, 194
 - model for the Device Blog MIDlet application, 193

- UNREALIZED Player instance, making usable, 40–41
- UNREALIZED state
 - and its transitions, 41
 - of Player instance, 39
- URI syntax, media locators, 249
- URLEncoder class
 - code containing a single method to encode URLs, 209–211
 - function of, 198
- USE_DIRECT_VIDEO argument, using to embed video in a Canvas, 164
- USE_GUI_PRIMITIVE argument, using to embed video in a Form, 164
- User class
 - in Device Blog MIDlet application, 194
 - represents the user of the Device Blog MIDlet, 202–204
- utility classes, creating, 205–211

V

- video
 - positioning and controlling volume, 169–173
 - working with, 163–181
- video and audio, working with, 127–184
- video and images, capturing, 173–181
- video capture
 - formats supported by Sun's DefaultColorPhone emulator, 132
 - on the BenQ M75 device, 192
- video clips, capturing, 179–181
- video feature set, function of, 16

- video frames
 - seeking with FramePositioningControl, 181
 - skipping using the skip(int framesToSkip) method, 181
- VideoBlogEntry
 - in Device Blog MIDlet application, 193
 - that extends MediaBlogEntry, 202
- VideoControl
 - extends GUIControl and controls the display of video, 13
 - in javax.microedition.media.control package, 245
 - as primary control for displaying video, 163–181
 - to take a snapshot of a video, 173–174
- VideoPreviewCanvas, previews, 225–227
- viewfinder, looking through, 174–178
- views
 - creating, 209–211
 - in Device Blog MIDlet application, 194–197
- Voice Channel messages
 - function of, 98
 - more information about, 99–101
 - table of all possibilities along with a description, 100–101
- volumeChanged event, 48
- VolumeControl
 - in javax.microedition.media.control package, 246
 - for providing volume control to audio files, 13–14
 - using for simple volume changes, 102

W

- WAV file, mixing with a MIDI file, 142

FIND IT FAST with the **Apress SuperIndex™**

Quickly Find Out What the Experts Know

L eading by innovation, Apress now offers you its **SuperIndex™**, a turbocharged companion to the fine index in this book. The Apress **SuperIndex™** is a keyword and phrase-enabled search tool that lets you search through the entire Apress library. Powered by dtSearch™, it delivers results instantly.

Instead of paging through a book or a PDF, you can electronically access the topic of your choice from a vast array of Apress titles. The Apress **SuperIndex™** is the perfect tool to find critical snippets of code or an obscure reference. The Apress **SuperIndex™** enables all users to harness essential information and data from the best minds in technology.

No registration is required, and the Apress **SuperIndex™** is free to use.

- ❶ Thorough and comprehensive searches of over 300 titles
- ❷ No registration required
- ❸ Instantaneous results
- ❹ A single destination to find what you need
- ❺ Engineered for speed and accuracy
- ❻ Will spare your time, application, and anxiety level

Search now: <http://superindex.apress.com>

Super Index

Apress®
THE EXPERT'S VOICE™

You Need the Companion eBook


Your purchase of this book entitles you to its companion eBook for only \$10.

We believe this Apress title will prove so indispensable that you'll want to carry it with you everywhere, which is why we are offering the companion eBook for \$10 to customers who purchase this book now. Convenient and fully searchable, the eBook version of any content-rich, page-heavy Apress book makes a valuable addition to your programming library. You can easily find, copy, and apply code—and then perform examples by quickly toggling between instructions and the application. Even simultaneously tackling a donut, diet soda, and complex code becomes simplified with hands-free eBooks!

Once you purchase this book, getting the \$10 companion eBook is simple:

- 1 Visit **www.apress.com/promo/tendollars/**.
- 2 Complete a basic registration form to receive a randomly generated question about this title.
- 3 Answer the question correctly in 60 seconds and you will receive a promotional code to redeem for the \$10 eBook.

2560 Ninth Street • Suite 219 • Berkeley, CA 94710



ASP Today

Apress®
THE EXPERT'S VOICE™

All Apress eBooks subject to copyright protection. No part may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage or retrieval system, without the prior written permission of the copyright owner and the publisher. The purchaser may print the work in full or in part for their own non-commercial use. The purchaser may place the eBook title on any of their personal computers for their own personal reading and reference.

Offer valid through 11/1/06.

**Author of**

*Beginning JSP 2 From
Novice to Professional
(Apress)*

Pro Java ME MMAPI: Mobile Media API for Java Micro Edition

Dear Reader,

The Mobile Media API (MMAPI) is a protocol- and format-agnostic optional API for the Java ME platform (formerly J2ME). With mobile devices becoming multimedia powerhouses, this API is all you need to fully use these multimedia capabilities. This book shows you how to use these device multimedia capabilities with a variety of options, including tones, MIDI, audio, and video.

Although the final version of MMAPI (1.1) was released in 2002, only now are we seeing devices that support this API in full. Nearly every mobile device released today supports the API in some form. The main advantage of the API being protocol and format agnostic is that it gives device manufacturers a lot of flexibility in its implementation; at the same time, however, this also makes it a little difficult for application developers to keep up with the plethora of options. Without a structured understanding of this API, it can be difficult to create applications that work seamlessly on multiple devices and retain support for a minimum set of protocols and formats.

With this in mind, this book addresses the structure of this API in detail. Chapters 1 through 5 focus on the architecture of this API from the ground up, including explanations of threading, networking, and event management. Chapter 6 covers creating and managing tones, Chapter 7 focuses on MIDI, and Chapter 8 explains how to capture audio and video as well as streaming media over a server, among other things. Chapter 9 is a case study that uses the book's companion site at <http://www.mmapibook.com> to develop a device blogging application that allows you to blog using audio, video, images, and simple text.

I hope that you find this book useful in creating multimedia-rich applications for your devices using Java ME. I look forward to your comments and feedback. You can contact me directly at vikram@mmapibook.com.

Vikram Goyal

Join online discussions:
forums.apress.com

FOR PROFESSIONALS
BY PROFESSIONALS™

Apress®

SOURCE CODE ONLINE

www.apress.com

Shelve in
Java/Wireless

User level:
Intermediate-Advanced

THE APRESS JAVA ROADMAP

Beginning J2ME

Pro J2ME Polish: Open Source
Wireless Java Tools Suite

Pro Java ME MMAPI: Mobile Media
API for Java Micro Edition

J2ME Games with MIDP2

ISBN 978-1-4842-2094-8



9 781484 220948