

APPENDIX

1008C



CONFERENCE PROCEEDING

Proceedings of the 2001 IEEE Workshop on Applications of Signal Processing to Audio and Acoustics : October 21-24, 2001, Mohonk Mountain House, New Paltz, New York, USA / IEEE Signal processing Society

IEEE ASSP Workshop on Applications of Signal Processing to Audio and Acoustics (2001 : New Paltz, N.Y.); IEEE Signal Processing Society
c2001

Available at [Linda Hall Library Books - 2nd Floor \(TK7881.4 .I34 2001\)](#) >

Top

Send to

Get It

Details

Virtual Browse

Links

Send to



Email



Permalink



Citation



EasyBib



Export RIS



Export to Excel

https://catalog.lindahall.org/permalink/01LINDAHALL_INST/19lda7s/alma993595233405961



Copy permalink to clipboard

Get It

< [Back to Locations](#)

LOCATION ITEMS

Linda Hall Library

[Available](#) , Books - 2nd Floor ; TK7881.4 .I34 2001

(1 copy, 1 available, 0 requests)



Item in place

Loanable



Details

[Top](#)

[Send to](#)

[Get It](#)

[Details](#)

[Virtual Browse](#)

[Links](#)

Title	Proceedings of the 2001 IEEE Workshop on Applications of Signal Processing to Audio and Acoustics : October 21-24, 2001, Mohonk Mountain House, New Paltz, New York, USA / IEEE Signal processing Society
Other title	Workshop on Applications of Signal Processing to Audio and Acoustics IEEE Workshop on Applications of Signal Processing to Audio and Acoustics IEEE WASPAA 2001 WASPAA 2001
Creator/Contributor	IEEE ASSP Workshop on Applications of Signal Processing to Audio and Acoustics (2001 : New Paltz, N.Y.) > IEEE Signal Processing Society >
Subjects	Sound -- Recording and reproducing -- Mathematics -- Congresses > Signal processing -- Digital techniques -- Congresses > Acoustical engineering -- Congresses > Electro-acoustics -- Congresses > Music -- Acoustics and physics -- Congresses >
Identifier	ISBN : 9780780371262 ISBN : 0780371267 OCLC : (OCoLC)48525034
Publisher	Piscataway, New Jersey : IEEE
Creation date	c2001
Format	vii, 231 p. : ill. ; 28 cm.
General notes	"... (WASPAA)..."--p. i. Cover title. "IEEE Catalog Number 01TH8575"--verso of T.p. Includes bibliographic references and author index.

Virtual Browse



Links

[Display Source Record](#)  

```

leader 01661cam a22003971a 4500
001 993595233405961
005 20030404203300.0
008 011204s2001 njua b 101 0 eng d
010 ##$a 2001091204
020 ##$a9780780371262
020 ##$a0780371267
035 ##$a(OCOLC)48525034
035 ##$9494218
035 ##$a(MoKL)359523-1halldb
035 ##$a(1halldb)359523-1halldb
040 ##$aLHL $cLHL
049 ##$aLHLA
090 ##$aTK7881.4 $b.I34 2001
111 2##$aIEEE ASSP Workshop on Applications of Signal Processing to Audio and Acoustics $d(2001 : $cNew Paltz, N.Y.)
245 10$aProceedings of the 2001 IEEE Workshop on Applications of Signal Processing to Audio and Acoustics : $bOctober 21-24, 2001, Mohonk Mountain House, New
246 31$aWorkshop on Applications of Signal Processing to Audio and Acoustics
246 31$aIEEE Workshop on Applications of Signal Processing to Audio and Acoustics
246 31$aIEEE WASPAA 2001
246 31$aWASPAA 2001
260 ##$aPiscataway, New Jersey : $bIEEE, $cc2001.
300 ##$avii, 231 p. : $bill. ; $c28 cm.
500 ##$a"... (WASPAA)..."--p. i.
500 ##$aCover title.
500 ##$a"IEEE Catalog Number 01TH8575"--verso of T.p.
504 ##$aIncludes bibliographic references and author index.
530 ##$aAlso available via the World Wide Web.
650 #0$aSound $xRecording and reproducing $xMathematics $vCongresses.
650 #0$aSignal processing $xDigital techniques $vCongresses
650 #0$aAcoustical engineering $vCongresses
650 #0$aElectro-acoustics $vCongresses.
650 #0$aMusic $xAcoustics and physics $vCongresses.
710 2##$aIEEE Signal Processing Society
948 ##$aLTI 09/01/2008

```

Linda Hall Library record link =

https://catalog.lindahall.org/permalink/01LINDAHALL_INST/19lda7s/alma993595233405961

MARC record

Source record page

leader 01661cam a2200397la 4500

001 993595233405961

005 20030404203300.0

008 011204s2001 njua b 101 0 eng d

010 ##\$a 2001091204

020 ##\$a9780780371262

020 ##\$a0780371267

035 ##\$a(OCOLC)48525034

035 ##\$9494218

035 ##\$a(MoKL)359523-lhalldb

035 ##\$a(lhalldb)359523-lhalldb

040 ##\$aLHL \$cLHL

049 ##\$aLHLA

090 ##\$aTK7881.4 \$b.I34 2001

111 2#\$aIEEE ASSP Workshop on Applications of Signal Processing to Audio and Acoustics \$d(2001 : \$cNew Paltz, N.Y.)

245 10\$aProceedings of the 2001 IEEE Workshop on Applications of Signal Processing to Audio and Acoustics : \$bOctober 21-24, 2001, Mohonk Mountain House, New Paltz, New York, USA / \$cIEEE Signal processing Society.

246 31\$aWorkshop on Applications of Signal Processing to Audio and Acoustics

246 31\$aIEEE Workshop on Applications of Signal Processing to Audio and Acoustics

246 31\$aIEEE WASPAA 2001

246 31\$aWASPAA 2001

260 ##\$aPiscataway, New Jersey : \$bIEEE, \$cc2001.

300 ##\$avii, 231 p. : \$bill. ; \$c28 cm.

500 ##\$a"... (WASPAA)..."--p. i.

500 ##\$aCover title.

500 ##\$a"IEEE Catalog Number 01TH8575"--verso of T.p.

504 ##\$aIncludes bibliographic references and author index.

530 ##\$aAlso available via the World Wide Web.

650 #0\$aSound \$xRecording and reproducing \$xMathematics \$vCongresses.

650 #0\$aSignal processing \$xDigital techniques \$vCongresses

650 #0\$aAcoustical engineering \$vCongresses

650 #0\$aElectro-acoustics \$vCongresses.

650 #0\$aMusic \$xAcoustics and physics \$vCongresses.

710 2#\$aIEEE Signal Processing Society

948 ##\$aLTI 09/01/2008

APPENDIX

1008D

← → ↻ https://catalog.lib.ncsu.edu/catalog/NCSTU1530971 ☆ ⓘ ⬇️ 📄 ☰

< NC State Home COVID-19 UPDATES RESOURCES search ncsu.edu 🔍

NC STATE University Libraries

Find & Borrow Study & Learn Research & Teaching Media & Making Data & Visualization About

Today's Hours Hill 24 Hours Hunt 24 Hours Chat Online 24 Hours Hours My Account Log Out Ask Us Chat Now

CATALOG
BOOKS & MEDIA

All Fields Search... Search 🔍 Advanced Search

Email Text Cite RIS File Refworks Request Start over Back to Search

Proceedings of the 2001 IEEE Workshop on the Applications of Signal Processing to Audio and Acoustics : October 21-24, 2001, Mohonk Mountain House, New Paltz, New York, USA

- IEEE Signal processing Society.
- IEEE ASSP Workshop on Applications of Signal Processing to Audio and Acoustics (2001 : New Paltz, N.Y.)
- Piscataway, N.J. : IEEE, [2001] / Book / Print

CHAT NOW

Where to find it

[View resource online \(NC State Only\)](#)

Hunt Library  — bookBot

Call Number TK7881.4 .I34 2001
[\(Browse Shelf\)](#)

Status [Available upon request](#)
[Request Item](#)

Authors, etc.

- [IEEE ASSP Workshop on Applications of Signal Processing to Audio and Acoustics \(2001 : New Paltz, N.Y.\)](#)
- [IEEE Signal Processing Society](#)

Find similar items

[Browse shelf](#)

- [Sound](#) > [Recording and reproducing](#)
> [Mathematics](#) > [Congresses](#)
- [Signal processing](#) > [Digital techniques](#)
> [Congresses](#)

- [Acoustical engineering](#) > [Congresses](#)
- [Electro-acoustics](#) > [Congresses](#)
- [Music](#) > [Acoustics and physics](#) >
[Congresses](#)

Other details

Variant Title:

Spine title: IEEE WASPAA 2001

Published:

Piscataway, N.J. : IEEE, [2001]
©2001

Language:

English

Notes:

Cover title.
"IEEE Catalog Number 01TH8575"—verso of T.p.
Includes bibliographical references and author index.

Description:

vii, 231 pages : illustrations ; 28 cm

Genre or Form:

[Congresses](#)
[Conference papers and proceedings](#)

ISBN:

0780371267

OCLC Number:

48525034

Other Identifiers:

LCCN: 2001091204

[View MARC](#)

000 02477cam a2200445Ia 4500
 003 0CoLC
 005 20020102081052.0
 008 011204t20012001njua b 101 0 eng d
 010 |a 2001091204
 020 |a0780371267
 035 |a(0CoLC)48525034
 040 |aLHL|beng|cLHL
 049 |aNRCC
 090 |aTK7881.4|b.I34 2001
 1112 |aIEEE ASSP Workshop on Applications of Signal Pro
 cessing to Audio and Acoustics|d(2001 :|cNew Palt
 z, N.Y.)
 24510 |aProceedings of the 2001 IEEE Workshop on the App
 lications of Signal Processing to Audio and Acoust
 ics :|bOctober 21-24, 2001, Mohonk Mountain House,
 New Paltz, New York, USA /|cIEEE Signal processing
 Society.
 24630 |aWorkshop on the Applications of Signal Processin
 g to Audio and Acoustics
 24630 |aIEEE Workshop on the Applications of Signal Proc
 essing to Audio and Acoustics
 24618 |aIEEE WASPAA 2001
 264 1 |aPiscataway, N.J. :|bIEEE,|c[2001]
 264 4 |c©2001
 300 |avii, 231 pages :|billustrations ;|c28 cm
 336 |atext|btxt|2rdacontent
 337 |aunmediated|bn|2rdamedia
 338 |avolume|bnc|2rdacarrier
 500 |aCover title.
 500 |a"IEEE Catalog Number 01TH8575"—verso of T.p.

500 |aCover title.

500 |a"IEEE Catalog Number 01TH8575"--verso of T.p.

504 |aIncludes bibliographical references and author index.

530 |aAlso available to subscribers of IEEE Xplore via the WWW.

596 |a14

650 0 |aSound|xRecording and reproducing|0http://id.loc.gov/authorities/subjects/sh85125368|xMathematics|0http://id.loc.gov/authorities/subjects/sh2002007922|vCongresses.|0http://id.loc.gov/authorities/subjects/sh99001533

650 0 |aSignal processing|xDigital techniques|vCongresses.|0http://id.loc.gov/authorities/subjects/sh2008111654

650 0 |aAcoustical engineering|vCongresses.|0http://id.loc.gov/authorities/subjects/sh2009113480

650 0 |aElectro-acoustics|0http://id.loc.gov/authorities/subjects/sh85042091|vCongresses.|0http://id.loc.gov/authorities/subjects/sh99001533

650 0 |aMusic|xAcoustics and physics|0http://id.loc.gov/authorities/subjects/sh85088771|vCongresses.|0http://id.loc.gov/authorities/subjects/sh99001533

655 7 |aConference papers and proceedings.|2lcgft

710 2 |aIEEE Signal Processing Society.|0http://id.loc.gov/authorities/names/n90681176

856 4 1 |yView resource online (NCSSU only)|uhttp://proxying.lib.ncsu.edu/index.php?url=http://ieeexplore.ieee.org/servlet/opac?punumber=7653

918 |a1530971

917 |au1530971

Close

APPENDIX

1008E

Try the [Copyright Public Records System \(CPRS\)](#) pilot with enhanced search features and filters.

Database Name: Copyright Catalog (1978 to present)

: Keyword = Applications of Signal Processing to Audio and Acoustics

:

◀ previous next ▶

Labeled View

Proceedings of the 2001 IEEE workshop on the applications of signal...

Relevance: ■ ■ ■ ■ ■

Type of Work: Entry Not Found

Registration Number / Date: TX0005535235 / 2002-05-02

Title: Proceedings of the 2001 IEEE workshop on the applications of signal processing to audio and acoustics, October 21-24, 2001, Mohonk Mountain House, New Paltz, New York, USA.

Description: 231 p.

Copyright Claimant: IEEE

Date of Creation: 2001

Date of Publication: 2001-10-21

Copyright Note: C.O. correspondence.

Variant title: Proceedings of the 2001 IEEE workshop on the applications of signal processing to audio and acoustics, October 21-24, 20

Other Title: workshop on the applications of signal processing to audio and acoustics, October 21-24, 2001, Mohonk Mountain

Names: [IEEE](#)

◀ previous next ▶

Record Options	
Select Download Format:	Format for Print/Save
Enter your email address:	Email
Save results for later:	Save To Bookbag

[Contact Us](#) | [Request Copies](#) | [Get a Search Estimate](#) | [Frequently Asked Questions \(FAQs\) about Copyright](#) | [Copyright Office Home Page](#) | [Library of Congress Home Page](#)

APPENDIX

1008F

Appendix 1008F

Early Citations to Algazi

Source document

Algazi, V. R., Duda, R. O., Thompson, D. M., & Avendano, C., (2001, October), "The cipic hrtf database," in *Proceedings of the 2001 IEEE Workshop on the Applications of Signal Processing to Audio and Acoustics* (Cat. No. 01TH8575), pp. 99-102.

Early Citations: 2002-2003 (in chronological order)

Rocchesso, D. (2002, June). Audio effects to enhance spatial information displays. In *Proceedings. First International Symposium on 3D Data Processing Visualization and Transmission* (pp. 214-223). IEEE.

Zotkin, D. N., Duraiswami, R., Davis, L. S., Mohan, A., & Raykar, V. (2002, August). Virtual audio system customization using visual matching of ear parameters. In *2002 International Conference on Pattern Recognition* (Vol. 3, pp. 1003-1006). IEEE.

Baumgarte, F., & Faller, C. (2002, October). Design and evaluation of binaural cue coding schemes. In *Audio Engineering Society Convention 113*. Audio Engineering Society.

Dittberner, A. B. (2002, December). *A three dimensional instrument-based approach to estimating the directivity index and predicting the directional benefit of directional microphone systems in hearing aids*. The University of Iowa.

Zotkin, D. N. (2002). *Algorithms for acquisition and rendering of sounds in perceptual user interfaces*. University of Maryland, College Park.

Grassi, E., Tulsi, J., & Shamma, S. (2003, July). Measurement of head-related transfer functions based on the empirical transfer function estimate, *Proceedings of the 2003 International Conference on Auditory Display*, Boston, MA, USA, July 6-9, 2003.

Mohan, A., Duraiswami, R., Zotkin, D. N., DeMenthon, D., & Davis, L. S. (2003, July). Using computer vision to generate customized spatial audio. In *2003*

International Conference on Multimedia and Expo. ICME'03. Proceedings (Cat. No. 03TH8698) (Vol. 3, pp. III-57). IEEE.

Noisternig, M., Musil, T., Sontacchi, A., & Holdrich, R. (2003, July). 3D binaural sound reproduction using a virtual ambisonic approach. In *IEEE International Symposium on Virtual Environments, Human-Computer Interfaces and Measurement Systems, 2003. VECIMS'03. 2003* (pp. 174-178). IEEE.



Articles

About 1,671 results (0.03 sec)

Any time

Since 2023

Since 2022

Since 2019

Custom range...

Sort by relevance

Sort by date

Create alert

The cipic hrtf database

☐ Search within citing articles

Measurement of head-related transfer functions: A review

[S Li, J Peissig](#) - [Applied Sciences](#), 2020 - [mdpi.com](#)

A head-related transfer function (HRTF) describes an acoustic transfer function between a point sound source in the free-field and a defined position in the listener's ear canal, and ...

☆ Save [Cite](#) Cited by 49 [Related articles](#) [All 9 versions](#) [»](#)

[\[PDF\] mdpi.com](#)

[\[HTML\] A survey on sound source localization in robotics: From binaural to array processing methods](#)

[S Argentiari, P Danes, P Souères](#) - [Computer Speech & Language](#), 2015 - Elsevier

This paper attempts to provide a state-of-the-art of sound source localization in robotics. Noticeably, this context raises original constraints—eg embeddability, real time, broadband ...

☆ Save [Cite](#) Cited by 155 [Related articles](#) [All 7 versions](#)

[\[HTML\] sciencedirect.com](#)

[\[book\] Acoustics and psychoacoustics](#)

[DM Howard, J Angus](#) - 2017 - [books.google.com](#)

The acoustics of a space can have a real impact on the sounds you create and capture. Acoustics and Psychoacoustics, Fifth Edition provides supportive tools and exercises to help ...

☆ Save [Cite](#) Cited by 968 [Related articles](#) [All 8 versions](#) [»](#)

[\[book\] Architectural acoustics](#)

[M Long](#) - 2005 - [books.google.com](#)

Architectural Acoustics offers a comprehensive overview of acoustical science at a level suitable for either advanced undergraduate or introductory graduate courses in architectural ...

☆ Save [Cite](#) Cited by 988 [Related articles](#) [All 6 versions](#) [»](#)

[\[PDF\] ethernet.edu.et](#)

[\[book\] Head-related transfer function and virtual auditory display](#)

[B Xie](#) - 2013 - [books.google.com](#)

This book systematically details the basic principles and applications of head-related



Articles

About 45 results (0.02 sec)

Any time

Since 2023

Since 2022

Since 2019

Custom range...

2002 — 2003

Search

Sort by relevance

Sort by date

Create alert

The cipc hrtf database

☐ Search within citing articles

Approximating the head-related transfer function using simple geometric models of the head and torso

VR Algazi, RO Duda, R Duraiswami... - The Journal of the ..., 2002 - asa.scitation.org

The head-related transfer function (HRTF) for distant sources is a complicated function of azimuth, elevation and frequency. This paper presents simple geometric models of the head ...

☆ Save Cite Cited by 298 Related articles All 15 versions

[PDF] escholarship.org

HRTF personalization using anthropometric measurements

DYN Zotkin, J Hwang, R Duraiswaini... - 2003 IEEE workshop ..., 2003 - ieeexplore.ieee.org

Individualized head related transfer functions (HRTFs) are needed for accurate rendering of spatial audio, which is important in many applications. Since these are relatively tedious to ...

☆ Save Cite Cited by 259 Related articles All 8 versions

[PDF] umd.edu

A 3D ambisonic based binaural sound reproduction system

M Noisternig, A Sontacchi, T Musil... - Audio Engineering Society ..., 2003 - aes.org

A 3D real time rendering engine for sound reproduction via headphones is presented. Binaural sound reproduction requires filtering of virtual sources with head related transfer ...

☆ Save Cite Cited by 166 Related articles All 6 versions

[PDF] researchgate.net

The use of head-and-torso models for improved spatial sound synthesis

R Algazi, RO Duda, DM Thompson - 2002 - escholarship.org

This paper concerns the use of a simple head-and-torso model to correct deficiencies in the low-frequency behavior of experimentally measured head-related transfer functions ...

☆ Save Cite Cited by 120 Related articles All 11 versions

[PDF] escholarship.org

3D binaural sound reproduction using a virtual ambisonic approach

M Noisternig, T Musil, A Sontacchi... - ... Symposium on Virtual ..., 2003 - ieeexplore.ieee.org

Conventional binaural sound reproduction from a head database requires the use of head-related transfer functions (HRTFs) that are often measured in anechoic chambers. This paper presents a virtual ambisonic approach to binaural sound reproduction that avoids the need for HRTFs. A 3D real time rendering engine for sound reproduction via headphones is presented. Binaural sound reproduction requires filtering of virtual sources with head related transfer ...

[PDF] gravitywaves.com

APPENDIX

1011A

Journals & Magazines > Interacting with Computers > Volume: 16 Issue: 5

An experimental study on the role of software synthesized 3D sound in augmented reality environments

Publisher: OUP

[Cite This](#)

[PDF](#)

Zhiying Zhou ; Adrian David Cheok ; Xubo Yang ; Yan Qiu [All Authors](#)



Abstract

[Authors](#)

[Keywords](#)

Abstract:

Investigation of augmented reality (AR) environments has become a popular research topic for engineers, computer and cognitive scientists. Although application oriented studies focused on audio AR environments have been published, little work has been done to vigorously study and evaluate the important research questions of the effectiveness of 3D sound in the AR context, and to what extent the addition of 3D sound would contribute to the AR experience. Thus, we have developed two AR environments and performed vigorous experiments with human subjects to study the effects of 3D sound in the AR context. The study concerns two scenarios. In the first scenario, one participant must

Need
Full-Text

access to IEEE Xplore
for your organization?

[CONTACT IEEE TO SUBSCRIBE >](#)

More Like This

[The Effect of Avatar Appearance on Social Presence in an Augmented Reality Remote Collaboration](#)

2019 IEEE Conference on Virtual Reality and 3D User Interfaces (VR)
Published: 2019

[Feedback](#)

use vision only and vision with 3D sound to judge the relative depth of augmented virtual objects. In the second scenario, two participants must co-operate to perform a joint task in a game-based AR environment. Hence, the goals of this study are (1) to access the impact of 3D sound on depth perception in a single-camera AR environment, (2) to study the impact of 3D sound on task performance and the feeling of 'human presence and collaboration', (3) to better understand the role of 3D sound in human-computer and human-human interactions, (4) to investigate if gender can affect the impact of 3D sound in AR environments. The outcomes of this research can have a useful impact on the development of audio AR systems which provide more immersive, realistic and entertaining experiences by introducing 3D sound. Our results suggest that 3D sound in AR environment significantly improves the accuracy of depth judgment and improves task performance. Our results also suggest that 3D sound contributes significantly to the feeling of 'human presence and collaboration' and helps the subjects to 'identify spatial objects'.

Published in: [Interacting with Computers](#) (Volume: 16 , Issue: 5, October 2004)

Page(s): 989 - 1016

DOI: [10.1016/j.intcom.2004.06.014](#)

Date of Publication: October 2004 

Publisher: OUP

▼ **ISSN Information:**

Print ISSN: 0953-5438

Electronic ISSN: 1873-7951

[Authors](#)

[Keywords](#)

[Augmented Reality Remote
Collaboration with Dense
Reconstruction](#)

2018 IEEE International Symposium on
Mixed and Augmented Reality Adjunct
(ISMAR-Adjunct)

Published: 2018

[Show More](#)



Date of Publication: October 2004 ?

Publisher: OUP

▼ ISSN Information:

Print ISSN: 0953-5438


Electronic ISSN: 1873-7951

Authors

Keywords

Author Keywords

3D sound, Augmented reality, Depth perception, Localization of sound, Task performance, Collaboration, User studies

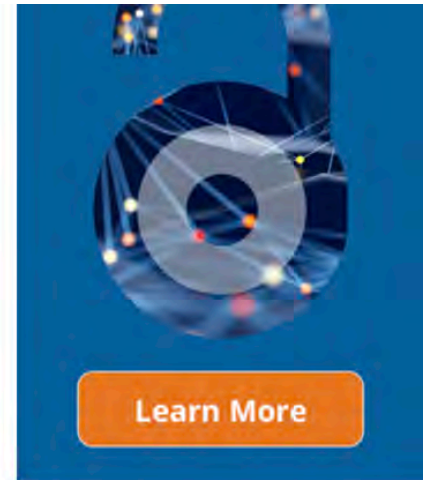

IEEE Personal Account

CHANGE USERNAME/PASSWORD

Purchase Details

PAYMENT OPTIONS

VIEW PURCHASED DOCUMENTS

Profile Information

COMMUNICATIONS PREFERENCES

PROFESSION AND EDUCATION

TECHNICAL INTERESTS

Need Help?

US & CANADA: +1 800 678 4333

WORLDWIDE: +1 732 981 0060

CONTACT & SUPPORT

Follow



About IEEE *Xplore* | Contact Us | Help | Accessibility | Terms of Use | Nondiscrimination Policy | IEEE Ethics Reporting  | Sitemap | IEEE Privacy Policy
A not-for-profit organization, IEEE is the world's largest technical professional organization dedicated to advancing technology for the benefit of humanity.

© Copyright 2023 IEEE - All rights reserved.

Feedback

APPENDIX

1011B

LIBRARY OF CONGRESS



0 018 412 286 8

INTERACTING
WITH
COMPUTERS

16

2004

QA 76
.9
.H85 I59
Set 1

Interacting with Computers

**The Interdisciplinary Journal of
Human-Computer Interaction**

Special Issue
Physiological Computing
(Includes Regular Papers)

Also available on

SCIENCE @ DIRECT®

www.sciencedirect.com

Elsevier



INTERACTING WITH COMPUTERS

Volume 16 (2004)

Special Issue

Physiological Computing

Guest Editor:

Winslow Burleson

MIT Media Laboratory
20 Ames Street
Cambridge, MA 02139, USA
E-mail: win@media.mit.edu



ELSEVIER

Amsterdam – Boston – Jena – London – New York – Oxford – Paris – Philadelphia – St. Louis

Interacting with Computers is an international journal published by Elsevier B.V.

<http://www.elsevier.com/locate/intcom>

Address for submissions: Papers may be submitted to the General Editor.

Subscription enquiries and orders: Elsevier B.V., Order Fulfilment Department, PO Box 211, 1000 AE Amsterdam, The Netherlands. Tel.: +31 (20) 485 3642; Fax: +31 (20) 485 3598.

Annual institutional subscription rates 2004 (6 issues): Associated personal subscription rates are available on request for those whose institutions are library subscribers. Non-VAT registered customers in the European Community will be charged the appropriate VAT in addition to the price listed. Prices include postage and insurance and are subject to change without notice.

Back issues: are available from Oxford Fulfilment Centre, Elsevier Ltd, The Boulevard, Langford Lane, Kidlington, Oxford OX5 1DX, UK. Tel.: +44 (0)1865 843699; Fax: +44 (0)1865 843911; e-mail: journals@elsevier.co.uk

Advertising information: Advertising orders and enquiries may be sent to: **Europe and ROW:** Miss Katrina Barton, Commercial Sales, Elsevier, 84 Theobald's Road, London, WC1X 8RR; phone: (+44) (0) 20 7611 4117; fax: (+44) (0) 20 7611 4463; e-mail: commercialsales@elsevier.com. **USA, Canada and South America:** Mr Tino DeCarlo, Elsevier Inc., The Advertising Department, 360 Park Avenue South, New York, NY 10010-1710, USA; phone: (+1) (212) 633 3815; fax: (+1) (212) 633 3820; e-mail: t.decarlo@elsevier.com. **Japan:** The Advertising Department, Elsevier K.K., 4F Higashi-Azabu, 1-Chome Bldg, 1-9-15 Higashi-Azabu, Minato-ku, Tokyo 106-0044, Japan; phone: (+81) (3) 5561 5037; fax: (+81) (3) 5561 5047; e-mail: jp.info@elsevier.com.

Microfilm: A microfilm version of *Interacting with Computers* is available from University Microfilms Inc., 300 N. Zeeb Road, Ann Arbor, MI 48106-1346, USA.

USA mailing notice: *Interacting with Computers* (ISSN 0953-5438) is published bi-monthly in January, March, May, July, September and December by Elsevier B.V. (P.O. Box 211, 1000 AE Amsterdam, The Netherlands). Annual subscription price in the USA US\$ 779 (valid in North, Central and South America), including air speed delivery. Application to mail at periodical postage rate is pending at Jamaica, NY 11431.

USA POSTMASTER: Send address changes to *Interacting with Computers*, Publications Expediting Inc., 200 Meacham Ave, Elmont, NY 11003.

AIRFREIGHT AND MAILING in the USA by Publications Expediting Inc., 200 Meacham Avenue, Elmont, NY 11003.

Copyright © 2004 Elsevier B.V. All rights reserved

This journal and the individual contributions contained in it are protected by the copyright of Elsevier B.V. and the following terms and conditions apply to their use.

Photocopying

Single photocopies of single articles may be made for personal use as allowed by national copyright laws. Permission of the publisher and payment of a fee is required for all other photocopying, including multiple or systematic copying, copying for advertising or promotional purposes, resale, and all forms of document delivery. Special rates are available for educational institutions that wish to make photocopies for non-profit educational classroom use.

Permissions may be sought directly from Elsevier's Rights Department in Oxford, UK; phone (+44) 1865 843830, fax: (+44) 1865 853333, e-mail: permissions@elsevier.com. Requests may also be completed on-line via the Elsevier home page (<http://www.elsevier.com/locate/permissions>).

In the USA, users may clear permissions and make payment through the Copyright Clearance Center, Inc., 222 Rosewood Drive, Danvers, MA 01923, USA; phone: (978) 7508400, fax: (978) 7504744, and in the UK through the Copyright Licensing Agency Rapid Clearance Service (CLARCS), 90 Tottenham Court Road, London W1P 0LP, UK; phone: (+44) 171 631 5555, fax: (+44) 171 631 5500. Other countries may have a local reprographic rights agency for payments.

Derivative Works

Subscribers may reproduce tables of contents or prepare lists of articles including abstracts for internal circulation within their institutions.

Permission of the publisher is required for resale or distribution outside the institution.

Permission of the publisher is required for all other derivative works, including compilations and translations.

Electronic Storage or Usage

Permission of the publisher is required to store or use electronically any material contained in this journal, including any article or part of an article. Contact the publisher at the address indicated.

Except as outlined above, no part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without prior written permission of the publisher.

Address permissions requests to: Elsevier Rights Department, at the fax and e-mail addresses noted above.

Notice

No responsibility is assumed by the Publisher for any injury and/or damage to persons or property as a matter of products liability, negligence or otherwise, or from any use or operation of any methods, products, instructions or ideas contained in the material herein. Because of rapid advances in the medical sciences, in particular, independent verification of diagnoses and drug dosages should be made. Although all advertising material is expected to conform to ethical (medical) standards, inclusion in this publication does not constitute a guarantee or endorsement of the quality or value of such product or of the claims made of it by its manufacturer.

© The paper used in this publication meets the requirements of ANSI/NISO Z39.48-1992 (Permanence of Paper).

Printed in The Netherlands



Available online at www.sciencedirect.com

SCIENCE @ DIRECT®



**Interacting
with
Computers**

www.elsevier.com/locate/intcom

Interacting with Computers: the Interdisciplinary Journal of Human-Computer Interaction

Volume 16 Issue 5 October 2004

Special Issue (Includes Regular Papers)
Physiological Computing

Editorial

Winslow Burleson 851

A research agenda for physiological computing

Jennifer Allanson and Stephen H. Fairclough 857

An analysis of facial movement tracking in ordinary human-computer interaction

Robert Ward 879

On physiological computing with an application in interactive art

Ernest Edmonds, Dave Everitt, Michael Macaulay and Greg Turner 897

A platform for wearable physiological computing

Astro Teller 917

Regular Papers

Desktop virtual environments: a study of navigation and age

H. Sayers 939

Investigating actability dimensions: a language/action perspective on criteria for information systems evaluation

Pär J Ågerfalk 957

An experimental study on the role of software synthesized 3D sound in augmented reality environments

Zhiying Zhou, Adrian David Cheok, Xubo Yang and Yan Qiu 989

For more information visit the journal homepage <http://www.elsevier.com/locate/intcom>

Interacting with Computers is the journal of the British HCI Group,
a Specialist Group of the British Computer Society





An experimental study on the role of software synthesized 3D sound in augmented reality environments

Zhiying Zhou, Adrian David Cheok*, Xubo Yang, Yan Qiu

Department of Electrical and Computer Engineering, National University of Singapore, Singapore 117576

Received 19 January 2004; revised 17 April 2004; accepted 17 June 2004

Available online 5 August 2004

Abstract

Investigation of augmented reality (AR) environments has become a popular research topic for engineers, computer and cognitive scientists. Although application oriented studies focused on audio AR environments have been published, little work has been done to vigorously study and evaluate the important research questions of the effectiveness of 3D sound in the AR context, and to what extent the addition of 3D sound would contribute to the AR experience.

Thus, we have developed two AR environments and performed vigorous experiments with human subjects to study the effects of 3D sound in the AR context. The study concerns two scenarios. In the first scenario, one participant must use vision only and vision with 3D sound to judge the relative depth of augmented virtual objects. In the second scenario, two participants must co-operate to perform a joint task in a game-based AR environment.

Hence, the goals of this study are (1) to access the impact of 3D sound on depth perception in a single-camera AR environment, (2) to study the impact of 3D sound on task performance and the feeling of 'human presence and collaboration', (3) to better understand the role of 3D sound in human-computer and human-human interactions, (4) to investigate if gender can affect the impact of 3D sound in AR environments. The outcomes of this research can have a useful impact on the development of audio AR systems which provide more immersive, realistic and entertaining experiences by introducing 3D sound. Our results suggest that 3D sound in AR environment significantly improves the accuracy of depth judgment and improves task performance. Our results

* Corresponding author. Tel.: +6874-6850; fax: +6779-1103.

E-mail address: adriancheok@nus.edu.sg (A.D. Cheok).

also suggest that 3D sound contributes significantly to the feeling of ‘human presence and collaboration’ and helps the subjects to ‘identify spatial objects’.

© 2004 Published by Elsevier B.V.

Keywords: 3D sound; Augmented reality; Depth perception; Localization of sound; Task performance; Collaboration; User studies

1. Introduction

Audio feedback, especially 3D sound, has proven itself to be an effective addition to human–computer interfaces in many studies. Sounds can be used to present information that would otherwise be difficult to convey through other means (Gaver et al. 1991). Moreover, 3D sound can convey location information for specific alerts or warnings. Also, 3D sound was reported to increase the immersive experience in virtual reality (VR) environments and hence provide a more realistic virtual environment (Begault 1994). Furthermore, the addition of 3D sound has been shown to increase the performance in active tasks (Wenzel, 1996; Avionique). In previous works, Mereu (1995) suggested that sound could improve depth perception in 3D interfaces. Makino et al. (1996) also indicated that spatialized sound from virtual acoustic display helps fast and accurate navigation. Additionally, simulations by Gaver et al. (1991) suggested that auditory icons can play a significant role in multiprocessing and collaborative system. Unlike VR in which extensive research has been carried on 3D sound, augmented reality (AR) aided by 3D sound is still a relative new research area.

AR, as placed on the reality–virtuality continuum (Milgram et al., 1994), refers to the incorporation of virtual computer graphics objects into a real world scene, or alternatively the inclusion of real world elements into a virtual environment. The former case is generally referred to as AR, and the latter as augmented virtuality. Azuma (1997) has defined three characteristics that are integral to an AR interface. First, it combines the real and the virtual. Second, it is interactive in real time. Third, it is registered in three dimensions. Although AR is often associated with visualization (starting with the first head-mounted display by Sutherland (1968)), augmentation is also possible in the aural domain (Cohen et al., 1993; Mynatt et al., 1997). If we extend this notion to include sonic effects, a real-time registered three dimensional (3D) sound could also be a paradigm of AR applications, and is termed augmented audio reality (AAR) (Cohen et al., 1993).

A few applications have applied 3D sounds in AR to enhance user experiences. Billinghurst et al. (1998) presented a prototype wearable communication space that uses spatial visual and audio cues to enhance communication between remote groups of people. The ‘Listen Project’ (Eckel et al., 2001) provides users with intuitive access to personalize and situated audio information spaces while they naturally explore everyday environments. It augments the physical environment through a dynamic sound-scape, which users experience over motion-tracked wireless headphones. The ‘Magic Music Desk’ (Zhou et al., 2002) registered virtual sound sources on fiducial markers from which 3D position information was retrieved by vision-based tracking method (Kato and Billinghurst, 1999). ‘Touch space’ (Cheok et al., 2004) applied different 3D sounds to represent different

moving avatars in AR environment. Although there are quite a few AAR applications, the effectiveness of 3D sound in AAR has been rarely investigated. The particular research problems and questions that arise are:

1. Exact spatial 3D sound in virtual and augmented environments requires perceptual externalization of the sound source, which can only be brought about by using head related transfer functions (HRTFs) (Bill G, 1994) (these are tuned to each individual), reflections, reverberation, etc. (Wenzel, 1994) which might be too complex to be included in normal real time AR applications (which need to be a real time interactive system for any user without individual training). An alternative way to generate 3D sound is to use open source software development kits (SDKs) which have already incorporated the general HRTFs database and simple model of environment to generate 3D sound. The minimum requirement of these SDKs to generate 3D sound is to update the relative position of the virtual sound source to the head co-ordinate system. Thus, with such sound sources, a problem turns to be how can we track the sound source relative to user's head co-ordinate system.
2. How can we precisely register virtual sound sources in the physical world? More specifically, what kind of tracking method is suitable for obtaining precise position and orientation of the sound source in AR environments?
3. As 3D sound has been reported to improve depth perception (Mereu S, 1995) in 3D interfaces, will this argument stand in AR environment? If so, how can we investigate the effect of 3D sound? For example, what measures can be defined to quantify the performance of depth judgments?
4. Normally the space of AR environments is relatively small, and the attenuation of sound with distance in this small area can be too vague to be perceived. This is because in most 3D sound systems, the intensity of sound (a very strong distance cue) would follow incremental reductions of 6 DB for each successive position of doubled distance (Begault, 1994). This means that for small areas, the 3D sound hardly plays a role to provide a cue to the depth (or the distance of the frontal sound sources). In order to make 3D sound give a cue to depth in a small space, we need to exaggerate the intensity difference of 3D sound according to distance (depth) changes of the virtual sound sources. However, this leads to a new issue, which is to research if this exaggeration will ruin the realistic and immersive feeling which we have been focused on. It needs to be investigated what are the subjective feelings on this exaggeration to the human.
5. Does 3D sound still improve the task performances in AR environment? If so, what kind of tasks can be used to evaluate a user's performance and what measures can be applied to investigate the 3D sound's effect on improving task performance?
6. Does 3D sound play a significant role in collaborative AR environment? If so, how can we apply 3D sound and evaluate its role? In what ways will the subjective experience 'human presence and collaboration' in AR environments? Especially what will be the subjective experiences from the addition of 3D sound?

Recent software and hardware advances in AR and auditory interfaces enable us to integrate 3D sound into AR environments and study these interesting questions. Although the quality of 3D sound generated by software synthesizers (Loki Entertainment Software)

is still to be examined by rigorous tests (Langendijk and Bronkhorst, 2000), the pre-tests taken by the developer and the user feedback from commercial applications have to some extent proved its fidelity. Our goal of this research is to do both quantitative and qualitative studies on the effectiveness of such software synthesized 3D sound in an AR environment. The outcomes of this research can have a useful impact on the development of AAR interfaces and the enhancement of AR environments for performing collaborative tasks such as co-operative teaching, training and gaming systems. Our contributions to the research topic are as follows:

1. *Depth perception in AR:* We investigated the impact of 3D sound on improving depth perception in AR systems with single-camera settings. We designed an experiment to measure the accuracy of depth judgment in the cases with and without 3D sound.
2. *Perceptual feeling of sound depth exaggeration:* In order to make full use of 3D sound's dimensional information in a relative small AR environment we exaggerated the intensity difference of virtual sound sources in different depths by multiplying an additional scalar factor. We investigated the subject's perceptual feeling to this exaggeration.
3. *Task analysis with AR sound:* We designed a searching task in another AR environment which requests the user to find a virtual character in the augmented scene; we investigated the impact of 3D sound on the task completion time.
4. *Collaboration and location with AR sound:* We applied a constant 3D sound on subject and task target to investigate the impact of 3D sound on the subject's feeling of 'human presence and collaboration' and the impact on 'locating correct augmented information'.

In Section 2, we discuss the general issues of developing AAR with 3D sound, and two different tracking methods for registering virtual 3D sound sources. The experimental goals and subjects are introduced in Section 3. The results of the experiments are then given and discussed in Section 4. The conclusions of the study are summarized in Section 5.

2. Development of AR environments with 3D sound for experimental analysis

2.1. General issues

Generating real 3D sound requires requires perceptual externalization of the sound source, which can only be brought about by using HRTFs (Bill G, 1994), reflections, reverberation, etc. (Wenzel, 1994) These HRTFs can be used to produce 3D sound effects from a linear convolution between sound signals and its corresponding spatial related impulse response (Wenzel et al., 1988) while the reflections and reverberations involve sophisticated modelling of environment. The individually derived HRTFs are better for individual users to provide more realistic sound experience. However, individual HRTFs are difficult for AR implementation due to the fact that AR systems are designed to be real time interactive systems that do not need individual user configuration. Thus our experiments were taken for randomized selected students. For easy implementation of 3D sound generation, several open source software development kits (SDKs), have been

developed such as OpenAL (Loki Entertainment Software) and FMOD (L. Firelight Technologies). These use the general HRTFs database and modeling environment in a relative simple manner. However, as mentioned in Section 1, for AR systems 3D sound does not play a significant role to tell the depth (or the distance of the frontal sound sources) because most of actual AR spaces are relatively of small size (for example small office, tabletops, books, etc.).

Sound intensity has been shown to be a key cue in distance perception in humans. However, in the small physical spaces used in AR systems the human is only effectively provided with binaural cues from the synthesizer. Thus we try to also add the effect of intensity for the depth cue. Our approach is to exaggerate the intensity difference of sound sources in different depths by applying an additional scaling factor to the intensity of 3D sound generated by synthesizer. The intensity of the i th 3D sound V_i' is given by Eq. (1):

$$V_i' = (D_{\max} - D_i)V_i/D_{\max} \quad (1)$$

where D_i is the depth of the i th 3D sound source; V_i is the intensity of the i th 3D sound generated by synthesizer given the position of the i th sound source. $D_{\max}$ is the possible maximum distance of the sound sources which is subject to the space of different AR environments. We measured the space in our first and second experiments and the maximum distance was 1.5 and 5.5 m, respectively.

Apart from intensity, it is known that for distance perception the ratio of the energies of direct and reflected sound is of importance (Middlebrooks and Green, 1991; Bronkhorst and Houtgast, 1999). For objects farther away from the listener, coupling the decrease in virtual sound intensity with an increase in the 'reverberation' will lead to a more realistic perceptions. In order to focus on the main points with regards to AR sound we did not add the factor of reverberation, and left this issue for our future research.

In our first experiment the sound sources are always placed around 1.5 m away in the front of the listener. However, in a more general and complex AR environment like the second experimental environment, the listener can walk freely in a physical space where virtual sound sources can be very close to the left and the right side of the head. In this case, the head starts functioning as a sound barrier for high frequencies. Consequently, the (high-frequency) sound intensity will of course increase as the source approaches the head in the ear at the same side of the head but, due to the increasing barrier function, decrease in the ear at the other side of the head. It is reported that binaural cues play an important role in auditory distance perception for nearby sources (Brungart and Rabinowitz, 1999; Brungart, 1999). This fact plus our exaggeration process mentioned above causes a design problem of AAR when the listener is very close to or even overlaid on the virtual sound source. In this case the user can have very strange auditory experience and even get confused. This was confirmed in our experimental results which are shown below (Question 3 of Experiment 2 below).

2.2. Development of AR environments with 3D sound for experimental analysis

In the most common AR paradigm, the user wears a head mounted display (HMD) through which the user views the real world, either directly, or via a video camera attached

to the front of the display Virtual objects are then superimposed on the real world. Early studies such as (Feiner et al., 1993) of this type simply overlaid two-dimensional text information on objects in the scene, but it has now become common to superimpose objects in three dimensions. The minimal requirements for this are that the position of the camera must be determined relative to the whole scene (or an object therein). The transformation matrix (TCM) between the scene and camera co-ordinates can then be used to generate the correct and seamless view of the virtual object. Given this TCM we can get the exact 3D position of the virtual object (virtual sound source) in the user's head co-ordinate system, which is the basic requirement of 3D sound synthesizer.

In our experiments, we applied the OpenAL (Loki Entertainment Software) to generate the 3D sound. Essential parameters needed are the virtual sound source's 3D position and its speed relative to the user's ear. More generally, the 3D position and speed of the virtual sound source and the position and orientation of user's head are needed. In the following parts we will introduce two tracking methods to solve this problem. However, since in our experiments the relative speed of head to virtual sound source is only as slow as 2 m s^{-1} , we ignored the Doppler Effect caused by their relative movement and thus we were only interested in their positions and orientations.

In our experiments, the final augmented virtual image was viewed through a Daeyang Cy-Visor DH-4400VP HMD, which presented the same 640×480 pixel image to both eyes. A PremaCam SCM series color security camera was attached to the front of this HMD. Our visual augmentation produced 25 images of 320×480 pixel resolution per second. To synchronize with the update of the visual scene, we updated the position of the virtual sound sources 25 times per second. The headphone on the HMD plays back the 3D sound generated by the computer. In this way, we provide an AR environment which is both visually and audibly augmented.

2.3. AR experimental environment implemented by vision-based tracking method

There have been many vision tracking methods for AR reported in recent years. In our first experiment, we used a precise vision-based toolkit for AR tracking (Kato and Billinghurst, 1999) reported by Kato and Billinghurst. It used image-processing technology to retrieve 3D position information from a fiducial marker. The 'ARGroove' (Poupyrev et al., 2000) applied this tracking method to get different position and orientation descriptions of the marker movements for which they defined different music. Our first AR experiment system used this tracking method to track the position of virtual sound source which is attached on fiducial marker.

The 3D position of the marker relative to camera can be obtained by computing the TCM from the camera co-ordinates to the 7 marker co-ordinates (Kato and Billinghurst, 1999). However, the 3D position of the marker we obtain is based on the camera co-ordinates. Thus, in order to obtain the 3D position of the marker in user's head co-ordinates (3D sound synthesizer's co-ordinates), simple translations from the camera to the center of user's inter-aural axis should be considered. As shown in Fig. 1, in order to attach the virtual sound source on the marker, the TCM from the 3D sound co-ordinates to marker co-ordinates could be calculated by simply applying translations to TCM obtained before. The 3D position of the marker in the 3D sound co-ordinates are then fed

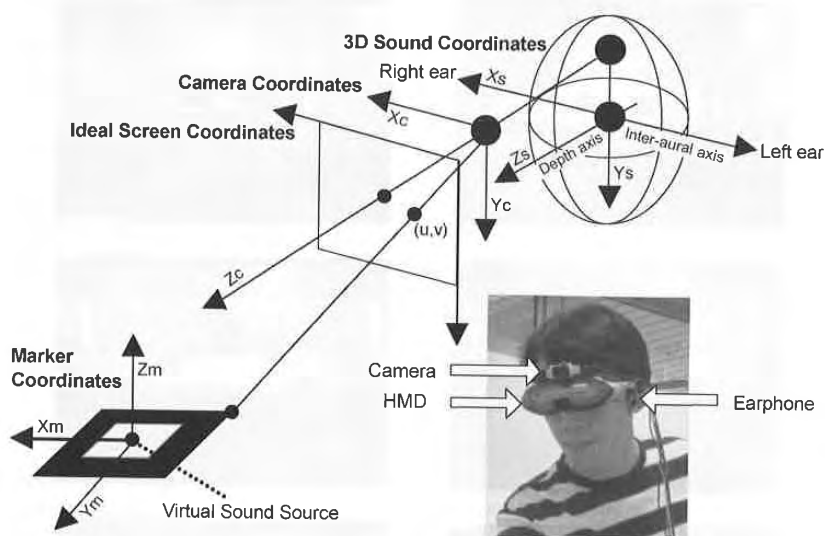


Fig. 1. In order to place a virtual object in the image of the three dimensional scene, the Euclidean transformation between the camera co-ordinates (X_c, Y_c, Z_c) and the marker co-ordinates (X_m, Y_m, Z_m) is estimated. This calculation is based on the imaged position of the corners of the square marker. The imaged position of one of these corners is depicted with pixel co-ordinates (u, v). To obtain the transformation matrix from the 3D sound co-ordinates to marker co-ordinates, translations should be taken from the camera co-ordinates to the 3D sound co-ordinates (X_s, Y_s, Z_s). The picture at the right bottom shows the physical setting of our single camera system where camera is mounted to the front of HMD and 3D sound plays back into the earphones.

into OpenAL (Loki Entertainment Software) for synthesis. Therefore, the 3D sound appears to emanate from the marker.

2.3.1. Depth confusion problem in single camera AR environment

In the most common AR paradigm, a single camera is used to capture the physical scenes (Billinghurst et al., 1998; Zhou et al., 2002; Kato and Billinghurst, 1999). This is not only because this setup is cheap but also because that it requires little computation cost and can be easily implemented. However, although this kind of AR environment setup enables the first-personal viewpoint, it cannot provide stereo video images for each eye, and this can lead to the difficulty of depth perception. Solving occlusion problems (Wloka and Anderson, 1995) or using stereo cameras can improve the depth perception problem. However, it requires more sophisticated settings (Stockburger, 1998) and more computational cost (Kanbara et al., 2000; Takagi et al., 2000). Thus, the low-cost single camera mono system is still widely used for AR applications.

Our objective is to find out whether 3D sounds could be helpful to improve depth perception in this commonly used lower-cost mono AR environment. Fig. 2 shows the depth confusion problem related to this kind of AR environment setup. We know that



Fig. 2. The depth confusion problem in a single-camera AR setting. The left column shows the image sequences of a scene captured by a moving camera while the right column shows the augmented view seen by the user. (1) In the top left frame, two markers of different size are located in different depth which is hard to tell because of lacking cues. In the following frames, we know that the left marker is nearer to the camera with the cues obtained from the motion, background and lighting environment. (2) Right column shows that the augmented objects occlude everything behind them hence weaken the effect of motion cue. Without background information (in this special case, the objects are located on the same board), relative depth is hard to tell.

human depth perception is based on both monocular cues and binocular cues. Binocular cues include parallax and ocular convergence, while monocular cues include interposition, relative (or familiar) size, linear perspective, texture gradient, light and shadows. The users' responses in our user study suggest that the depth of augmented object is hard to decide in this kind of mono AR environment setup.

This is because that the binocular cues do not work well due to the single-camera setting. Furthermore, because the augmented objects were rendered over the captured images, they appear to occlude everything behind them. To render the virtual objects to be faithful to the actual lighting conditions of the physical world is still a challenging problem. The correct display of shadow and texture gradient of the augmented objects needs the precise estimation of light sources (Kanbara and Yokoya, 2002). The occlusion problem of the augmented objects relative to the real object is also a difficult problem (Fuhrmann et al., 1999). Due to these difficulties, it is still not possible in real-time AR systems to have realistic virtual objects with respect to lighting, shadowing, and occlusion. Thus, our goal is to find out whether 3D sound can help in the judgment of depth, and if so, to what extent can it be helpful for AR.

We thus designed an experimental task which requires the subject to tell which of the augmented objects is closer (less deep) to her and we calculated the accuracy of the judgments. The subjects were required to give their judgment under the conditions of vision plus 3D sound and vision only. As will be seen in the sections below, the judgment accuracy was found to be significantly higher when 3D sound was applied.

2.4. AR experimental environment implemented by acoustic-inertial tracking method

The vision-based marker tracking method can register the virtual objects and virtual sound sources into the real scene precisely. However it has several short-comings as well. For example, the marker tracking algorithm is sensitive to the lighting environment. Also the requirement of keeping a marker in the scene all the time limits the user's movement as well as viewpoint and thus restricts the user to a relatively small space and a narrow angle of view. This drawback could be improved to some extent by using multi-marker tracking or natural feature tracking methods (Neumann and You, 1999). However, they still do not allow fully free head and body movements.

Some previous work used other methods for registering a virtual sound source in a larger space which allowed user's free movement. Makino et al. (1996) used the Global Positioning System (GPS) to locate the traveler within the environment. With differential correction by way of audio link from a GPS reference receiver in the local vicinity, localization is accurate to around 1 m under good conditions of reception. The listen project (Eckel et al., 2001) used motion-tracked wireless headphones to retrieve the position of the user in the environment. A similar method was applied by Schmandt (1998) where the head position is gained from a Polhemus sensor mounted on the headphones.

In our research system (Cheok et al., 2004; Wang et al., 2002), we use the InterSense IS-900 system (InterSense) for precise motion tracking. The IS-900 system is a hybrid acoustic-inertial six degree of freedom (6 DOF) position and orientation tracking system.



Fig. 3. The physical set-up of our acoustic-inertial tracking AR environment. On the ceiling there are six IS-900 SoniStrips which makes up a three meter by three meter area. A head tracker is mounted on the user's HMD and a camera is fixed on the head tracker. A wand tracker with four buttons and one joystick was held in the user's hand as an interaction device.

It tracks changes in orientation and position by integrating the outputs of its gyroscopes and accelerometers, and corrects drift by using a room-referenced ultrasonic time-of-flight range measuring system. It can obtain a resolution for position of 15 mm.

For the experimental system, as shown in Fig. 3, we mounted six IS-900 SoniStrips on the ceiling of a 3 meter by 3 meter space. This system can support up to four tracking stations. We used four tracking stations to track two users' heads and hands, respectively. A head tracker was mounted on the user's HMD and a camera is fixed on the head tracker. A wand tracker with four buttons and one joystick was held in the user's hand as an interaction device.

The system superimposes graphics on video sequences captured from the camera and displays the combined images on the HMD. We employed OpenAL (Loki Entertainment Software) for generating 3D sounds. Unlike the vision-based tracking method where we make the user's co-ordinates system as the reference, in this method, we used the IS-900 co-ordinates system as a reference while using the users' head position, orientation, and the virtual sound sources' 3D position as input parameters for the OpenAL software.

3. Experimental goals and subjects

Two experiments were taken in the two pre-mentioned AR environments, respectively. In the first experiment, our goal is to find out:

1. Whether 3D sound helps depth perception and by how much.
2. Whether the exaggeration of intensity difference of 3D sound will be acceptable or unacceptable psychologically.

In the second experiment, our goal is to find out:

1. Whether 3D sound helps in task performance, or more specifically, whether it helps to shorten a searching task completion time and by how much.
2. Whether 3D sound gives more immersive and realistic perception to the users and whether it helps the subject to distinguish different objects in AR environments.
3. Whether 3D sound increases the feeling of 'human presence and collaboration'.

Both qualitative and quantitative studies were conducted in each experiment. The study took place over a four-week period in the summer of 2002.

Forty subjects (13 females and 27 males) were each paid Singapore \$8 (approximately \$4 USD) per hour to participate in this study. All the participants were undergraduate students at the National University of Singapore. Most of them were freshmen or juniors majoring in computer engineering. The subjects were on average 21.3 years old and had used computer for 8.7 years. They were asked to mark from 1 to 7 about how often (1 means very often while 7 means very seldom) do they use computers and how often do they play games. The averages were 1.7 and 4.5 respectively, which means that they often use computers, but play games only occasionally. All of the subjects reported clear-vision and normal hearing abilities.

Each subject performed both experiments. However in the second experiment, 20 subjects (seven females and thirteen males) were asked to conduct the searching task with the aid of 3D sound while the other 20 subjects (6 females and 14 males) conducted the same task without the 3D sound. Before doing the experiments, all the subjects were given a brief introduction about AR and the tasks to be performed. Each of the subjects was given five minutes to initially try on the HMD and experience the 3D sound effect. After the experiments, all subjects were given 25 min to finish a questionnaire based on the experiments finished.

4. Experimental results

In this section we present the details of the evaluation studies of 3D sound effect and performance in our two AR environments described before

4.1. Experiment of the impact of 3D sound on depth judgment

4.1.1. Design and procedures

In this experiment, we examined the effect of 3D sound on helping users to judge the relative depth of objects in an AR environment (Fig. 4) implemented by vision-based tracking method. Users were required to tell the relative depth of the two markers upon which virtual objects were augmented. In order to precisely position the markers, we used a white board to hold the markers. We set the height of user's chair so that the markers



Fig. 4. The physical set-up of the experiment on depth judgment. The output of the computer VGA signal is sent to a monitor and HMD for display by a video converter. The user can only see from HMD while the monitor is for the use of the experimentalist. Two virtual telephones with different colors are augmented onto different markers respectively. The size of augmented objects is adjusted to about the same by adjusting the position of marker. Users are required to tell the relative depth of the two objects in the cases of with and without 3D sound aided.

and the eyes were at the same height. By this way we eliminated the vertical vision cue to depth perception—as the relative position on the same plane can tell the relative depth. This makes sense in AR environment since the augmented objects are not necessarily located on the same plane, and thus this cue is not commonly available. The relative position of the two markers was chosen carefully so that the two markers seem to be approximately of the same size in the camera's view. As described in Section 2.3.1, this will cause depth confusion and hence we can carefully decide the effectiveness of adding 3D sound to the virtual objects.

A preliminary study (Mereu, 1995) indicated that visually impaired users can use the sound environments to perceive depth and position in a 3D application. We hence propose that 3D sound could also be helpful in AR environment for people to perceive depth. To test this hypothesis, we implemented 3D sound in our AR environment and measured the accuracy of relative depth judgment of subject.

4.1.2. User interfaces

As shown in Fig. 4, we augmented the same shape virtual telephone with a different color on each of the markers. The virtual telephones were augmented with a 3D telephone sound that was produced to emanate from each virtual telephone. As explained in

Section 2, the intensity difference of 3D sound due to different depth of markers was exaggerated by a scaling factor. Subjects were asked to put on the headphone of HMD and perceive the difference of 3D sound when the marker was changed to different positions.

Every subject was required to perform 10 trials judging the relative depth of two telephones. Before every trial, the signal of the HMD is turned off so that the subject could not see how the markers were arranged. During that time, the user only sees black because the HMD is a nonoptical see through type. We placed the two different sized markers on the condition that the image size of the two objects are of about the same size, this can be observed by a monitor which is connected to the same VGA output as what the HMD is connected. Then the HMD is turned on and the subject was required to tell which telephone was nearer to him in the cases with and without 3D sound aided respectively. The possible answers are 'left', 'right' and 'uncertain'. We recorded the subjects' judgments and compared them with the correct answers for numerical analysis. We also asked some questions in the questionnaire for psychological analysis purpose.

4.1.3. Results

4.1.3.1. Performance. The chart in Fig. 5 provides a visual summary of the results of the depth judgment experiment. Fig. 5 compares the number of correct relative depth judgments in 10 trials for 40 subjects in the cases with 3D sound and without 3D sound aided respectively. It can be seen that judgments with 3D sound aided lead to 2.5 times as accurate (70.25 versus 28.25%) as those without 3D sound added.

Our expectation of this experiment was to evaluate the impact of 3D sound on depth judging accuracy. Using a 0.05 significant level, a one-way ANalysis Of VAriance (ANOVA) (Stockburger D, 1998) of the individual correct judgment times of each user was used. In this experiment, we obtained $F(1,39)=129.55$; $p<0.001$ which declares the result to be statistically significant. Thus we conclude that 3D sound does significantly help to increase the number of times of correct depth judgments.

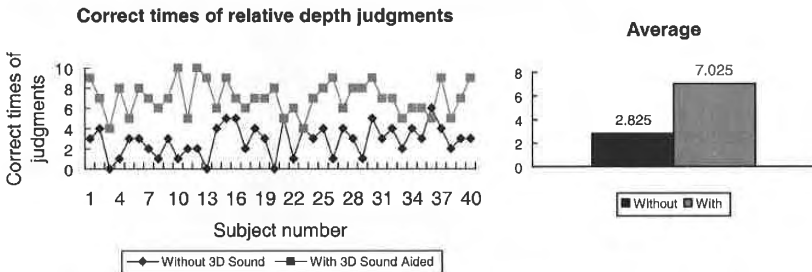


Fig. 5. Comparison of the correct depth judgment times of 40 subjects in ten trials in the cases of with and without 3D sound aided. From this chart we can see obviously that the accurate judgment times increase drastically by introducing 3D sound. The average of correct judgment times is increased from 2.825 to 7.025 by introducing 3D sound.

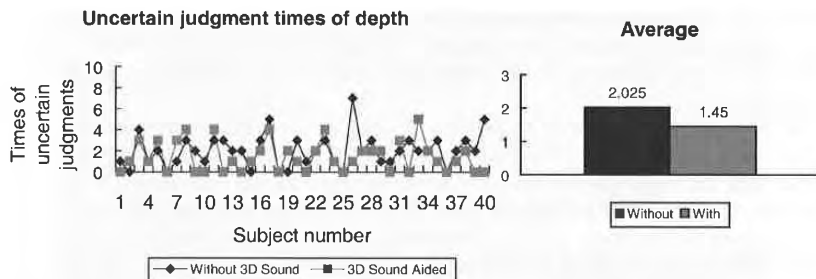


Fig. 6. Comparison of the uncertain judgments in the cases of with and without 3D sound aided. The average of uncertain judgment times is decreased from 2.025 to 1.45 by introducing 3D sound.

On the other hand, the addition of 3D sound decreases the uncertainty of relative depth judgment. Fig. 6 shows the comparison of uncertain judgment times between the cases of with and without 3D sound aided. The addition of 3D sound decreases the average uncertainty from $M=2.03$ to 1.45 times. A significant difference is found ($F(1,39)=4.24$; $p<0.05$). These results proved that the depth perception was significantly enhanced by 3D sound.

There was no significant difference found between the genders. For the correct judging times without 3D sound, males have a mean value of 2.67, females have a mean value of 3.15, $F(1,38)=0.9$; $p>0.1$. For the correct judging times with 3D sound aided, males have a mean value of 7.00, females have a mean value of 7.08, $F(1,38)=0.02$, $p>0.1$.

4.1.3.2. Questionnaire responses. The purpose of the questionnaire is to examine how the subject qualitatively judges the relative depth of augmented objects and how difficult the task is. Apart from the quantitative results we obtain from the above experiments, it is advantageous to know the subjective feeling of users due to the addition of 3D sound, and the process of the sound intensity exaggeration. The main questions in questionnaire about this experiment were as follows:

1. When you were supposed to judge the relative depth of the two markers, what cues did you mainly use the depth of markers (multiple choices are possible)?
A. brightness B. color C. size D. intuition E. background F. motion G. others
2. Do you think it is hard to tell the relative depth of two objects in this experiment without 3D sound? Please select your answer from the following choices:
A. very hard B. hard C. medium D. easy E. very easy
3. Overall, do you think 3D sound helps you to make a correct decision?
A. yes B. no C. uncertain
4. In real life situations, the intensity of sound doesn't change drastically when the sound source is moving within a short distance, say 100 mm. However, in our experiment we exaggerated this effect. Thus you perceived an obvious difference between the two markers when they were placed in a relative small different depth.

Do you feel it is unintuitive that the depth scale of 3D sound in this experiment has been exaggerated? Please select from the following choices about how you feel:

A. very unintuitive B. unintuitive C. medium D. intuitive E. very intuitive F. did not notice at all

Question 1 allows multiple choices. Every choice given by the user will be counted as a single vote to the selected choice. Although different users might tick different numbers of choices, the vote diagram is not severely disturb qualitatively since our purpose is to find out what are the cues most users will use for judging depth. As shown in Fig. 7(a), the 'size' cue was given the first place (30 votes) of all the cues in our question. This partially explains why

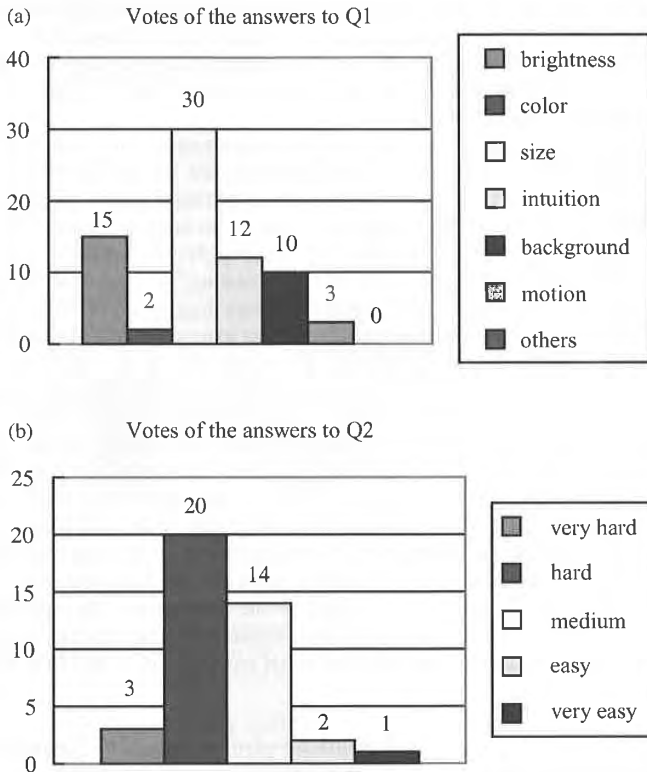


Fig. 7. Statistical charts of the answers to Question 1, 2 of Section 4.1.3 (a) The votes of the answers to question 1: When you were supposed to judge the relative depth of the two markers, what cues did you mainly use the depth of markers (can have multiple choices)? It can be seen from this chart that users are more likely to judge the depth of object by the size, brightness and the background cues. (b) The votes of the answers to question 2: Do you think it is hard to tell the relative depth of 2 objects in this experiment? It can be seen from this chart that it is hard to tell the relative depth of the two markers in our experimental AR environment.

it is difficult for subjects to judge the relative depth when two markers are almost of the same size. Our setting of AR environment in this experiment restrained the effect of background (ten votes) and motion (three votes). The cue 'brightness' which reects the cue 'light and texture gradient' obtains the second highest votes (15 votes). This gives us a hint that in order to obtain good depth perception, it is also important to adjust the appearance of virtual object so that it fits its surrounding physical lighting environment.

However, in this experimental system, the brightness of the object is predefined when the model was created. Hence it brings more difficulties for depth judgment, and it can not provide the cue 'light and texture gradient'. Therefore, this suggests that in the future research we can adjust the brightness of augmented objects according to its lighting environment so as to achieve better depth perception.

In response to question 2, most subjects claimed that it is hard (three claimed very hard and 20 claimed hard) to judge the relative depth of objects in this experiment without the 3D sound cues. Fig. 7(b) gives the chart of this result. This psychological feeling is in accordance with the results shown in Fig. 5 where the accuracy of judgment is only 28.25% in average for tests without sound.

There is an interesting result from the answers to question 3. Only 19 subjects thought that 3D sound has helped them however, 6 subjects claimed 'no' and 15 subjects claimed 'uncertain', as shown in Fig. 8(a) (one subject somehow forgot to give the answer to this question, thus only 39 votes are appeared in this chart). This implies that the addition of 3D sound may have contributed to the depth perception (Fig. 5) although the subject may not psychologically feel it. While this result is quite interesting, more detailed and long term psychological investigation needs to be conducted before drawing any reliable conclusions.

In question 4, our prospect is to find out whether our exaggeration of 3D sound will lead to a degrading of the perceptual experience. The result (Fig. 8(b)) shows that only one subject claimed that it is 'very unintuitive' and six subjects claimed that it is 'unintuitive'. Nine subjects claimed 'medium', 12 subjects claimed 'intuitive' and one subject claimed 'very intuitive'. Moreover, 11 subjects claimed that they 'didn't notice at all'.

Although there is still a risk of losing the 'realistic experience' since the 3D sound environment is different from our everyday life, this result suggests that most of the users will still feel the virtual scene is intuitive psychologically if the exaggeration scale is properly chosen. This result is critical to the development of 3D sound system in AR environment since, unlike in pure VR system, normally the exaggeration is required, otherwise we may lose the information carried by one dimension of 3D sound-the depth. This occurs especially when the physical AR environment is as small as our experimental game system or even smaller, as in the desktop AR environment of the depth perception experiment.

4.2. Experiment of 3D sound's impact on task completion time and the feeling of 'human presence and collaboration'

4.2.1. Design and procedures

In the second experiment, we examined the effect of 3D sound in a larger AR environment in the form of a simple game Barfield (Barfield et al., 1997) identified three primary benefits of auditory spatial information displays as: relieving processing demands

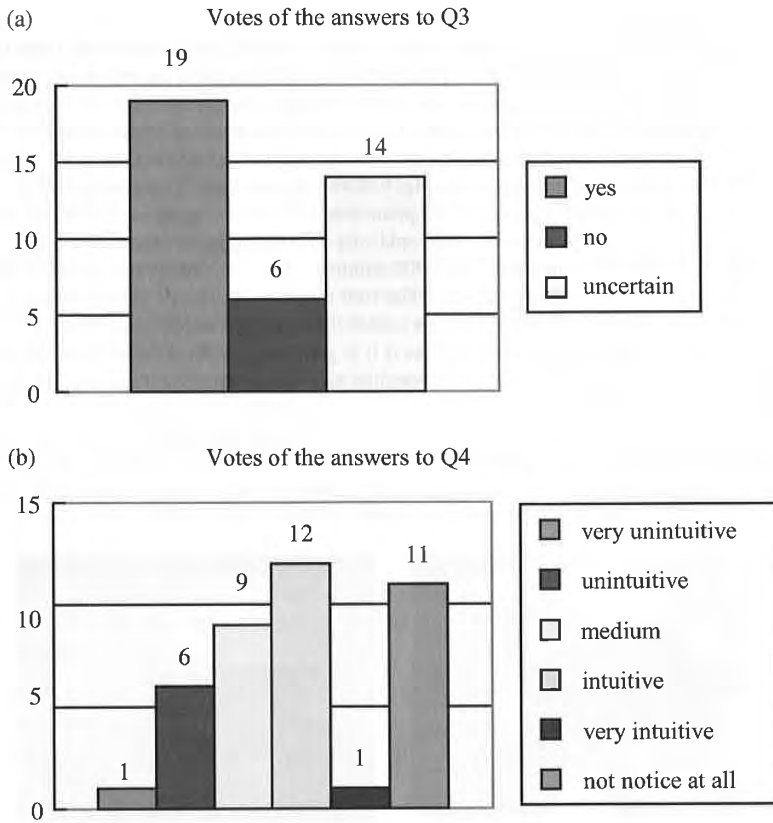


Fig. 8. Statistical charts of the answers to Question 3, 4 of Section 4.1.3. (a) The votes of the answers to question 3: Overall, do you think 3D sound help you to make a correct decision? (One subject somehow forgot to give answer to this question, thus only 39 votes are appeared in this chart). (b) The votes of the answers to question 4: In our every life, the intensity of sound doesn't change drastically when the sound source is moving within a short distance, say 100 mm. However, in our experiment we exaggerated this effect. Thus you perceived an obvious difference between the two markers when they were placed in a relative small different depth. Do you feel unintuitive that the depth scale of 3D sound in this experiment has been exaggerated?

on the visual modality, enhancing spatial awareness, and directing attention to important spatial events. In our research system, we extend the benefits in this experiment by:

1. helping to localize an object in AR environment when the visual modality is weakened;
2. enhancing the feeling of human collaboration;
3. directing attention to different spatial objects or helping user to identify different spatial objects.

4.2.2. User interface

Our experimental system allows two users to play a simple game at the same time. The objective of this game is to rescue the princess who was captured by an evil witch. In this experimental game, three stages were used to investigate the effects of 3D sound. In the first stage, users are allowed to walk around in a three by three meter region and to explore a virtual land augmented on the physical ground through a small rectangle virtual window displayed on the tracked wand. Fig. 9 shows the scrolling 3D landscape when the player is moving her hand. A small virtual plane is attached to the wand as an avatar for the user, as if the user is exploring the game space by manipulating the plane. The player is looking for the castle through the 'magic 3D window'. Two 3D sounds are applied in this stage and can be heard by both players. The first one is a 3D sound 'Help!' which was applied to the princess located inside the castle. The second sound is a constant buzz applied to the wand tracker of co-player as if it is generated by the engine of co-player's airplane. Each player can hypothetically localize his/her co-player by localizing the buzz sound.

In the first stage the player is allowed to become more and more familiar with the searching task and the perception of 3D sound. We purposely design this stage as a training process. When the player walks closer to the sound sources (the castle and the princess therein or the co-player), the sound becomes louder while it becomes softer

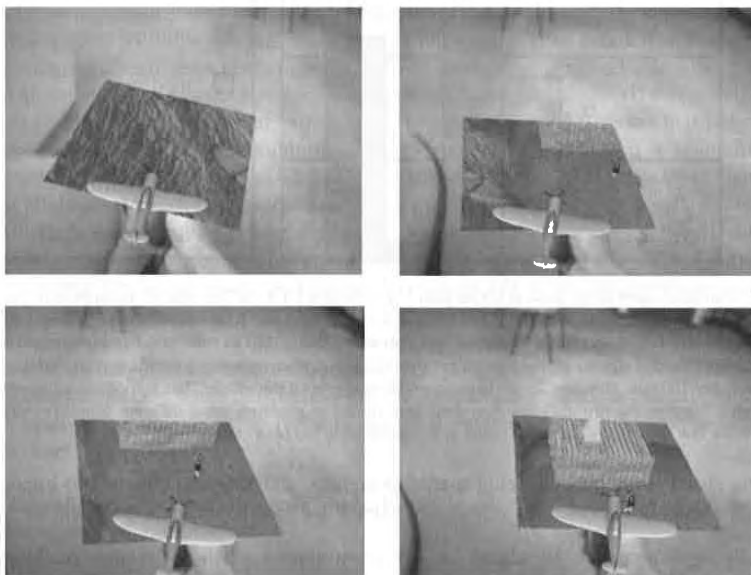


Fig. 9. Looking for the castle through a 'magic 3D window'. A virtual plane is augmented on the wand as an avatar for the user. A rectangle window is augmented in front of the wand through which the user can see the virtual land on the ground. When the user is moving around, the 3D landscape is also scrolled in the 'magic 3D window'. The user is looking down at the castle as if she is looking down from the sky in the airplane.

when the player walks away from the castle. An exaggeration of the intensity difference described in Section 2 was undertaken here as well. Furthermore, it should be noted, when the player rotates her head or body, she can perceive that the sound source is also moving relative to her movements. We updated the position and orientation of the head tracker 25 times per second which allows a quite smooth feeling of sound source movement.

After the castle is found, players move to the second stage. They battle with a virtual witch who has captured the princess. The virtual witch is augmented in the physical world and is hovering in the experimental region. Players can move freely in the physical space to get the best shooting angle and position. They need to reload or transfer their bullets by putting their wands together which encourages the collaboration in the game, as shown in first two frames of Fig. 10. Apart from the sounds used in stage one, we applied the other two 3D sounds, the cry of witch when it is hit and the explosion sound when it is exploded after being shot for 10 times.

After destroying the witch, the players can fly into the virtual scene and rescue the princess from the castle. This enables a seamless transition from AR environment to VR environment. After the user flies into the virtual scene, she enters a virtual environment in which players can use joystick on the wand to move around, while they can turn over their head or body to change the direction of viewpoint. In this stage we still keep the princess's cry 'help' but we change the sound of co-player from a buzz of engine into a footstep sound. Both of the players can be either in AR or VR mode and can continuously be aware of each other by both vision and sound. Fig. 11 shows the views in this stage.

To examine the impact of 3D sound on task completion time and subjective feelings in this AR environment, 3D sounds were applied in this experimental game. Their functions are summarized as follows:

1. *Players' sounds*: A constant buzz sound is applied to the co-player's airplane when the users are exploring the augmented land. Since the plane is attached to the wand, the 3D positions can be easily obtained from the tracker in the wand. By applying this sound, the user can always hear where is the location of the co-player, even when the co-player is not visually in the scene. She can still roughly tell to what direction is her co-player located and whether the co-player is getting closer or further to her. This buzzing sound is changed into a footstep sound when the co-player enters the VR environment. The different sound gives the hint of whether the co-player is in the AR or VR environment as well.
2. *Human voice*: A constant human voice 'Help! Help!' is applied to the princess which is the target of the searching task. This sound helps the player to turn and face to the correct direction and walk to the correct location where she can see the princess through the small window.
3. *Entertainment sounds*: To make the game more entertaining, we also applied other sound effects. A shooting sound is played when user press the shooting button on the wand. A scream sound and an explosion sound were played when the witch is destroyed. A landing sound of engine is played when the user transits from AR environment to VR environment. A female voice saying 'congratulations' and some greeting words was played when the user finished her mission-find the princess and rescue her.



Fig. 10. Two users are collaboratively fighting the witch hovering around them in the physical experimental area. The user can see the augmented virtual witch in three dimensions through HMD. The two users need to reload or transfer their 'bullets' by putting their wands together as shown in the first two frames. When the user pressing a specific button on the wand, the airplane can fire bullets (blue and green dot lines in the subsequent frames). The position and orientation of the wand are used to decide trajectory of 'bullets' and whether the witch is shot or not. In the last frame, the witch disappeared after being shot for ten times.

In this experiment, we took both numerical and psychological studies of the subjects' responses. After the players finished the game missions, they probably have been familiar with the game, an additional task is required to perform in stage one. Instead of searching the castle, they need to search for the princess by walking around and scrolling

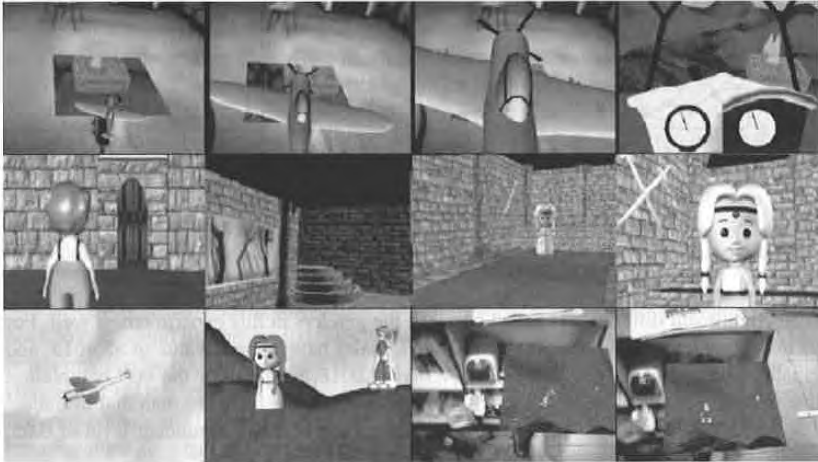


Fig. 11. Rescue the princess in the castle with co-player. (1) The first row shows the seamless transition from AR to VR that the user's airplane is 'flying into' and 'landing on' the VR world. (2) The second row shows one player's view when they are on the way to rescue the princess in the castle. The user uses the joystick to navigate however they can turn the body and head of the virtual character by physically turning their body and head. The footstep sound comes from the co-player and the 'Help!' scream of the princess can always be heard. (3) In the first frame of the third row, a user can physically look up in the sky to find her co-player who is still in AR mode (before flying into the VR mode). The user in the AR mode can still see the co-player and the princess by looking down to the land as if she is on the airplane. The second frame shows one player's view point when both of the players are in VR mode and come to the princess.

the window. The princess was taken outside the castle and was put at an open area on the land. Each subject was given a trial to see how the princess looks like in the small window. Then the princess was put at another position which is the same for all subjects. Every subject started from the same position and orientation in the space and began to search for the princess. The completion time of this searching task was recorded. Twenty subjects (7 females and 13 males) were asked to conduct the searching task with the aid of 'Help!' sound while the rest twenty subjects (6 females and 14 males) conducted the same task without any sound. Every subject performed this task only once either with or without sound aided. Apart from this numerical study, psychological studies were conducted by a linguistic questionnaire.

4.2.3. Results

4.2.3.1. Performance.. In this experiment the subjects performed a searching task as described in Section 4.2.2. The chart in Fig. 12 compares the completion time (in seconds) of the searching task for two groups in the cases with 3D sound and without 3D sound aided. The average task completion time of the group without 3D sound aided was 1.5 times as long (133.05 versus 88.1) as that with 3D sound aided. The effect of 3D sound on shorten the task completion time is significant, $F(1,38)=6.7$; $p<0.025$.

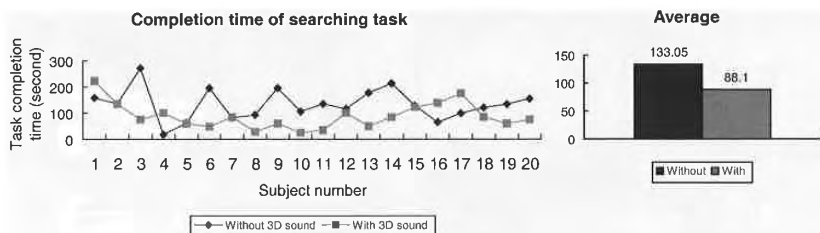


Fig. 12. The comparison of searching task completion time in the cases of with and without 3D sound aided. The average of completion time is shortened drastically from 133.05 to 88.1 s by introducing 3D sound.

No significant difference is found between the genders in this experiment as well. For the task completion time with 3D sound aided, males have a mean value of 88.4615, and females have a mean value of 87.43, $F(1,18)=0.0018$; $p>0.1$. For the task completion time without 3D sound aided, although females' mean value is higher than that of males' (166.33 versus 118.79), no significant difference is found at the significant level of 0.05, $F(1,18)=3.03$; $p>0.05$.

From the results given above we can see that, 3D sound helps significantly to shorten (about by half) the searching task completion time in this AR environment.

4.2.3.2. Questionnaire responses. The purpose of the questionnaire questions is to examine the impact of 3D sound on the subject's psychological feelings. We wanted to examine whether 3D sound improves the feeling of immersiveness and human presence and collaboration, whether it helps to identify spatial objects, and how much impact it has on these feeling. The main questions in questionnaire about this experiment were as follows:

1. Does 3D sound improve your perception of immersiveness in the AR environment? Do you think it is more realistic with 3D sound than without it? Why?
2. Does the 3D sound improve your feeling of human presence and collaboration as you can hear the sound coming from your collaborator at anytime?
3. Does the 3D sound help you to identify different information signals (spatial objects)?
4. Were you aware of your co-players in different places?
A. always B. very often C. often D. barely E. never
5. What has helped your feeling of 'human presence and collaboration'? (can be multiple choices, please order the factors by the order of decreasing importance)
A. small talk between co-players B. vision cues C. 3D Sound cues D. Others

According to question one, almost all subjects (39 of 40 subjects) claimed that 3D sound did improve the perception immersiveness. A total of 38 subjects claimed that it is more realistic with 3D sound, and one subject claimed 'a little better'. The main reasons they provided to support their viewpoint are as follows:

1. 'It is natural feeling and more realistic with 3D sound.'
2. 'You can feel the sound from all directions which gives a more 3D feeling.'

3. 'You can tell where the collaborator is positioned, or to know the surrounding objects in the AR environment.'
4. 'The feeling is closer to real world and 3D sound helps to navigate.'
5. 'I can hear and judge distance from the object producing the sound.'

From these responses, we can find that 3D sound does play an important role complementing the visual AR environment. Although this result seems to be natural since the same conclusion has been drawn in virtual reality environment (VRE), it proves that this conclusion is still tenable in AR environment when the implementation method has been changed and especially when the interfaces preserve our social interactions which are weak in VR.

There were also negative comments. One subject suggested that there should be more background sound like noises to make it more realistic. The subject said, 'The sound field is too quiet to be realistic.' In fact, this is consistent with the argument given by Begault (Begault, 1994): "Even with non-spatial cues, one can tell something about the distance of different sounds and their context,..., but the inclusion of 3-D sound techniques and spatial reverberation cues can greatly increase the immersiveness of a simulation, as well as the overall quality and the available nuance in representing different environmental contexts".

The important result we obtained from the responses to question two is that 3D sound improves the feeling of 'human presence and collaboration' when the subject is performing this experimental task. In this question, 39 of 40 subjects answered 'yes'. Some of the comments were:

1. 'At least I can find whoever it is.'
2. 'The sound constantly reminds us of the presence of the collaborator.'
3. 'Yes, like someone is actually in the world with you.'
4. 'It is really interesting that you can turn to face him when the clop-clop is getting closer to you in your back.'

One interesting comment was that 'I can know whether he is still in the airplane or has landed down and walking around' (which meant that the user could know if the other player was in AR or VR modes). This is actually one function of sound which is serving as an auditory icon (Gaver, 1986). A good negative comment suggested that 'it can be improved by adding speech communication, because a running motor does not sound very human, so it is like an object somewhat'.

Apart from applying 3D sound to the collaborator, we also applied 3D sound to the princess who is the target of the task. The responses to question three suggest that 3D sound, when applied to different spatial objects (information signals) in AR environment, can help the user to identify different information carriers. In our experiment 36 subjects claimed that they can constantly be aware of both the other collaborator and the princess simultaneously. This result suggests that by introducing more than one 3D virtual source sources in AR environment, it is possible for the users to identify different meanings of them and to distinguish them by the localization of the sound sources. As one subject described, 'yes, very much so. For instance, if the collaborator sounds from the left

earpiece and princess cries are heard at right earpiece, the directional news determines the positions of the collaborator and princess.'

However, one valuable criticism complained that 'the volume differs when you are far but when you are near I could not hear a difference especially in terms of direction', the other one complained that 'the sound sometimes seemed to be coming from all directions and I was uncertain whether to turn left/right, only when I was close did the volume increase, but in a jump, not gradually'. These comments points out the drawbacks of our exaggeration process of 3D sound intensity in this AR environment and also to some extend support the results of Brungart (Brungart and Rabinowitz, 1999; Brungart, 1999). We designed the auditory environment so that when the user becomes closer to the virtual sound source in the three by three meters region, the 3D sound intensity is exaggerated. This will be maximum intensity when the user is at the position of the virtual sound sources (distance to the object is zero). In this case, the binaural cues play a very important role for distance and direction perceptions. Because of the closeness to the object when near zero, even a slight movement of the user may cause a totally opposite feeling of the source direction (from left to right). When the movement is very fast, the intensity and sound direction may change rapidly. This problem can be partly solved by designing a better sound-scape. However the situation when the user is overlaid on the sound source is still a difficult problem unless we apply some physical constraints on the user's sound near to virtual sound sources.

Chart (a) and (b) in Fig. 13 shows the subjects' responses to question four and question five, respectively. We can see from chart (a) that nine of 40 subjects claimed that they were 'always' be aware of co-players while five subjects claimed 'very often' and 18 claimed 'often'. This leads to the improvement to the feeling of collaboration. A total of 39 subjects agreed that 3D sound did increase their feeling of collaboration from the result of question two.

To examine the importance of 3D sound among all cues, subjects were required to choose the cues they thought to have helped them and to order them by the importance. 3D sound cues obtained the highest votes (36 votes) among all the cues. More importantly, a total of 14 subjects regarded 3D sound cues as the most important cue while 'small talk' and 'vision cues' only obtained five and four votes respectively. This result suggests that 3D sound does play a very important role in improving the subject's feeling of collaboration. It could even dominate among all possible cues in AR environment, especially when other cues are restrained by hardware settings, for example, angle of view is restrained by HMD in common AR system. In this situation, the visual cues are restrained due to the narrow viewpoint of HMD, and hence their effects on collaboration are limited. On the contrary, the 3D sound can be generated from any points in the AR space. When 3D sound is applied to the user and given different meaning at different situations, it can play the most important role to help the user's feeling of 'human presence and collaboration'.

5. Conclusions

The purpose of this work is to investigate the effectiveness of 3D sound in AR environments We designed two experimental AR environments to study the effectiveness

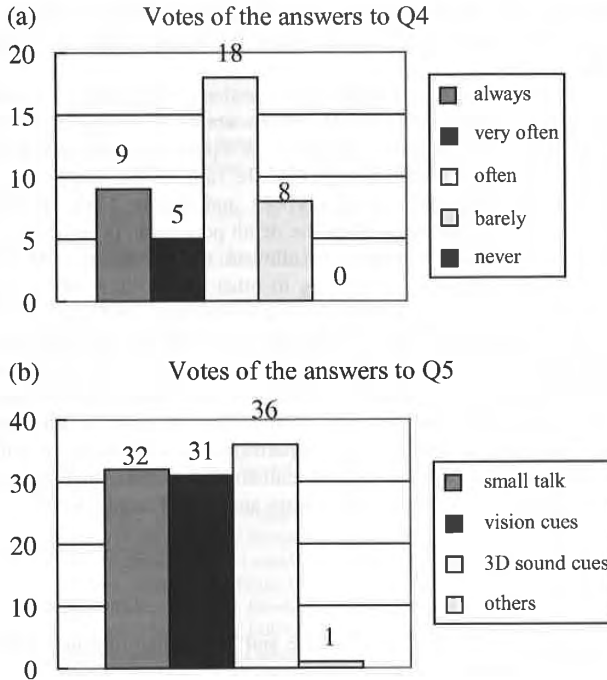


Fig. 13. Statistical charts of the answers to Question 4, 5 of Section 4.2.3. (a) The votes of the answers to question 4: Were you aware of your co-players in different places? We can see from the chart that in this AR environment, subjects can often be aware of co-player's position, however, this result is impossible if there was no 3D sound applied since the subject can only occasionally see co-player due to the narrow angle of view. (b) The votes of the answers to question 5: What has helped your feeling of 'human presence and collaboration'? It can be seen from this chart that 3D sound plays the most important role among all the cues. It gets even more votes than vision cues and voice communication cues.

both quantitatively and qualitatively. Two different tracking methods were applied to retrieve the 3D position of virtual sound sources. We examined the effects of 3D sound on improving depth perception and shortening task completion time. We also investigated 3D sound's effects on improving immersive and realistic perceptions, helping user to identify different spacial objects, and improving the subjective feeling of 'human presence and collaboration'.

The 3D sound generated by OpenAL (Loki Entertainment Software) applying HRTFs and simple modelling of environment is used in our experiments. Apart from its effects for the user on sound source localization, we tried to emphasize its effect on telling the depth (distance). Since intensity has been reported to be a key cue for distance perception, we exaggerated the intensity difference of sound sources in different depth by applying an additional scalar factor to the intensity of generated 3D sound. The user study result shows

that it is still 'intuitive'. These methods to implement 3D sound in relative small AR environments provide a necessary foundation for the incorporation of 3D sound with visual AR environments.

However, our studies beg many additional questions. For example, how to set the intensity scale so that it can maximize 3D sound's ability to tell depth and meanwhile preserve realistic perception for users? Moreover, as reported, for distance perception not only the intensity but also a much stronger cue, the ratio of the energies of direct and reflected sound is of importance (Middlebrooks and Green, 1991; Bronkhorst and Houtgast, 1999). How will this ratio affect the depth perception in AAR? If the cues of background and drastic head movements are allowed, to what extent will 3D sound be effective to help depth judgment, comparing to other visual cues? When the binaural localization cues for nearby sources (Brungart and Rabinowitz, 1999; Brungart, 1999) are taken into account, how to design the sound-scape to 'display' the 3D sound correctly and intuitively when the user is very close to or even right overlapped on the sound source?

Although many questions remain unanswered, our studies show that the addition of 3D sound can be a very effective way to complement the user experiences in AR environments. It helps depth perception, task performance and facilitates collaborations between users. Moreover, it enables a more realistic environment and more immersive feeling of being inside a both visual and auditory augmented reality world.

Acknowledgements

This work is supported by Defence Science and Technology Agency (DSTA), Land Systems Division, Singapore.

References

- Avionique S, Multipurpose auditory display for 3-d hearing applications. Online. <http://www.cordis.lu/esprit/src/22352.htm>.
- Azuma, R.T., 1997. A survey of augmented reality. *Presence: Teleoperators and Virtual Environments* 6 (4), 355–385.
- Barfield, W., Cohen, M., Rosenberg, C., 1997. Visual, auditory, and combined visual-auditory displays for enhanced situational awareness. *The International Journal of Aviation Psychology* 7 (2), 123–138.
- Begault, D., 1994. 3-D Sound for Virtual Reality and Multimedia. AP Professional, Boston.
- Bill G., Keith M. Hrtf measurements of a kemar dummy-head microphone, Tech. Rep. 280, MIT Media Laboratory Perceptual Computing Technical Report, May 1994.
- Billinghurst, M., Bowskill, J., Jessop, M., Morphet, J., 1998. A wearable spatial conferencing space *Proceedings of ISWC 98* 1998, pp. 76–83.
- Bronkhorst, A.W., Houtgast, T., 1999. Auditory distance perception in rooms. *Nature* 397, 517–520.
- Brungart, D.S., 1999. Auditory localization of nearby sources. iii. stimulus effects. *Journal of the Acoustical Society of America* 106 (6), 3589–3602.
- Brungart, D.S., Rabinowitz, W.M., 1999. Auditory localization of nearby sources. Head-related transfer functions. *Journal of the Acoustical Society of America* 106 (3), 1465–1479.
- Cheok, A.D., Yang, X., Zhou, Z., Billinghurst, M., Kato, H., 2004. Touch-space: Mixed reality game space based on ubiquitous, tangible, and social computing. *Personal and Ubiquitous Computing* 2002. Vol. 6 2004 pp. 430.

- Cohen, M., Aoki, S., Koizumi, N., 1993. Augmented audio reality: telepresence/VR hybrid acoustic environments Proceedings of the Workshop on Robot and Human Communication 1993, pp. 3.61–64.
- Eckel, G., Banissi, B., Khosrowshahi, F., Sarfraz, M., Ursyn, A., 2001. Immersive audio-augmented environments—the listen project. Proceedings of the Fifth International Conference on Information Visualization (IV2001) 2001.
- Feiner, S., MacIntyre, B., Haupt, M., Solomon, E., 1993. Windows on the world: 2d windows for 3d augmented reality: 2d windows for 3d augmented reality Proceedings of UIST '93 1993, pp. 1.45–1.55.
- Fuhrmann, A., Hesian, G., Faurc, F., Gervautz, M., 1999. Occlusion in collaborative augmented environments. *Computers and graphics* 23, 809–819.
- Gaver, W., 1986. Auditory icons: using sound in computer interfaces. *Human Computer Interaction* 2 (1), 166–177.
- Gaver, W.W., Smith, R.B., O'Sheak, T., 1991. Effective sounds in complex systems: the arkola simulation. Proceedings of CHI '91 1991, 85–90.
- InterSense, Is-900, online. <http://www.intersense.com/>.
- Kanbara, M., Yokoya, N., 2002. Geometric and photometric registration for real-time augmented reality. IEEE and ACM International Symposium on Mixed and Augmented Reality 2002.
- Kanbara, M., Fujii, H., Takemura, H., Yokoya, N., 2000. A stereo vision-based augmented reality system with an inertial sensor Proceedings of IEEE and ACM International Symposium on Augmented Reality (ISAR) 2000, pp. 97–100.
- Kato, H., Billinghurst, M., 1999. Marker tracking and hmd calibration for a video-based augmented reality conferencing system Proceedings of the Second IEEE and ACM International Workshop on Augmented Reality 1999, pp. 85–94.
- Langendijk, E.H.A., Bronkhorst, A.W., 2000. Fidelity of three-dimensional sound reproduction using a virtual auditory display. *Journal of the Acoustical Society of America* 107 (1), 528–537.
- L. Firelight Technologies, Pty, fmod, music and sound effects system. [Online]. Available: <http://www.fmod.org/>.
- Loki Entertainment Software, Openal SDK. [Online]. Available: <http://www.openal.org>.
- Makino, H., Ishii, I., Nakashizuka, M., 1996. Development of navigation system for the blind using gps and mobile phone combination Proceedings of 18th Conference of IEEE, EMBS, vol. 18 1996, pp. 1–5.
- Mereu S.W., Improving depth perception in 3d interfaces with sound, Tech. Rep. CS95-35, Waterloo, Canada, 1995.
- Middlebrooks, J.C., Green, D.M., 1991. Sound localization by human listeners. *Annual Review of Psychology* 42, 135–159.
- Milgram, P., Takemura, H., Utsumi, A., Kishino, F., 1994. Augmented reality: a class of displays on the reality-virtuality continuum. *Telemanipulator and Telepresence* 2351.
- Mynatt, E.D., Back, M., Want, R., Frederick, R., 1997. Audio aura: light-weight audio augmented reality Proceedings of the UIST '97 User Interface Software and Technology Symposium 1997, pp. 21.1–2.
- Neumann, U., You, S., 1999. Natural feature tracking for augmented reality. *IEEE Transactions on Multimedia* 1 (1), 53–64.
- Poupyrev, I., Airola, C., Billinghurst, M., Kato, H., 2000. Augmented groove: collaborative jamming in augmented reality. *ACM SIGGRAPH Abstracts and Applications* 2000, 2000, 77.
- Schmandt, C., 1998. Audio hallway: a virtual acoustic environment for browsing Proceedings of UIST '98 1998, pp. 1.63–70.
- Stockburger D.W. Introductory statistics: Concepts, models and applications. online, 1998. <http://www.psychstat.smsu.edu/introbook/sbk00.htm>.
- Sutherland, I.E., 1968. A head-mounted three dimensional display. Proceedings of the AFIPS Fall Joint Computer Conference 33, 7.57–7.64.
- Takagi, A., Yamazaki, S., Saito, Y., Taniguchi, N., 2000. Development of a stereo video see-through hmd for ar systems Proceedings of IEEE and ACM International Symposium on Augmented Reality (ISAR) 2000, pp. 68–77.
- Wang, W., Yang, X., Cheok, A.D., 2002. Touch space: an embodied computing mixed reality game space. *International Workshop on Entertainment Computing (IWEC 2002)* 2002, 4.55–4.62.
- Wenzel, E.M., 1994. Spatial sound and sonification, in: Kramer, G (Ed.), *Auditory display: sonification, audification, and auditory interfaces*, pp. 127–150.

- Wenzel, E.M., 1996. Research in virtual acoustic displays at nasa Proceedings of the Simulation Technology and Training Conference (SimTecT'96) 1996, pp. 85–90.
- Wenzel, E.M., Wightman, F.L., Foster, S.H., virtual, A., 1988. A virtual display system for conveying three-dimensional acoustic information Proceedings of the Human Factors Society, 32 1988, pp. 86–90.
- Wloka, M.M., Anderson, B.G., 1995. Resolving occlusion in augmented reality Proceedings of the 1995 symposium on Interactive 3D graphics 1995, pp. 5–12.
- Zhou, Z., Fabiz, F., Chen, X., Cheok, A.D., 2002. Magic music desk: a multi-modal embodied interactive desk International Workshop on Entertainment Computing (IWEC2002) 2002, pp. 4.23–30.

Contents

Computer Literature Index, Current Contents, Current contents/Compumath, Ergonomics Abstracts, HCI Abstracts, IHCS (International Journal of Human Computer Studies), INSPEC Computer and Control Abstracts, Information Science Abstracts, KBS (Knowledge Based Systems), Linguistics and Language Behavior Abstracts, PsycINFO Psychological Abstracts, Research Alert, SCISEARCH, Science Citation Index, Social Planning/Policy and Development Abstracts, Sociological Abstracts.

Special Issue: Physiological Computing

(Includes Regular Papers)

Editorial	851
Winslow Burleson	
A research agenda for physiological computing	857
Jennifer Allanson and Stephen H. Fairclough	
An analysis of facial movement tracking in ordinary human-computer interaction	879
Robert Ward	
On physiological computing with an application in interactive art	897
Ernest Edmonds, Dave Everitt, Michael Macaulay and Greg Turner	
A platform for wearable physiological computing	917
Astro Teller	
Regular Papers	
Desktop virtual environments: a study of navigation and age	939
H. Sayers	
Investigating actability dimensions: a language/action perspective on criteria for information systems evaluation	957
Pär J. Ågerfalk	
An experimental study on the role of software synthesized 3D sound in augmented reality environments	989
Zhiying Zhou, Adrian David Cheok, Xubo Yang and Yan Qiu	

For more information visit the journal homepage <http://www.elsevier.com/locate/intcom>

Interacting with Computers is the journal of the British HCI Group, a Specialist Group of the British Computer Society



0953-5438(200410)16:5;1-I

APPENDIX

1011C

LIBRARY

CATALOG

←

<

1 of 1

>

PERIODICAL OR NEWSPAPER

Interacting with computers

Full RecordMARC Tags

Main title
Interacting with computers.

Published/Created
Guildford, Surrey : Butterworths, c1989-

Request this Item

 LC Find It

More Information >

LCCN Permalink	https://lccn.loc.gov/89658522
Publication history	Vol. 1, no. 1 (Apr. 1989)-
Description	v. ; 25 cm.
Current frequency	Six no. a year, 1999-
Former frequency	Three times a year, 1989-1998
ISSN	0953-5438
Linking ISSN	0953-5438

LC classification	QA76.9.H85 I59
Serial key title	Interacting with computers
Abbreviated title	Interact. comput.
Related names	British Computer Society. Human Computer Interaction Specialist Group.
LC Subjects	Human-computer interaction--Periodicals.
Other Subjects	Mens-computer-interactie. Human-computer interaction.
Form/Genre	Periodicals. Periodicals.
Browse by shelf order	QA76.9.H85
Notes	Title from cover. Issues for <1999-> published by Elsevier. Issued by: British Computer Society, Human Computer Interaction Specialist Group.
Additional formats	Also issued online. Online version: Interacting with computers (Online) (DLC) 2007242072 (OCoLC)38995456 Online version: Interacting with computers (OCoLC)607494777
LCCN	89658522
CODEN	INTCEE
Dewey class no.	004/.01/9
National bib agency no.	100971603
Other system no.	(OCoLC)ocm20745502
Additional Links	http://www.sciencedirect.com/science/journal/09535438
Type of material	Periodical or Newspaper
Source of description	Latest issue consulted: Surrogate of Jan. 2003.

Item Availability



<https://catalog.loc.gov/vwebv/search?searchArg1=0953-5438&argType1=all&searchCode1=KNUM&searchType=2&combine2=and&searchArg2=&argType2=all&s...> 2/3

CALL NUMBER [QA76.9.H85 I59](#)
Set 1

Request in Jefferson or Adams Building Reading Rooms

Status Not Charged

Older receipts v.1:no.1-v.2:no.1 (1989:Apr.-1990:Apr.), v.2:no.3 (1990:Dec.), v.3:no.2 (1991:Aug.), v.4-v.11 (1992:Apr.-1998:Dec.)
v.11 (1999:Apr.-1999:Sept.), v.12 (1999:Nov.-2000:Apr.), v.13 (2000:Oct.-2001:Aug.), v.14:issue.1-v.14:issue.3 (2001:Dec.-2002:Apr.), v.14:issue 5-v.29:issue 6 (2002:Oct.-2017:Nov.)

CALL NUMBER [QA76.9.H85 I59](#)
Set 2

Request in Jefferson or Adams Building Reading Rooms

Status Not Charged

Older receipts v.24-v.25:no.5 (2012-2013:Sept.)

CALL NUMBER [QA76.9.H85 I59](#)
Copy 1
Unbound issues

Request in Newspaper & Current Periodical Reading Room (Madison LM133)

Status Not Charged

Latest receipts v. 30, issue 5 (2018 Sept.)
v. 30, issue 4 (2018 July)
v. 30, issue 3 (2018 May)
v. 30, issue 2 (2018 Mar.)
v. 30, issue 1 (2018 Jan.)

LIBRARY | CATALOG

← 1 of 1 →

PERIODICAL OR NEWSPAPER

Interacting with computers

[Full Record](#)

[MARC Tags](#)

000	02900cas a2200685 a 4500
001	11363406
005	20200730090955.0
007	cr unu
008	891207c19899999enkbx p 0 a0eng
010	— a 89658522
016	7_ a 100971603 2 DNLM
022	— a 0953-5438 l 0953-5438 2 z
030	— a INTCEE
035	— a (OCoLC)ocm20745502
040	— a DLC b eng c DLC d WAU d DLC d NSD d NST d CAS d ELM d COO d NSD d CU S d NLM d NSD d OCLCQ d NLGGC d GUA d OCLCQ d OCLCO d OCLCQ d OCLCF d OCLCO d GILDS
042	— a pcc a nsdp
050	00 a QA76.9.H85 b I59
082	00 a 004/.01/9 2 20
210	0_ a Interact. comput.
222	_0 a Interacting with computers
245	00 a Interacting with computers.
249	0_ i ACQUIRE Title: a Interacting with computers / British Computer Society Human Computer Interaction Specialist Group
260	— a Guildford, Surrey : b Butterworths, c c1989-
300	— a v. ; c 25 cm.
310	— a Six no. a year, b 1999-

321	—	a Three times a year, b 1989-1998
362	0_	a Vol. 1, no. 1 (Apr. 1989)-
500	—	a Title from cover.
500	—	a Issues for <1999-> published by Elsevier.
530	—	a Also issued online.
550	—	a Issued by: British Computer Society, Human Computer Interaction Specialist Group.
588	—	a Latest issue consulted: Surrogate of Jan. 2003.
590	—	a SERBIB/SERLOC merged record
592	—	a ACQN: aq 96007563
592	—	a KP1; QA76.9.H85I59;
650	_0	a Human-computer interaction v Periodicals.
650	17	a Mens-computer-interactie. 2 gtt
650	_7	a Human-computer interaction. 2 fast 0 (OCoLC)fst00963494
655	_7	a Periodicals. 2 fast 0 (OCoLC)fst01411641
655	_7	a Periodicals. 2 lcgft
710	2_	a British Computer Society. b Human Computer Interaction Specialist Group.
776	08	i Online version: t Interacting with computers (Online) w (DLC) 2007242072 w (OCoLC)38995456
776	08	i Online version: t Interacting with computers w (OCoLC)607494777
850	—	a CSt a CU-SB a DLC a MiU a NIC a WaU
859	41	u http://www.sciencedirect.com/science/journal/09535438
890	—	a Interacting with computers. i 89-658522
906	—	a 7 b cbc c serials d 3 e ncip f 19 g n-oclcserc
920	—	a Keep 2
984	—	a srvf
985	—	e eserial 200406
991	—	b c-GenColl h QA76.9.H85 i I59 w SERIALS
991	—	b c-GenColl h QA76.9.H85 i I59 p 00033793984 t Copy 1 v 1 * 1989 w CCF
991	—	b c-GenColl h QA76.9.H85 i I59 p 00033793947 t Copy 1 v 2-3: INCOMPLETE * 1990 -91: AP w CCF
991	—	b c-GenColl h QA76.9.H85 i I59 p 00033819614 t Copy 1 v 4 * 1992 w CCF
991	—	b c-GenColl h QA76.9.H85 i I59 p 00033793868 t Copy 1 v 6 * 1994 w CCF
991	—	b c-GenColl h QA76.9.H85 i I59 p 00008928113 t Copy 1 v 7 * 1995 w CCF
991	—	b c-GenColl h QA76.9.H85 i I59 p 00054008193 t Copy 1 v 8 * 1996 w CCF
991	—	b c-Ser w ACQUIRE
992	—	b EMPTY w ACQUIRE
992	—	b SER w SERLOC

[Request this Item](#)[LC Find It](#)

Item Availability



CALL NUMBER [QA76.9.H85 I59](#)
Set 1

Request in Jefferson or Adams Building Reading Rooms

Status Not Charged

Older receipts v.1:no.1-v.2:no.1 (1989:Apr.-1990:Apr.), v.2:no.3 (1990:Dec.), v.3:no.2 (1991:Aug.), v.4-v.11 (1992:Apr.-1998:Dec.)
v.11 (1999:Apr.-1999:Sept.), v.12 (1999:Nov.-2000:Apr.), v.13 (2000:Oct.-2001:Aug.), v.14:issue.1-v.14:issue.3 (2001:Dec.-2002:Apr.), v.14:issue 5-v.29:issue 6 (2002:Oct.-2017:Nov.)

CALL NUMBER [QA76.9.H85 I59](#)
Set 2

Request in Jefferson or Adams Building Reading Rooms

Status Not Charged

Older receipts v.24-v.25:no.5 (2012-2013:Sept.)

CALL NUMBER [QA76.9.H85 I59](#)
Copy 1
Unbound issues

Request in Newspaper & Current Periodical Reading Room (Madison LM133)

Status Not Charged

Latest receipts v. 30, issue 5 (2018 Sept.)
v. 30, issue 4 (2018 July)
v. 30, issue 3 (2018 May)
v. 30, issue 2 (2018 Mar.)

v. 30, issue 1 (2018 Jan.)

APPENDIX

1011D

UNIVERSITY OF MICHIGAN

DEC 02 2004


MICHIGAN
AAE LIBRARY

Interacting with Computers

***The Interdisciplinary Journal of
Human-Computer Interaction***

Special Issue
Physiological Computing
(Includes Regular Papers)

Also available on

SCIENCE  DIRECT®

www.sciencedirect.com

Elsevier



INTERACTING WITH COMPUTERS

Volume 16 (2004)

Special Issue

Physiological Computing

Guest Editor:

Winslow Burleson

MIT Media Laboratory
20 Ames Street
Cambridge, MA 02139, USA
E-mail: win@media.mit.edu

UNIVERSITY OF MICHIGAN

DEC 02 2004

MICHIGAN
AAE LIBRARY



ELSEVIER

Amsterdam – Boston – Jena – London – New York – Oxford – Paris – Philadelphia – St. Louis

Interacting with Computers is an international journal published by Elsevier B.V.

<http://www.elsevier.com/locate/intcom>

Address for submissions: Papers may be submitted to the General Editor.

Subscription enquiries and orders: Elsevier B.V., Order Fulfilment Department, PO Box 211, 1000 AE Amsterdam, The Netherlands. Tel.: +31 (20) 485 3642; Fax: +31 (20) 485 3598.

Annual institutional subscription rates 2004 (6 issues): Associated personal subscription rates are available on request for those whose institutions are library subscribers. Non-VAT registered customers in the European Community will be charged the appropriate VAT in addition to the price listed. Prices include postage and insurance and are subject to change without notice.

Back issues: are available from Oxford Fulfilment Centre, Elsevier Ltd, The Boulevard, Langford Lane, Kidlington, Oxford OX5 1DX, UK. Tel.: +44 (0)1865 843699; Fax: +44 (0)1865 843911; e-mail: journals@elsevier.co.uk

Advertising information: Advertising orders and enquiries may be sent to: **Europe and ROW:** Miss Katrina Barton, Commercial Sales, Elsevier, 84 Theobald's Road, London, WC1X 8RR; phone: (+44) (0) 20 7611 4117; fax: (+44) (0) 20 7611 4463; e-mail: commercialsales@elsevier.com. **USA, Canada and South America:** Mr Tino DeCarlo, Elsevier Inc., The Advertising Department, 360 Park Avenue South, New York, NY 10010-1710, USA; phone: (+1) (212) 633 3815; fax: (+1) (212) 633 3820; e-mail: t.decarlo@elsevier.com. **Japan:** The Advertising Department, Elsevier K.K., 4F Higashi-Azabu, 1-Chome Bldg, 1-9-15 Higashi-Azabu, Minato-ku, Tokyo 106-0044, Japan; phone: (+81) (3) 5561 5037; fax: (+81) (3) 5561 5047; e-mail: jp.info@elsevier.com.

Microfilm: A microfilm version of *Interacting with Computers* is available from University Microfilms Inc., 300 N. Zeeb Road, Ann Arbor, MI 48106-1346, USA.

USA mailing notice: *Interacting with Computers* (ISSN 0953-5438) is published bi-monthly in January, March, May, July, September and December by Elsevier B.V. (P.O. Box 211, 1000 AE Amsterdam, The Netherlands). Annual subscription price in the USA US\$ 779 (valid in North, Central and South America), including air speed delivery. Application to mail at periodical postage rate is pending at Jamaica, NY 11431.

USA POSTMASTER: Send address changes to *Interacting with Computers*, Publications Expediting Inc., 200 Meacham Ave, Elmont, NY 11003.

AIRFREIGHT AND MAILING in the USA by Publications Expediting Inc., 200 Meacham Avenue, Elmont, NY 11003.

Copyright © 2004 Elsevier B.V. All rights reserved

This journal and the individual contributions contained in it are protected by the copyright of Elsevier B.V. and the following terms and conditions apply to their use.

Photocopying

Single photocopies of single articles may be made for personal use as allowed by national copyright laws. Permission of the publisher and payment of a fee is required for all other photocopying, including multiple or systematic copying, copying for advertising or promotional purposes, resale, and all forms of document delivery. Special rates are available for educational institutions that wish to make photocopies for non-profit educational classroom use.

Permissions may be sought directly from Elsevier's Rights Department in Oxford, UK; phone (+44) 1865 843830, fax: (+44) 1865 853333, e-mail: permissions@elsevier.com. Requests may also be completed on-line via the Elsevier home page (<http://www.elsevier.com/locate/permissions>).

In the USA, users may clear permissions and make payment through the Copyright Clearance Center, Inc., 222 Rosewood Drive, Danvers, MA 01923, USA; phone: (978) 7508400, fax: (978) 7504744, and in the UK through the Copyright Licensing Agency Rapid Clearance Service (CLARCS), 90 Tottenham Court Road, London W1P 0LP, UK; phone: (+44) 171 631 5555, fax: (+44) 171 631 5500. Other countries may have a local reprographic rights agency for payments.

Derivative Works

Subscribers may reproduce tables of contents or prepare lists of articles including abstracts for internal circulation within their institutions. Permission of the publisher is required for resale or distribution outside the institution.

Permission of the publisher is required for all other derivative works, including compilations and translations.

Electronic Storage or Usage

Permission of the publisher is required to store or use electronically any material contained in this journal, including any article or part of an article. Contact the publisher at the address indicated.

Except as outlined above, no part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without prior written permission of the publisher.

Address permissions requests to: Elsevier Rights Department, at the fax and e-mail addresses noted above.

Notice

No responsibility is assumed by the Publisher for any injury and/or damage to persons or property as a matter of products liability, negligence or otherwise, or from any use or operation of any methods, products, instructions or ideas contained in the material herein. Because of rapid advances in the medical sciences, in particular, independent verification of diagnoses and drug dosages should be made. Although all advertising material is expected to conform to ethical (medical) standards, inclusion in this publication does not constitute a guarantee or endorsement of the quality or value of such product or of the claims made of it by its manufacturer.

© The paper used in this publication meets the requirements of ANSI/NISO Z39.48-1992 (Permanence of Paper).

Printed in The Netherlands

Interacting with Computers: the Interdisciplinary Journal of Human–Computer Interaction

Volume 16 Issue 5 October 2004

Special Issue (Includes Regular Papers)
Physiological Computing

Editorial

Winslow Burleson 851

A research agenda for physiological computing

Jennifer Allanson and Stephen H. Fairclough 857

An analysis of facial movement tracking in ordinary human–computer interaction

Robert Ward 879

On physiological computing with an application in interactive art

Ernest Edmonds, Dave Everitt, Michael Macaulay and Greg Turner 897

A platform for wearable physiological computing

Astro Teller 917

Regular Papers

Desktop virtual environments: a study of navigation and age

H. Sayers 939

Investigating actability dimensions: a language/action perspective on criteria for information systems evaluation

Pär J Ågerfalk 957

An experimental study on the role of software synthesized 3D sound in augmented reality environments

Zhiying Zhou, Adrian David Cheok, Xubo Yang and Yan Qiu 989

For more information visit the journal homepage <http://www.elsevier.com/locate/intcom>

Interacting with Computers is the journal of the British HCI Group,
a Specialist Group of the British Computer Society



An experimental study on the role of software synthesized 3D sound in augmented reality environments

Zhiying Zhou, Adrian David Cheok*, Xubo Yang, Yan Qiu

Department of Electrical and Computer Engineering, National University of Singapore, Singapore 117576

Received 19 January 2004; revised 17 April 2004; accepted 17 June 2004

Available online 5 August 2004

Abstract

Investigation of augmented reality (AR) environments has become a popular research topic for engineers, computer and cognitive scientists. Although application oriented studies focused on audio AR environments have been published, little work has been done to vigorously study and evaluate the important research questions of the effectiveness of 3D sound in the AR context, and to what extent the addition of 3D sound would contribute to the AR experience.

Thus, we have developed two AR environments and performed vigorous experiments with human subjects to study the effects of 3D sound in the AR context. The study concerns two scenarios. In the first scenario, one participant must use vision only and vision with 3D sound to judge the relative depth of augmented virtual objects. In the second scenario, two participants must co-operate to perform a joint task in a game-based AR environment.

Hence, the goals of this study are (1) to access the impact of 3D sound on depth perception in a single-camera AR environment, (2) to study the impact of 3D sound on task performance and the feeling of ‘human presence and collaboration’, (3) to better understand the role of 3D sound in human-computer and human–human interactions, (4) to investigate if gender can affect the impact of 3D sound in AR environments. The outcomes of this research can have a useful impact on the development of audio AR systems which provide more immersive, realistic and entertaining experiences by introducing 3D sound. Our results suggest that 3D sound in AR environment significantly improves the accuracy of depth judgment and improves task performance. Our results

* Corresponding author. Tel.: +6874-6850; fax: +6779-1103.

E-mail address: adriancheok@nus.edu.sg (A.D. Cheok).

also suggest that 3D sound contributes significantly to the feeling of ‘human presence and collaboration’ and helps the subjects to ‘identify spatial objects’.

© 2004 Published by Elsevier B.V.

Keywords: 3D sound; Augmented reality; Depth perception; Localization of sound; Task performance; Collaboration; User studies

1. Introduction

Audio feedback, especially 3D sound, has proven itself to be an effective addition to human–computer interfaces in many studies. Sounds can be used to present information that would otherwise be difficult to convey through other means (Gaver et al. 1991). Moreover, 3D sound can convey location information for specific alerts or warnings. Also, 3D sound was reported to increase the immersive experience in virtual reality (VR) environments and hence provide a more realistic virtual environment (Begault 1994). Furthermore, the addition of 3D sound has been shown to increase the performance in active tasks (Wenzel, 1996; Avionique). In previous works, Mereu (1995) suggested that sound could improve depth perception in 3D interfaces. Makino et al. (1996) also indicated that spatialized sound from virtual acoustic display helps fast and accurate navigation. Additionally, simulations by Gaver et al. (1991) suggested that auditory icons can play a significant role in multiprocessing and collaborative system. Unlike VR in which extensive research has been carried on 3D sound, augmented reality (AR) aided by 3D sound is still a relative new research area.

AR, as placed on the reality–virtuality continuum (Milgram et al., 1994), refers to the incorporation of virtual computer graphics objects into a real world scene, or alternatively the inclusion of real world elements into a virtual environment. The former case is generally referred to as AR, and the latter as augmented virtuality. Azuma (1997) has defined three characteristics that are integral to an AR interface. First, it combines the real and the virtual. Second, it is interactive in real time. Third, it is registered in three dimensions. Although AR is often associated with visualization (starting with the first head-mounted display by Sutherland (1968)), augmentation is also possible in the aural domain (Cohen et al., 1993; Mynatt et al., 1997). If we extend this notion to include sonic effects, a real-time registered three dimensional (3D) sound could also be a paradigm of AR applications, and is termed augmented audio reality (AAR) (Cohen et al., 1993).

A few applications have applied 3D sounds in AR to enhance user experiences. Billingham et al. (1998) presented a prototype wearable communication space that uses spatial visual and audio cues to enhance communication between remote groups of people. The ‘Listen Project’ (Eckel et al., 2001) provides users with intuitive access to personalize and situated audio information spaces while they naturally explore everyday environments. It augments the physical environment through a dynamic sound-scape, which users experience over motion-tracked wireless headphones. The ‘Magic Music Desk’ (Zhou et al., 2002) registered virtual sound sources on fiducial markers from which 3D position information was retrieved by vision-based tracking method (Kato and Billingham, 1999). ‘Touch space’ (Cheok et al., 2004) applied different 3D sounds to represent different

moving avatars in AR environment. Although there are quite a few AAR applications, the effectiveness of 3D sound in AAR has been rarely investigated. The particular research problems and questions that arise are:

1. Exact spatial 3D sound in virtual and augmented environments requires perceptual externalization of the sound source, which can only be brought about by using head related transfer functions (HRTFs) (Bill G, 1994) (these are tuned to each individual), reflections, reverberation, etc. (Wenzel, 1994) which might be too complex to be included in normal real time AR applications (which need to be a real time interactive system for any user without individual training). An alternative way to generate 3D sound is to use open source software development kits (SDKs) which have already incorporated the general HRTFs database and simple model of environment to generate 3D sound. The minimum requirement of these SDKs to generate 3D sound is to update the relative position of the virtual sound source to the head co-ordinate system. Thus, with such sound sources, a problem turns to be how can we track the sound source relative to user's head co-ordinate system.
2. How can we precisely register virtual sound sources in the physical world? More specifically, what kind of tracking method is suitable for obtaining precise position and orientation of the sound source in AR environments?
3. As 3D sound has been reported to improve depth perception (Mereu S, 1995) in 3D interfaces, will this argument stand in AR environment? If so, how can we investigate the effect of 3D sound? For example, what measures can be defined to quantify the performance of depth judgments?
4. Normally the space of AR environments is relatively small, and the attenuation of sound with distance in this small area can be too vague to be perceived. This is because in most 3D sound systems, the intensity of sound (a very strong distance cue) would follow incremental reductions of 6 DB for each successive position of doubled distance (Begault, 1994). This means that for small areas, the 3D sound hardly plays a role to provide a cue to the depth (or the distance of the frontal sound sources). In order to make 3D sound give a cue to depth in a small space, we need to exaggerate the intensity difference of 3D sound according to distance (depth) changes of the virtual sound sources. However, this leads to a new issue, which is to research if this exaggeration will ruin the realistic and immersive feeling which we have been focused on. It needs to be investigated what are the subjective feelings on this exaggeration to the human.
5. Does 3D sound still improve the task performances in AR environment? If so, what kind of tasks can be used to evaluate a user's performance and what measures can be applied to investigate the 3D sound's effect on improving task performance?
6. Does 3D sound play a significant role in collaborative AR environment? If so, how can we apply 3D sound and evaluate its role? In what ways will the subjective experience 'human presence and collaboration' in AR environments? Especially what will be the subjective experiences from the addition of 3D sound?

Recent software and hardware advances in AR and auditory interfaces enable us to integrate 3D sound into AR environments and study these interesting questions. Although the quality of 3D sound generated by software synthesizers (Loki Entertainment Software)

is still to be examined by rigorous tests (Langendijk and Bronkhorst, 2000), the pre-tests taken by the developer and the user feedback from commercial applications have to some extent proved its fidelity. Our goal of this research is to do both quantitative and qualitative studies on the effectiveness of such software synthesized 3D sound in an AR environment. The outcomes of this research can have a useful impact on the development of AAR interfaces and the enhancement of AR environments for performing collaborative tasks such as co-operative teaching, training and gaming systems. Our contributions to the research topic are as follows:

1. *Depth perception in AR*: We investigated the impact of 3D sound on improving depth perception in AR systems with single-camera settings. We designed an experiment to measure the accuracy of depth judgment in the cases with and without 3D sound.
2. *Perceptual feeling of sound depth exaggeration*: In order to make full use of 3D sound's dimensional information in a relative small AR environment we exaggerated the intensity difference of virtual sound sources in different depths by multiplying an additional scalar factor. We investigated the subject's perceptual feeling to this exaggeration.
3. *Task analysis with AR sound*: We designed a searching task in another AR environment which requests the user to find a virtual character in the augmented scene; we investigated the impact of 3D sound on the task completion time.
4. *Collaboration and location with AR sound*: We applied a constant 3D sound on subject and task target to investigate the impact of 3D sound on the subject's feeling of 'human presence and collaboration' and the impact on 'locating correct augmented information'.

In Section 2, we discuss the general issues of developing AAR with 3D sound, and two different tracking methods for registering virtual 3D sound sources. The experimental goals and subjects are introduced in Section 3. The results of the experiments are then given and discussed in Section 4. The conclusions of the study are summarized in Section 5.

2. Development of AR environments with 3D sound for experimental analysis

2.1. General issues

Generating real 3D sound requires requires perceptual externalization of the sound source, which can only be brought about by using HRTFs (Bill G, 1994), reflections, reverberation, etc. (Wenzel, 1994) These HRTFs can be used to produce 3D sound effects from a linear convolution between sound signals and its corresponding spatial related impulse response (Wenzel et al., 1988) while the reflections and reverberations involve sophisticated modelling of environment. The individually derived HRTFs are better for individual users to provide more realistic sound experience. However, individual HRTFs are difficult for AR implementation due to the fact that AR systems are designed to be real time interactive systems that do not need individual user configuration. Thus our experiments were taken for randomized selected students. For easy implementation of 3D sound generation, several open source software development kits (SDKs), have been

developed such as OpenAL (Loki Entertainment Software) and FMOD (L. Firelight Technologies). These use the general HRTFs database and modeling environment in a relative simple manner. However, as mentioned in Section 1, for AR systems 3D sound does not play a significant role to tell the depth (or the distance of the frontal sound sources) because most of actual AR spaces are relatively of small size (for example small office, tabletops, books, etc.).

Sound intensity has been shown to be a key cue in distance perception in humans. However, in the small physical spaces used in AR systems the human is only effectively provided with binaural cues from the synthesizer. Thus we try to also add the effect of intensity for the depth cue. Our approach is to exaggerate the intensity difference of sound sources in different depths by applying an additional scaling factor to the intensity of 3D sound generated by synthesizer. The intensity of the i th 3D sound V'_i is given by Eq. (1):

$$V'_i = (D_{\max} - D_i)V_i/D_{\max} \quad (1)$$

where D_i is the depth of the i th 3D sound source; V_i is the intensity of the i th 3D sound generated by synthesizer given the position of the i th sound source. $D_{\max}$ is the possible maximum distance of the sound sources which is subject to the space of different AR environments. We measured the space in our first and second experiments and the maximum distance was 1.5 and 5.5 m, respectively.

Apart from intensity, it is known that for distance perception the ratio of the energies of direct and reflected sound is of importance (Middlebrooks and Green, 1991; Bronkhorst and Houtgast, 1999). For objects farther away from the listener, coupling the decrease in virtual sound intensity with an increase in the 'reverberation' will lead to a more realistic perceptions. In order to focus on the main points with regards to AR sound we did not add the factor of reverberation, and left this issue for our future research.

In our first experiment the sound sources are always placed around 1.5 m away in the front of the listener. However, in a more general and complex AR environment like the second experimental environment, the listener can walk freely in a physical space where virtual sound sources can be very close to the left and the right side of the head. In this case, the head starts functioning as a sound barrier for high frequencies. Consequently, the (high-frequency) sound intensity will of course increase as the source approaches the head in the ear at the same side of the head but, due to the increasing barrier function, decrease in the ear at the other side of the head. It is reported that binaural cues play an important role in auditory distance perception for nearby sources (Brungart and Rabinowitz, 1999; Brungart, 1999). This fact plus our exaggeration process mentioned above causes a design problem of AAR when the listener is very close to or even overlaid on the virtual sound source. In this case the user can have very strange auditory experience and even get confused. This was confirmed in our experimental results which are shown below (Question 3 of Experiment 2 below).

2.2. Development of AR environments with 3D sound for experimental analysis

In the most common AR paradigm, the user wears a head mounted display (HMD) through which the user views the real world, either directly, or via a video camera attached

to the front of the display Virtual objects are then superimposed on the real world. Early studies such as (Feiner et al., 1993) of this type simply overlaid two-dimensional text information on objects in the scene, but it has now become common to superimpose objects in three dimensions. The minimal requirements for this are that the position of the camera must be determined relative to the whole scene (or an object therein). The transformation matrix (TCM) between the scene and camera co-ordinates can then be used to generate the correct and seamless view of the virtual object. Given this TCM we can get the exact 3D position of the virtual object (virtual sound source) in the user's head co-ordinate system, which is the basic requirement of 3D sound synthesizer.

In our experiments, we applied the OpenAL (Loki Entertainment Software) to generate the 3D sound. Essential parameters needed are the virtual sound source's 3D position and its speed relative to the user's ear. More generally, the 3D position and speed of the virtual sound source and the position and orientation of user's head are needed. In the following parts we will introduce two tracking methods to solve this problem. However, since in our experiments the relative speed of head to virtual sound source is only as slow as 2 m s^{-1} , we ignored the Doppler Effect caused by their relative movement and thus we were only interested in their positions and orientations.

In our experiments, the final augmented virtual image was viewed through a Daeyang Cy-Visor DH-4400VP HMD, which presented the same 640×480 pixel image to both eyes. A PremaCam SCM series color security camera was attached to the front of this HMD. Our visual augmentation produced 25 images of 320×480 pixel resolution per second. To synchronize with the update of the visual scene, we updated the position of the virtual sound sources 25 times per second. The headphone on the HMD plays back the 3D sound generated by the computer. In this way, we provide an AR environment which is both visually and audibly augmented.

2.3. AR experimental environment implemented by vision-based tracking method

There have been many vision tracking methods for AR reported in recent years. In our first experiment, we used a precise vision-based toolkit for AR tracking (Kato and Billinghurst, 1999) reported by Kato and Billinghurst. It used image-processing technology to retrieve 3D position information from a fiducial marker. The 'ARGroove' (Poupyrev et al., 2000) applied this tracking method to get different position and orientation descriptions of the marker movements for which they defined different music. Our first AR experiment system used this tracking method to track the position of virtual sound source which is attached on fiducial marker.

The 3D position of the marker relative to camera can be obtained by computing the TCM from the camera co-ordinates to the 7 marker co-ordinates (Kato and Billinghurst, 1999). However, the 3D position of the marker we obtain is based on the camera co-ordinates. Thus, in order to obtain the 3D position of the marker in user's head co-ordinates (3D sound synthesizer's co-ordinates), simple translations from the camera to the center of user's inter-aural axis should be considered. As shown in Fig. 1, in order to attach the virtual sound source on the marker, the TCM from the 3D sound co-ordinates to marker co-ordinates could be calculated by simply applying translations to TCM obtained before. The 3D position of the marker in the 3D sound co-ordinates are then fed

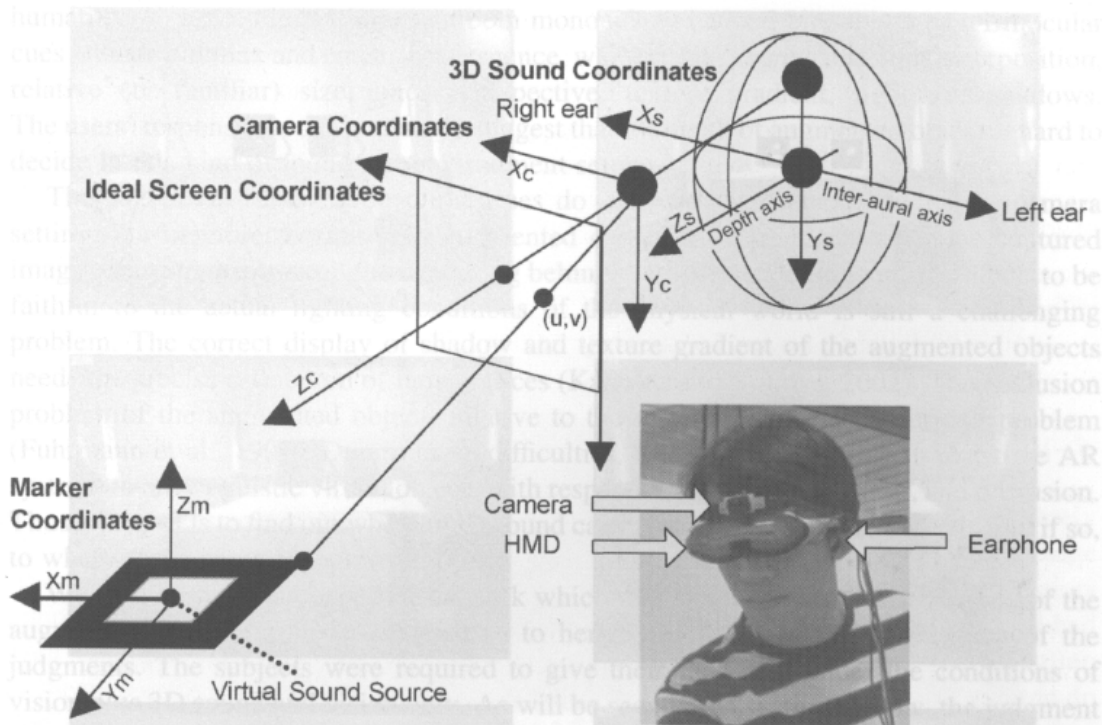


Fig. 1. In order to place a virtual object in the image of the three dimensional scene, the Euclidean transformation between the camera co-ordinates (X_c, Y_c, Z_c) and the marker co-ordinates (X_m, Y_m, Z_m) is estimated. This calculation is based on the imaged position of the corners of the square marker. The imaged position of one of these corners is depicted with pixel co-ordinates (u, v). To obtain the transformation matrix from the 3D sound co-ordinates to marker co-ordinates, translations should be taken from the camera co-ordinates to the 3D sound co-ordinates (X_s, Y_s, Z_s). The picture at the right bottom shows the physical setting of our single camera system where camera is mounted to the front of HMD and 3D sound plays back into the earphones.

into OpenAL (Loki Entertainment Software) for synthesis. Therefore, the 3D sound appears to emanate from the marker.

2.3.1. Depth confusion problem in single camera AR environment

In the most common AR paradigm, a single camera is used to capture the physical scenes (Billingshurst et al., 1998; Zhou et al., 2002; Kato and Billingshurst, 1999). This is not only because this setup is cheap but also because that it requires little computation cost and can be easily implemented. However, although this kind of AR environment setup enables the first-personal viewpoint, it cannot provide stereo video images for each eye, and this can lead to the difficulty of depth perception. Solving occlusion problems (Wloka and Anderson, 1995) or using stereo cameras can improve the depth perception problem. However, it requires more sophisticated settings (Stockburger, 1998) and more computational cost (Kanbara et al., 2000; Takagi et al., 2000). Thus, the low-cost single camera mono system is still widely used for AR applications.

Our objective is to find out whether 3D sounds could be helpful to improve depth perception in this commonly used lower-cost mono AR environment. Fig. 2 shows the depth confusion problem related to this kind of AR environment setup. We know that



Fig. 2. The depth confusion problem in a single-camera AR setting. The left column shows the image sequences of a scene captured by a moving camera while the right column shows the augmented view seen by the user. (1) In the top left frame, two markers of different size are located in different depth which is hard to tell because of lacking cues. In the following frames, we know that the left marker is nearer to the camera with the cues obtained from the motion, background and lighting environment. (2) Right column shows that the augmented objects occlude everything behind them hence weaken the effect of motion cue. Without background information (in this special case, the objects are located on the same board), relative depth is hard to tell.

human depth perception is based on both monocular cues and binocular cues. Binocular cues include parallax and ocular convergence, while monocular cues include interposition, relative (or familiar) size, linear perspective, texture gradient, light and shadows. The users' responses in our user study suggest that the depth of augmented object is hard to decide in this kind of mono AR environment setup.

This is because that the binocular cues do not work well due to the single-camera setting. Furthermore, because the augmented objects were rendered over the captured images, they appear to occlude everything behind them. To render the virtual objects to be faithful to the actual lighting conditions of the physical world is still a challenging problem. The correct display of shadow and texture gradient of the augmented objects needs the precise estimation of light sources (Kanbara and Yokoya, 2002). The occlusion problem of the augmented objects relative to the real object is also a difficult problem (Fuhrmann et al., 1999). Due to these difficulties, it is still not possible in real-time AR systems to have realistic virtual objects with respect to lighting, shadowing, and occlusion. Thus, our goal is to find out whether 3D sound can help in the judgment of depth, and if so, to what extent can it be helpful for AR.

We thus designed an experimental task which requires the subject to tell which of the augmented objects is closer (less deep) to her and we calculated the accuracy of the judgments. The subjects were required to give their judgment under the conditions of vision plus 3D sound and vision only. As will be seen in the sections below, the judgment accuracy was found to be significantly higher when 3D sound was applied.

2.4. AR experimental environment implemented by acoustic-inertial tracking method

The vision-based marker tracking method can register the virtual objects and virtual sound sources into the real scene precisely. However it has several short-comings as well. For example, the marker tracking algorithm is sensitive to the lighting environment. Also the requirement of keeping a marker in the scene all the time limits the user's movement as well as viewpoint and thus restricts the user to a relatively small space and a narrow angle of view. This drawback could be improved to some extent by using multi-marker tracking or natural feature tracking methods (Neumann and You, 1999). However, they still do not allow fully free head and body movements.

Some previous work used other methods for registering a virtual sound source in a larger space which allowed user's free movement. Makino et al. (1996) used the Global Positioning System (GPS) to locate the traveler within the environment. With differential correction by way of audio link from a GPS reference receiver in the local vicinity, localization is accurate to around 1 m under good conditions of reception. The listen project (Eckel et al., 2001) used motion-tracked wireless headphones to retrieve the position of the user in the environment. A similar method was applied by Schmandt (1998) where the head position is gained from a Polhemus sensor mounted on the headphones.

In our research system (Cheok et al., 2004; Wang et al., 2002), we use the InterSense IS-900 system (InterSense) for precise motion tracking. The IS-900 system is a hybrid acoustic-inertial six degree of freedom (6 DOF) position and orientation tracking system.

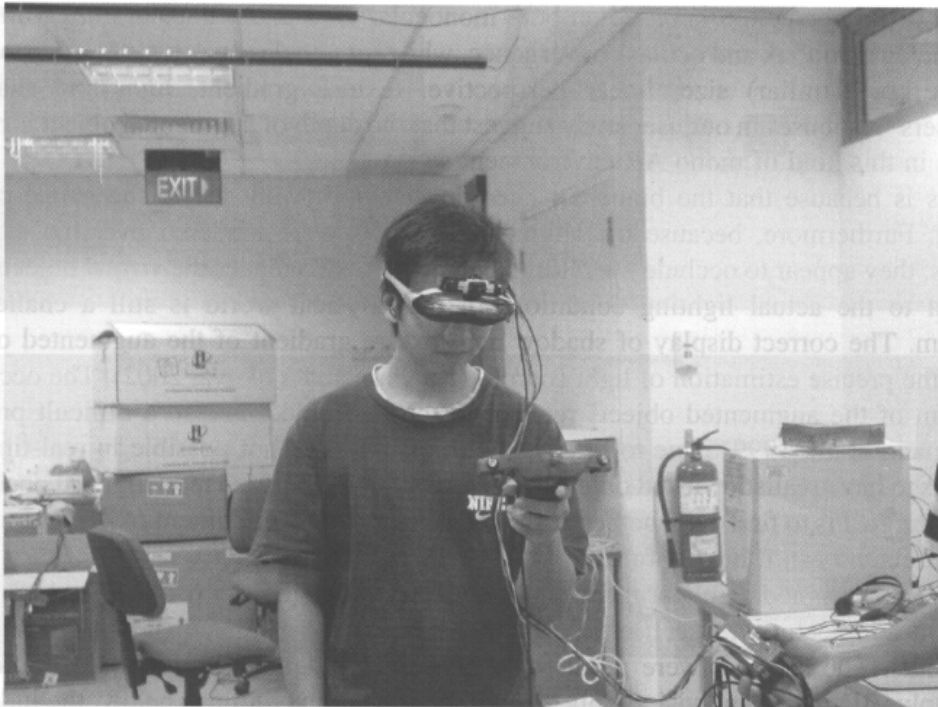


Fig. 3. The physical set-up of our acoustic-inertial tracking AR environment. On the ceiling there are six IS-900 SoniStrips which makes up a three meter by three meter area. A head tracker is mounted on the user's HMD and a camera is fixed on the head tracker. A wand tracker with four buttons and one joystick was held in the user's hand as an interaction device.

It tracks changes in orientation and position by integrating the outputs of its gyroscopes and accelerometers, and corrects drift by using a room-referenced ultrasonic time-of-flight range measuring system. It can obtain a resolution for position of 15 mm.

For the experimental system, as shown in Fig. 3, we mounted six IS-900 SoniStrips on the ceiling of a 3 meter by 3 meter space. This system can support up to four tracking stations. We used four tracking stations to track two users' heads and hands, respectively. A head tracker was mounted on the user's HMD and a camera is fixed on the head tracker. A wand tracker with four buttons and one joystick was held in the user's hand as an interaction device.

The system superimposes graphics on video sequences captured from the camera and displays the combined images on the HMD. We employed OpenAL (Loki Entertainment Software) for generating 3D sounds. Unlike the vision-based tracking method where we make the user's co-ordinates system as the reference, in this method, we used the IS-900 co-ordinates system as a reference while using the users' head position, orientation, and the virtual sound sources' 3D position as input parameters for the OpenAL software.

3. Experimental goals and subjects

Two experiments were taken in the two pre-mentioned AR environments, respectively. In the first experiment, our goal is to find out:

1. Whether 3D sound helps depth perception and by how much.
2. Whether the exaggeration of intensity difference of 3D sound will be acceptable or unacceptable psychologically.

In the second experiment, our goal is to find out:

1. Whether 3D sound helps in task performance, or more specifically, whether it helps to shorten a searching task completion time and by how much.
2. Whether 3D sound gives more immersive and realistic perception to the users and whether it helps the subject to distinguish different objects in AR environments.
3. Whether 3D sound increases the feeling of 'human presence and collaboration'.

Both qualitative and quantitative studies were conducted in each experiment. The study took place over a four-week period in the summer of 2002.

Forty subjects (13 females and 27 males) were each paid Singapore \$8 (approximately \$4 USD) per hour to participate in this study. All the participants were undergraduate students at the National University of Singapore. Most of them were freshmen or juniors majoring in computer engineering. The subjects were on average 21.3 years old and had used computer for 8.7 years. They were asked to mark from 1 to 7 about how often (1 means very often while 7 means very seldom) do they use computers and how often do they play games. The averages were 1.7 and 4.5 respectively, which means that they often use computers, but play games only occasionally. All of the subjects reported clear-vision and normal hearing abilities.

Each subject performed both experiments. However in the second experiment, 20 subjects (seven females and thirteen males) were asked to conduct the searching task with the aid of 3D sound while the other 20 subjects (6 females and 14 males) conducted the same task without the 3D sound. Before doing the experiments, all the subjects were given a brief introduction about AR and the tasks to be performed. Each of the subjects was given five minutes to initially try on the HMD and experience the 3D sound effect. After the experiments, all subjects were given 25 min to finish a questionnaire based on the experiments finished.

4. Experimental results

In this section we present the details of the evaluation studies of 3D sound effect and performance in our two AR environments described before

4.1. Experiment of the impact of 3D sound on depth judgment

4.1.1. Design and procedures

In this experiment, we examined the effect of 3D sound on helping users to judge the relative depth of objects in an AR environment (Fig. 4) implemented by vision-based tracking method. Users were required to tell the relative depth of the two markers upon which virtual objects were augmented. In order to precisely position the markers, we used a white board to hold the markers. We set the height of user's chair so that the markers

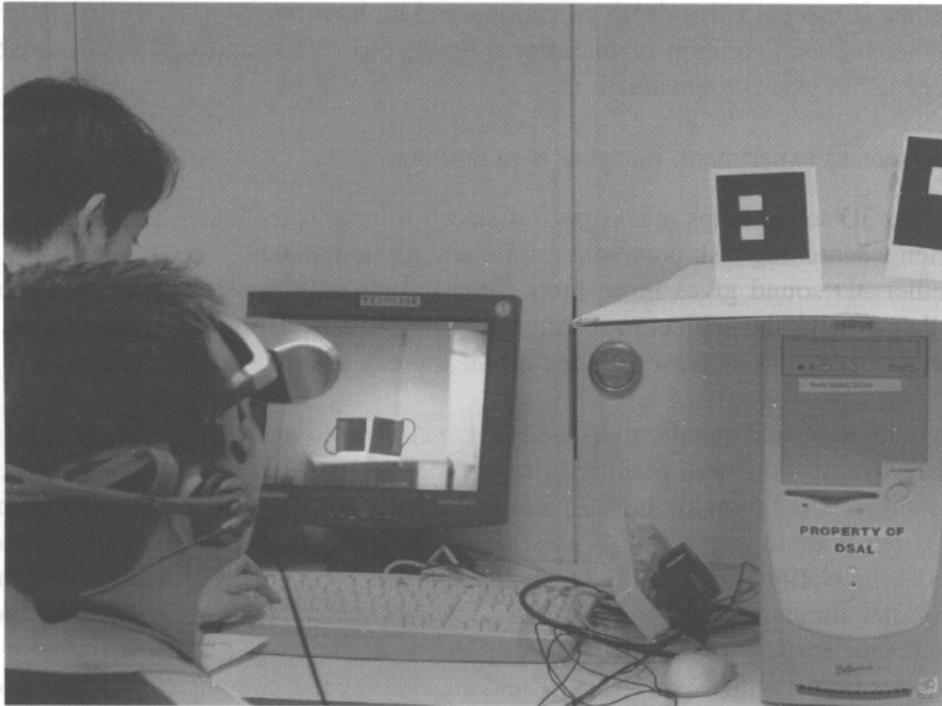


Fig. 4. The physical set-up of the experiment on depth judgment. The output of the computer VGA signal is sent to a monitor and HMD for display by a video converter. The user can only see from HMD while the monitor is for the use of the experimentalist. Two virtual telephones with different colors are augmented onto different markers respectively. The size of augmented objects is adjusted to about the same by adjusting the position of marker. Users are required to tell the relative depth of the two objects in the cases of with and without 3D sound aided.

and the eyes were at the same height. By this way we eliminated the vertical vision cue to depth perception—as the relative position on the same plane can tell the relative depth. This makes sense in AR environment since the augmented objects are not necessarily located on the same plane, and thus this cue is not commonly available. The relative position of the two markers was chosen carefully so that the two markers seem to be approximately of the same size in the camera's view. As described in Section 2.3.1, this will cause depth confusion and hence we can carefully decide the effectiveness of adding 3D sound to the virtual objects.

A preliminary study (Mereu, 1995) indicated that visually impaired users can use the sound environments to perceive depth and position in a 3D application. We hence propose that 3D sound could also be helpful in AR environment for people to perceive depth. To test this hypothesis, we implemented 3D sound in our AR environment and measured the accuracy of relative depth judgment of subject.

4.1.2. User interfaces

As shown in Fig. 4, we augmented the same shape virtual telephone with a different color on each of the markers. The virtual telephones were augmented with a 3D telephone sound that was produced to emanate from each virtual telephone. As explained in

Section 2, the intensity difference of 3D sound due to different depth of markers was exaggerated by a scaling factor. Subjects were asked to put on the headphone of HMD and perceive the difference of 3D sound when the marker was changed to different positions.

Every subject was required to perform 10 trials judging the relative depth of two telephones. Before every trial, the signal of the HMD is turned off so that the subject could not see how the markers were arranged. During that time, the user only sees black because the HMD is a nonoptical see through type. We placed the two different sized markers on the condition that the image size of the two objects are of about the same size, this can be observed by a monitor which is connected to the same VGA output as what the HMD is connected. Then the HMD is turned on and the subject was required to tell which telephone was nearer to him in the cases with and without 3D sound aided respectively. The possible answers are 'left', 'right' and 'uncertain'. We recorded the subjects' judgments and compared them with the correct answers for numerical analysis. We also asked some questions in the questionnaire for psychological analysis purpose.

4.1.3. Results

4.1.3.1. Performance. The chart in Fig. 5 provides a visual summary of the results of the depth judgment experiment. Fig. 5 compares the number of correct relative depth judgments in 10 trials for 40 subjects in the cases with 3D sound and without 3D sound aided respectively. It can be seen that judgments with 3D sound aided lead to 2.5 times as accurate (70.25 versus 28.25%) as those without 3D sound added.

Our expectation of this experiment was to evaluate the impact of 3D sound on depth judging accuracy. Using a 0.05 significant level, a one-way ANalysis Of VArance (ANOVA) (Stockburger D, 1998) of the individual correct judgment times of each user was used. In this experiment, we obtained $F(1,39)=129.55$; $p<0.001$ which declares the result to be statistically significant. Thus we conclude that 3D sound does significantly help to increase the number of times of correct depth judgments.

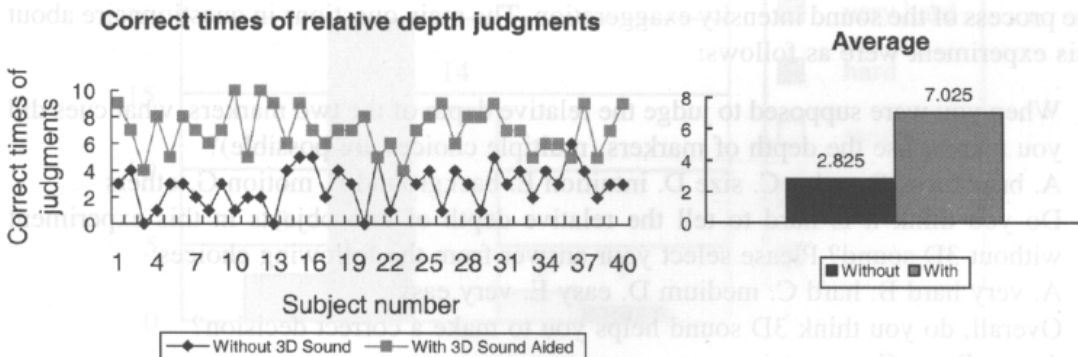


Fig. 5. Comparison of the correct depth judgment times of 40 subjects in ten trials in the cases of with and without 3D sound aided. From this chart we can see obviously that the accurate judgment times increase drastically by introducing 3D sound. The average of correct judgment times is increased from 2.825 to 7.025 by introducing 3D sound.

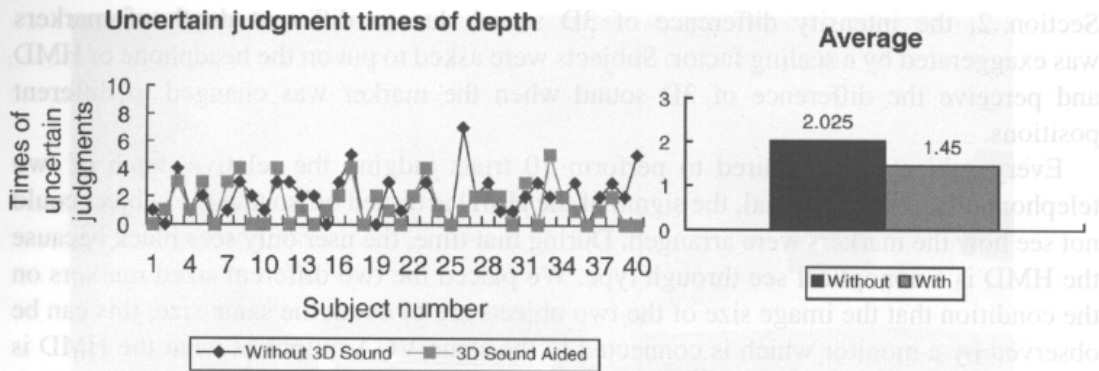


Fig. 6. Comparison of the uncertain judgments in the cases of with and without 3D sound aided. The average of uncertain judgment times is decreased from 2.025 to 1.45 by introducing 3D sound.

On the other hand, the addition of 3D sound decreases the uncertainty of relative depth judgment. Fig. 6 shows the comparison of uncertain judgment times between the cases of with and without 3D sound aided. The addition of 3D sound decreases the average uncertainty from $M=2.03$ to 1.45 times. A significant difference is found ($F(1,39)=4.24$; $p<0.05$). These results proved that the depth perception was significantly enhanced by 3D sound.

There was no significant difference found between the genders. For the correct judging times without 3D sound, males have a mean value of 2.67, females have a mean value of 3.15, $F(1,38)=0.9$; $p>0.1$. For the correct judging times with 3D sound aided, males have a mean value of 7.00, females have a mean value of 7:08, $F(1,38)=0.02$, $p>0.1$.

4.1.3.2. Questionnaire responses.. The purpose of the questionnaire is to examine how the subject qualitatively judges the relative depth of augmented objects and how difficult the task is. Apart from the quantitative results we obtain from the above experiments, it is advantageous to know the subjective feeling of users due to the addition of 3D sound, and the process of the sound intensity exaggeration. The main questions in questionnaire about this experiment were as follows:

1. When you were supposed to judge the relative depth of the two markers, what cues did you mainly use the depth of markers (multiple choices are possible)?
A. brightness B. color C. size D. intuition E. background F. motion G. others
2. Do you think it is hard to tell the relative depth of two objects in this experiment without 3D sound? Please select your answer from the following choices:
A. very hard B. hard C. medium D. easy E. very easy
3. Overall, do you think 3D sound helps you to make a correct decision?
A. yes B. no C. uncertain
4. In real life situations, the intensity of sound doesn't change drastically when the sound source is moving within a short distance, say 100 mm. However, in our experiment we exaggerated this effect. Thus you perceived an obvious difference between the two markers when they were placed in a relative small different depth.

Do you feel it is unintuitive that the depth scale of 3D sound in this experiment has been exaggerated? Please select from the following choices about how you feel:

A. very unintuitive B. unintuitive C. medium D. intuitive E. very intuitive F. did not notice at all

Question 1 allows multiple choices. Every choice given by the user will be counted as a single vote to the selected choice. Although different users might tick different numbers of choices, the vote diagram is not severely disturb qualitatively since our purpose is to find out what are the cues most users will use for judging depth. As shown in Fig. 7(a), the ‘size’ cue was given the first place (30 votes) of all the cues in our question. This partially explains why

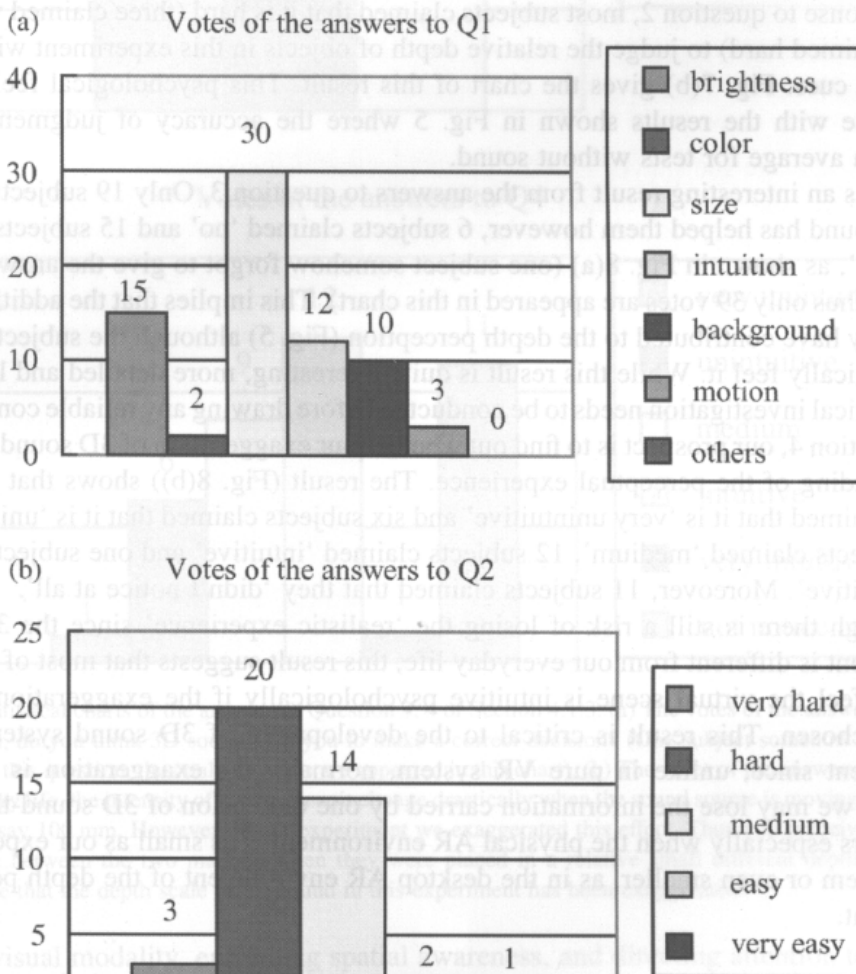


Fig. 7. Statistical charts of the answers to Question 1, 2 of Section 4.1.3 (a) The votes of the answers to question 1: When you were supposed to judge the relative depth of the two markers, what cues did you mainly use the depth of markers (can have multiple choices)? It can be seen from this chart that users are more likely to judge the depth of object by the size, brightness and the background cues. (b) The votes of the answers to question 2: Do you think it is hard to tell the relative depth of 2 objects in this experiment? It can be seen from this chart that it is hard to tell the relative depth of the two markers in our experimental AR environment.

it is difficult for subjects to judge the relative depth when two markers are almost of the same size. Our setting of AR environment in this experiment restrained the effect of background (ten votes) and motion (three votes). The cue 'brightness' which reacts the cue 'light and texture gradient' obtains the second highest votes (15 votes). This gives us a hint that in order to obtain good depth perception, it is also important to adjust the appearance of virtual object so that it fits its surrounding physical lighting environment.

However, in this experimental system, the brightness of the object is predefined when the model was created. Hence it brings more difficulties for depth judgment, and it can not provide the cue 'light and texture gradient'. Therefore, this suggests that in the future research we can adjust the brightness of augmented objects according to its lighting environment so as to achieve better depth perception.

In response to question 2, most subjects claimed that it is hard (three claimed very hard and 20 claimed hard) to judge the relative depth of objects in this experiment without the 3D sound cues. Fig. 7(b) gives the chart of this result. This psychological feeling is in accordance with the results shown in Fig. 5 where the accuracy of judgment is only 28.25% in average for tests without sound.

There is an interesting result from the answers to question 3. Only 19 subjects thought that 3D sound has helped them however, 6 subjects claimed 'no' and 15 subjects claimed 'uncertain', as shown in Fig. 8(a) (one subject somehow forgot to give the answer to this question, thus only 39 votes are appeared in this chart). This implies that the addition of 3D sound may have contributed to the depth perception (Fig. 5) although the subject may not psychologically feel it. While this result is quite interesting, more detailed and long term psychological investigation needs to be conducted before drawing any reliable conclusions.

In question 4, our prospect is to find out whether our exaggeration of 3D sound will lead to a degrading of the perceptual experience. The result (Fig. 8(b)) shows that only one subject claimed that it is 'very unintuitive' and six subjects claimed that it is 'unintuitive'. Nine subjects claimed 'medium', 12 subjects claimed 'intuitive' and one subject claimed 'very intuitive'. Moreover, 11 subjects claimed that they 'didn't notice at all'.

Although there is still a risk of losing the 'realistic experience' since the 3D sound environment is different from our everyday life, this result suggests that most of the users will still feel the virtual scene is intuitive psychologically if the exaggeration scale is properly chosen. This result is critical to the development of 3D sound system in AR environment since, unlike in pure VR system, normally the exaggeration is required, otherwise we may lose the information carried by one dimension of 3D sound-the depth. This occurs especially when the physical AR environment is as small as our experimental game system or even smaller, as in the desktop AR environment of the depth perception experiment.

4.2. Experiment of 3D sound's impact on task completion time and the feeling of 'human presence and collaboration'

4.2.1. Design and procedures

In the second experiment, we examined the effect of 3D sound in a larger AR environment in the form of a simple game Barfield (Barfield et al., 1997) identified three primary benefits of auditory spatial information displays as: relieving processing demands

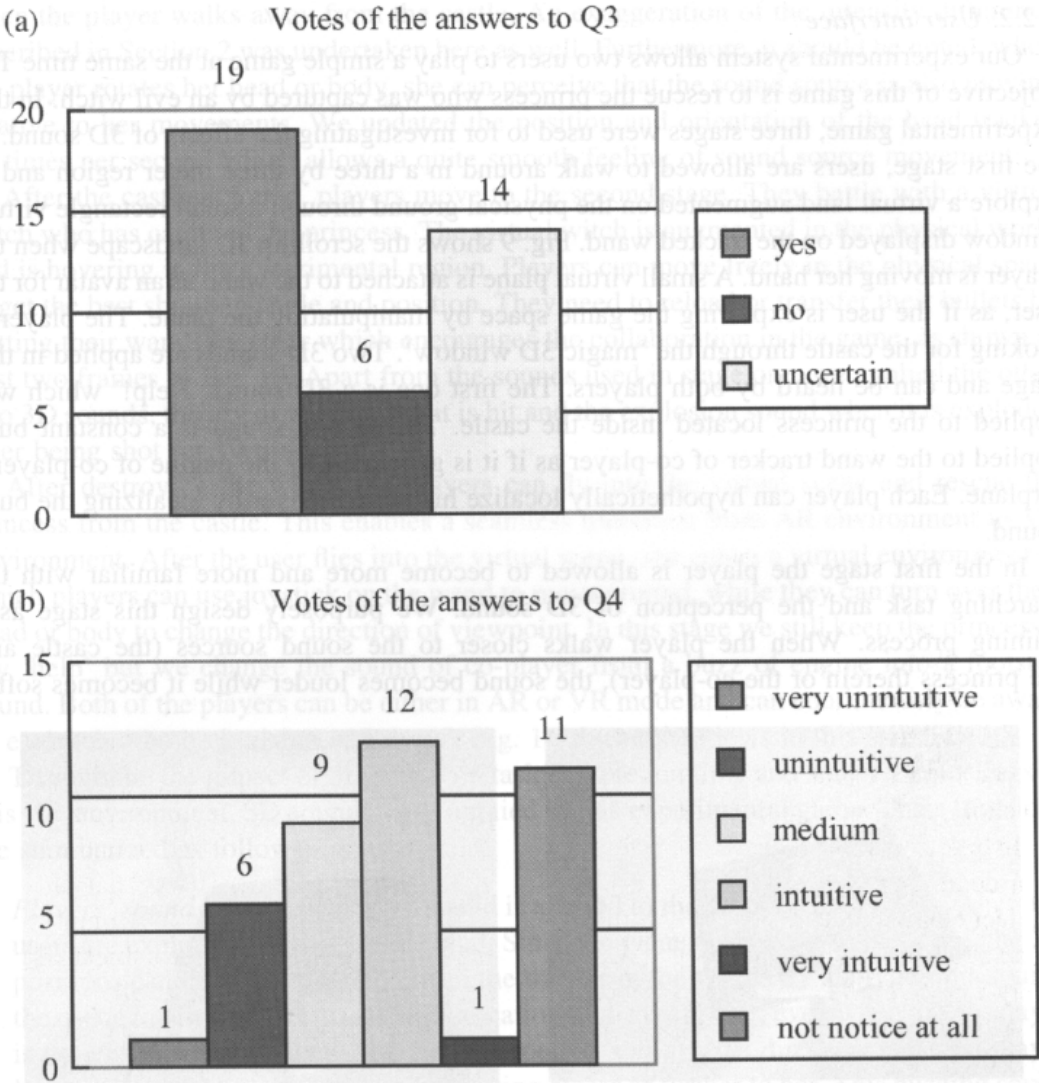


Fig. 8. Statistical charts of the answers to Question 3, 4 of Section 4.1.3. (a) The votes of the answers to question 3: Overall, do you think 3D sound help you to make a correct decision? (One subject somehow forgot to give answer to this question, thus only 39 votes are appeared in this chart). (b) The votes of the answers to question 4: In our every life, the intensity of sound doesn't change drastically when the sound source is moving within a short distance, say 100 mm. However, in our experiment we exaggerated this effect. Thus you perceived an obvious difference between the two markers when they were placed in a relative small different depth. Do you feel unintuitive that the depth scale of 3D sound in this experiment has been exaggerated?

on the visual modality, enhancing spatial awareness, and directing attention to important spatial events In our research system, we extend the benefits in this experiment by:

1. helping to localize an object in AR environment when the visual modality is weakened;
2. enhancing the feeling of human collaboration;
3. directing attention to different spatial objects or helping user to identify different spatial objects.

4.2.2. User interface

Our experimental system allows two users to play a simple game at the same time. The objective of this game is to rescue the princess who was captured by an evil witch. In this experimental game, three stages were used to investigate the effects of 3D sound. In the first stage, users are allowed to walk around in a three by three meter region and to explore a virtual land augmented on the physical ground through a small rectangle virtual window displayed on the tracked wand. Fig. 9 shows the scrolling 3D landscape when the player is moving her hand. A small virtual plane is attached to the wand as an avatar for the user, as if the user is exploring the game space by manipulating the plane. The player is looking for the castle through the 'magic 3D window'. Two 3D sounds are applied in this stage and can be heard by both players. The first one is a 3D sound 'Help!' which was applied to the princess located inside the castle. The second sound is a constant buzz applied to the wand tracker of co-player as if it is generated by the engine of co-player's airplane. Each player can hypothetically localize his/her co-player by localizing the buzz sound.

In the first stage the player is allowed to become more and more familiar with the searching task and the perception of 3D sound. We purposely design this stage as a training process. When the player walks closer to the sound sources (the castle and the princess therein or the co-player), the sound becomes louder while it becomes softer

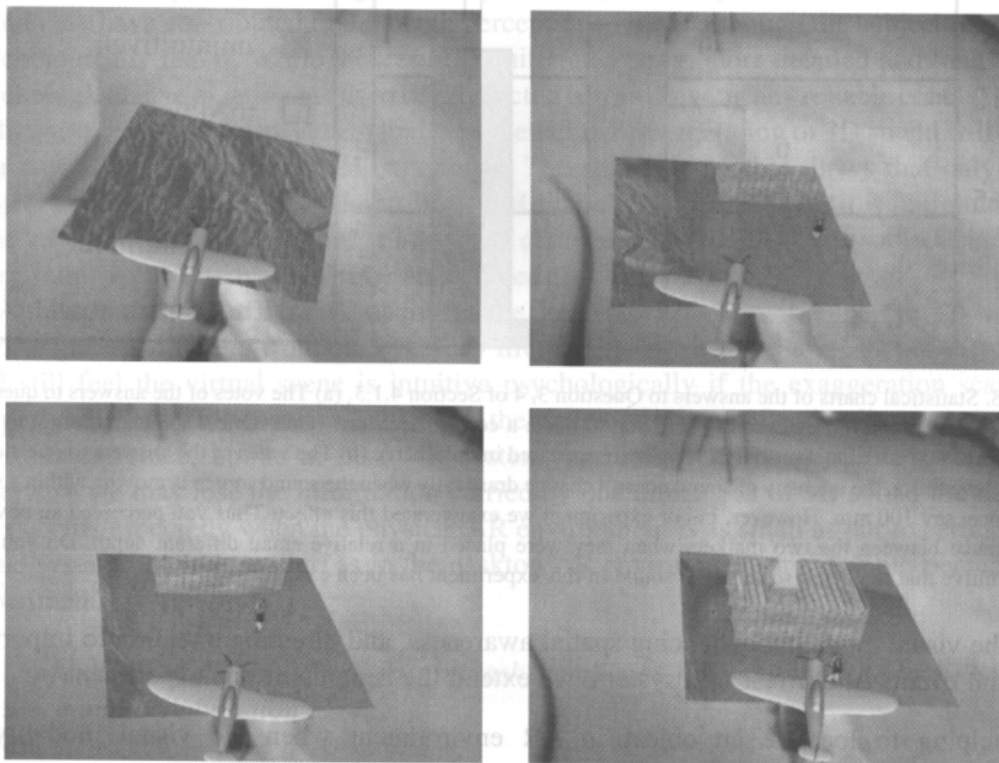


Fig. 9. Looking for the castle through a 'magic 3D window'. A virtual plane is augmented on the wand as an avatar for the user. A rectangle window is augmented in front of the wand through which the user can see the virtual land on the ground. When the user is moving around, the 3D landscape is also scrolled in the 'magic 3D window'. The user is looking down at the castle as if she is looking down from the sky in the airplane.

when the player walks away from the castle. An exaggeration of the intensity difference described in Section 2 was undertaken here as well. Furthermore, it should be noted, when the player rotates her head or body, she can perceive that the sound source is also moving relative to her movements. We updated the position and orientation of the head tracker 25 times per second which allows a quite smooth feeling of sound source movement.

After the castle is found, players move to the second stage. They battle with a virtual witch who has captured the princess. The virtual witch is augmented in the physical world and is hovering in the experimental region. Players can move freely in the physical space to get the best shooting angle and position. They need to reload or transfer their bullets by putting their wands together which encourages the collaboration in the game, as shown in first two frames of Fig. 10. Apart from the sounds used in stage one, we applied the other two 3D sounds, the cry of witch when it is hit and the explosion sound when it is exploded after being shot for 10 times.

After destroying the witch, the players can fly into the virtual scene and rescue the princess from the castle. This enables a seamless transition from AR environment to VR environment. After the user flies into the virtual scene, she enters a virtual environment in which players can use joystick on the wand to move around, while they can turn over their head or body to change the direction of viewpoint. In this stage we still keep the princess's cry 'help' but we change the sound of co-player from a buzz of engine into a footstep sound. Both of the players can be either in AR or VR mode and can continuously be aware of each other by both vision and sound. Fig. 11 shows the views in this stage.

To examine the impact of 3D sound on task completion time and subjective feelings in this AR environment, 3D sounds were applied in this experimental game. Their functions are summarized as follows:

1. *Players' sounds*: A constant buzz sound is applied to the co-player's airplane when the users are exploring the augmented land. Since the plane is attached to the wand, the 3D positions can be easily obtained from the tracker in the wand. By applying this sound, the user can always hear where is the location of the co-player, even when the co-player is not visually in the scene. She can still roughly tell to what direction is her co-player located and whether the co-player is getting closer or further to her. This buzzing sound is changed into a footstep sound when the co-player enters the VR environment. The different sound gives the hint of whether the co-player is in the AR or VR environment as well.
2. *Human voice*: A constant human voice 'Help! Help!' is applied to the princess which is the target of the searching task. This sound helps the player to turn and face to the correct direction and walk to the correct location where she can see the princess through the small window.
3. *Entertainment sounds*: To make the game more entertaining, we also applied other sound effects. A shooting sound is played when user press the shooting button on the wand. A scream sound and an explosion sound were played when the witch is destroyed. A landing sound of engine is played when the user transits from AR environment to VR environment. A female voice saying 'congratulations' and some greeting words was played when the user finished her mission-find the princess and rescue her.

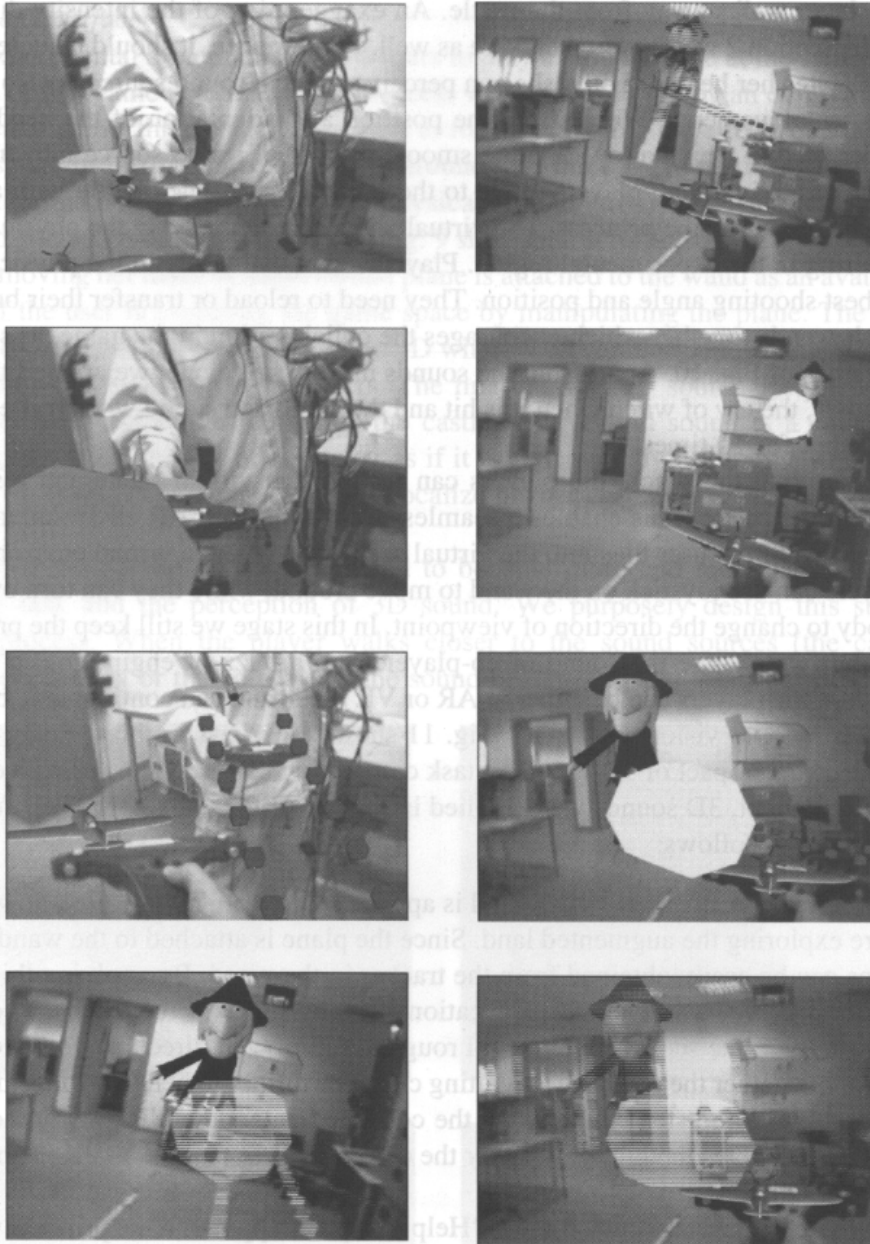


Fig. 10. Two users are collaboratively fighting the witch hovering around them in the physical experimental area. The user can see the augmented virtual witch in three dimensions through HMD. The two users need to reload or transfer their 'bullets' by putting their wands together as shown in the first two frames. When the user pressing a specific button on the wand, the airplane can fire bullets (blue and green dot lines in the subsequent frames). The position and orientation of the wand are used to decide trajectory of 'bullets' and whether the witch is shot or not. In the last frame, the witch disappeared after being shot for ten times.

In this experiment, we took both numerical and psychological studies of the subjects' responses. After the players finished the game missions, they probably have been familiar with the game, an additional task is required to perform in stage one. Instead of searching the castle, they need to search for the princess by walking around and scrolling

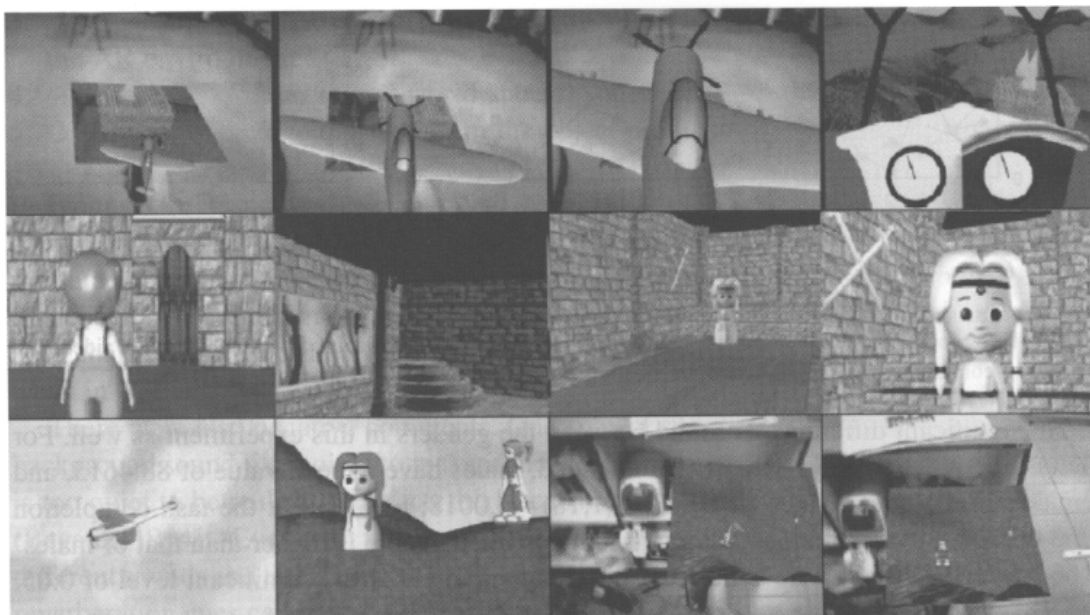


Fig. 11. Rescue the princess in the castle with co-player. (1) The first row shows the seamless transition from AR to VR that the user's airplane is 'flying into' and 'landing on' the VR world. (2) The second row shows one player's view when they are on the way to rescue the princess in the castle. The user uses the joystick to navigate however they can turn the body and head of the virtual character by physically turning their body and head. The footstep sound comes from the co-player and the 'Help!' scream of the princess can always be heard. (3) In the first frame of the third row, a user can physically look up in the sky to find her co-player who is still in AR mode (before flying into the VR mode). The user in the AR mode can still see the co-player and the princess by looking down to the land as if she is on the airplane. The second frame shows one player's view point when both of the players are in VR mode and come to the princess.

the window. The princess was taken outside the castle and was put at an open area on the land. Each subject was given a trial to see how the princess looks like in the small window. Then the princess was put at another position which is the same for all subjects. Every subject started from the same position and orientation in the space and began to search for the princess. The completion time of this searching task was recorded. Twenty subjects (7 females and 13 males) were asked to conduct the searching task with the aid of 'Help!' sound while the rest twenty subjects (6 females and 14 males) conducted the same task without any sound. Every subject performed this task only once either with or without sound aided. Apart from this numerical study, psychological studies were conducted by a linguistic questionnaire.

4.2.3. Results

4.2.3.1. Performance.. In this experiment the subjects performed a searching task as described in Section 4.2.2. The chart in Fig. 12 compares the completion time (in seconds) of the searching task for two groups in the cases with 3D sound and without 3D sound aided. The average task completion time of the group without 3D sound aided was 1.5 times as long (133.05 versus 88.1) as that with 3D sound aided. The effect of 3D sound on shorten the task completion time is significant, $F(1,38)=6.7$; $p<0.025$.

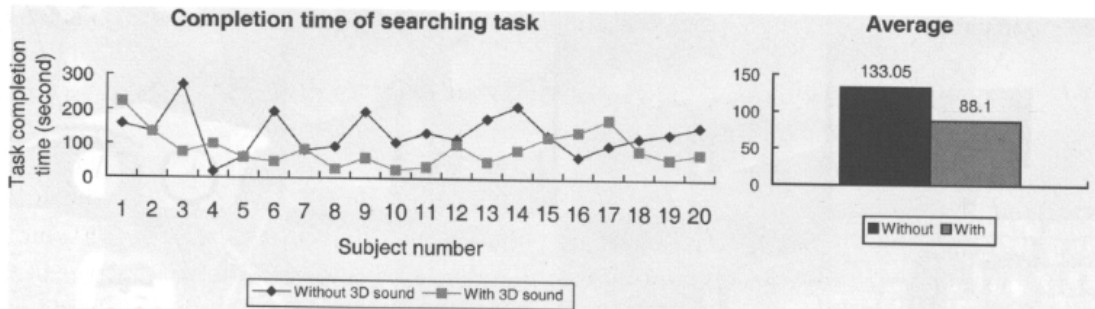


Fig. 12. The comparison of searching task completion time in the cases of with and without 3D sound aided. The average of completion time is shortened drastically from 133.05 to 88.1 s by introducing 3D sound.

No significant difference is found between the genders in this experiment as well. For the task completion time with 3D sound aided, males have a mean value of 88.4615, and females have a mean value of 87.43, $F(1,18)=0.0018$; $p>0.1$. For the task completion time without 3D sound aided, although females' mean value is higher than that of males' (166.33 versus 118.79), no significant difference is found at the significant level of 0.05, $F(1,18)=3.03$; $p>0.05$.

From the results given above we can see that, 3D sound helps significantly to shorten (about by half) the searching task completion time in this AR environment.

4.2.3.2. Questionnaire responses. The purpose of the questionnaire questions is to examine the impact of 3D sound on the subject's psychological feelings. We wanted to examine whether 3D sound improves the feeling of immersiveness and human presence and collaboration, whether it helps to identify spatial objects, and how much impact it has on these feeling. The main questions in questionnaire about this experiment were as follows:

1. Does 3D sound improve your perception of immersiveness in the AR environment? Do you think it is more realistic with 3D sound than without it? Why?
2. Does the 3D sound improve your feeling of human presence and collaboration as you can hear the sound coming from your collaborator at anytime?
3. Does the 3D sound help you to identify different information signals (spatial objects)?
4. Were you aware of your co-players in different places?
A. always B. very often C. often D. barely E. never
5. What has helped your feeling of 'human presence and collaboration'? (can be multiple choices, please order the factors by the order of decreasing importance)
A. small talk between co-players B. vision cues C. 3D Sound cues D. Others

According to question one, almost all subjects (39 of 40 subjects) claimed that 3D sound did improve the perception immersiveness. A total of 38 subjects claimed that it is more realistic with 3D sound, and one subject claimed 'a little better'. The main reasons they provided to support their viewpoint are as follows:

1. 'It is natural feeling and more realistic with 3D sound.'
2. 'You can feel the sound from all directions which gives a more 3D feeling.'

3. 'You can tell where the collaborator is positioned, or to know the surrounding objects in the AR environment.'
4. 'The feeling is closer to real world and 3D sound helps to navigate.'
5. 'I can hear and judge distance from the object producing the sound.'

From these responses, we can find that 3D sound does play an important role complementing the visual AR environment. Although this result seems to be natural since the same conclusion has been drawn in virtual reality environment (VRE), it proves that this conclusion is still tenable in AR environment when the implementation method has been changed and especially when the interfaces preserve our social interactions which are weak in VR.

There were also negative comments. One subject suggested that there should be more background sound like noises to make it more realistic. The subject said, 'The sound field is too quiet to be realistic.' In fact, this is consistent with the argument given by Begault (Begault, 1994): "Even with non-spatial cues, one can tell something about the distance of different sounds and their context,..., but the inclusion of 3-D sound techniques and spatial reverberation cues can greatly increase the immersiveness of a simulation, as well as the overall quality and the available nuance in representing different environmental contexts".

The important result we obtained from the responses to question two is that 3D sound improves the feeling of 'human presence and collaboration' when the subject is performing this experimental task. In this question, 39 of 40 subjects answered 'yes'. Some of the comments were:

1. 'At least I can find whoever it is.'
2. 'The sound constantly reminds us of the presence of the collaborator.'
3. 'Yes, like someone is actually in the world with you.'
4. 'It is really interesting that you can turn to face him when the clop-clop is getting closer to you in your back.'

One interesting comment was that 'I can know whether he is still in the airplane or has landed down and walking around' (which meant that the user could know if the other player was in AR or VR modes). This is actually one function of sound which is serving as an auditory icon (Gaver, 1986). A good negative comment suggested that 'it can be improved by adding speech communication, because a running motor does not sound very human, so it is like an object somewhat'.

Apart from applying 3D sound to the collaborator, we also applied 3D sound to the princess who is the target of the task. The responses to question three suggest that 3D sound, when applied to different spatial objects (information signals) in AR environment, can help the user to identify different information carriers. In our experiment 36 subjects claimed that they can constantly be aware of both the other collaborator and the princess simultaneously. This result suggests that by introducing more than one 3D virtual source sources in AR environment, it is possible for the users to identify different meanings of them and to distinguish them by the localization of the sound sources. As one subject described, 'yes, very much so. For instance, if the collaborator sounds from the left

earpiece and princess cries are heard at right earpiece, the directional news determines the positions of the collaborator and princess.'

However, one valuable criticism complained that 'the volume differs when you are far but when you are near I could not hear a difference especially in terms of direction', the other one complained that 'the sound sometimes seemed to be coming from all directions and I was uncertain whether to turn left/right, only when I was close did the volume increase, but in a jump, not gradually'. These comments point out the drawbacks of our exaggeration process of 3D sound intensity in this AR environment and also to some extent support the results of Brungart (Brungart and Rabinowitz, 1999; Brungart, 1999). We designed the auditory environment so that when the user becomes closer to the virtual sound source in the three by three meters region, the 3D sound intensity is exaggerated. This will be maximum intensity when the user is at the position of the virtual sound sources (distance to the object is zero). In this case, the binaural cues play a very important role for distance and direction perceptions. Because of the closeness to the object when near zero, even a slight movement of the user may cause a totally opposite feeling of the source direction (from left to right). When the movement is very fast, the intensity and sound direction may change rapidly. This problem can be partly solved by designing a better sound-scape. However the situation when the user is overlaid on the sound source is still a difficult problem unless we apply some physical constraints on the user's sound near to virtual sound sources.

Chart (a) and (b) in Fig. 13 shows the subjects' responses to question four and question five, respectively. We can see from chart (a) that nine of 40 subjects claimed that they were 'always' be aware of co-players while five subjects claimed 'very often' and 18 claimed 'often'. This leads to the improvement to the feeling of collaboration. A total of 39 subjects agreed that 3D sound did increase their feeling of collaboration from the result of question two.

To examine the importance of 3D sound among all cues, subjects were required to choose the cues they thought to have helped them and to order them by the importance. 3D sound cues obtained the highest votes (36 votes) among all the cues. More importantly, a total of 14 subjects regarded 3D sound cues as the most important cue while 'small talk' and 'vision cues' only obtained five and four votes respectively. This result suggests that 3D sound does play a very important role in improving the subject's feeling of collaboration. It could even dominate among all possible cues in AR environment, especially when other cues are restrained by hardware settings, for example, angle of view is restrained by HMD in common AR system. In this situation, the visual cues are restrained due to the narrow viewpoint of HMD, and hence their effects on collaboration are limited. On the contrary, the 3D sound can be generated from any points in the AR space. When 3D sound is applied to the user and given different meaning at different situations, it can play the most important role to help the user's feeling of 'human presence and collaboration'.

5. Conclusions

The purpose of this work is to investigate the effectiveness of 3D sound in AR environments. We designed two experimental AR environments to study the effectiveness

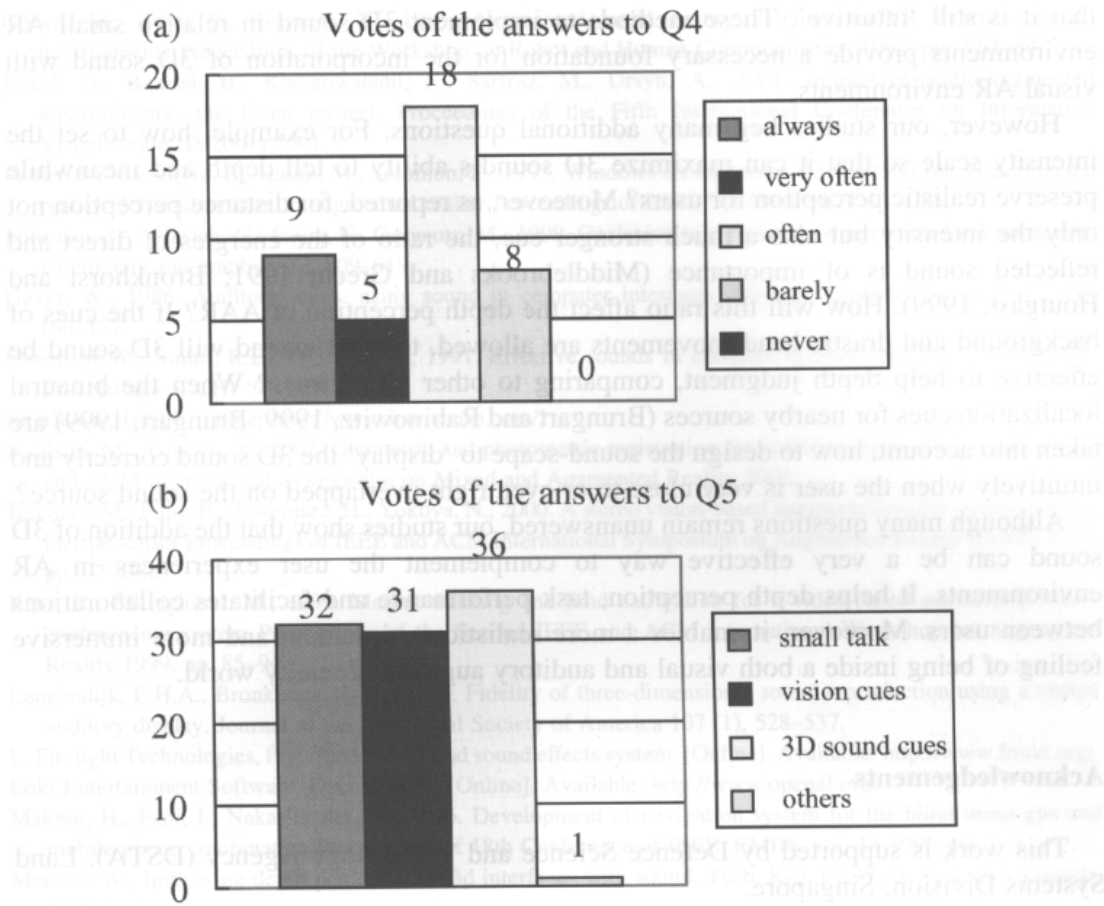


Fig. 13. Statistical charts of the answers to Question 4, 5 of Section 4.2.3. (a) The votes of the answers to question 4: Were you aware of your co-players in different places? We can see from the chart that in this AR environment, subjects can often be aware of co-player's position, however, this result is impossible if there was no 3D sound applied since the subject can only occasionally see co-player due to the narrow angle of view. (b) The votes of the answers to question 5: What has helped your feeling of 'human presence and collaboration'? It can be seen from this chart that 3D sound plays the most important role among all the cues. It gets even more votes than vision cues and voice communication cues.

both quantitatively and qualitatively. Two different tracking methods were applied to retrieve the 3D position of virtual sound sources. We examined the effects of 3D sound on improving depth perception and shortening task completion time. We also investigated 3D sound's effects on improving immersive and realistic perceptions, helping user to identify different spacial objects, and improving the subjective feeling of 'human presence and collaboration'.

The 3D sound generated by OpenAL (Loki Entertainment Software) applying HRTFs and simple modelling of environment is used in our experiments. Apart from its effects for the user on sound source localization, we tried to emphasize its effect on telling the depth (distance). Since intensity has been reported to be a key cue for distance perception, we exaggerated the intensity difference of sound sources in different depth by applying an additional scalar factor to the intensity of generated 3D sound. The user study result shows

that it is still 'intuitive'. These methods to implement 3D sound in relative small AR environments provide a necessary foundation for the incorporation of 3D sound with visual AR environments.

However, our studies beg many additional questions. For example, how to set the intensity scale so that it can maximize 3D sound's ability to tell depth and meanwhile preserve realistic perception for users? Moreover, as reported, for distance perception not only the intensity but also a much stronger cue, the ratio of the energies of direct and reflected sound is of importance (Middlebrooks and Green, 1991; Bronkhorst and Houtgast, 1999). How will this ratio affect the depth perception in AAR? If the cues of background and drastic head movements are allowed, to what extent will 3D sound be effective to help depth judgment, comparing to other visual cues? When the binaural localization cues for nearby sources (Brungart and Rabinowitz, 1999; Brungart, 1999) are taken into account, how to design the sound-scape to 'display' the 3D sound correctly and intuitively when the user is very close to or even right overlapped on the sound source?

Although many questions remain unanswered, our studies show that the addition of 3D sound can be a very effective way to complement the user experiences in AR environments. It helps depth perception, task performance and facilitates collaborations between users. Moreover, it enables a more realistic environment and more immersive feeling of being inside a both visual and auditory augmented reality world.

Acknowledgements

This work is supported by Defence Science and Technology Agency (DSTA), Land Systems Division, Singapore.

References

- Avionique S, Multipurpose auditory display for 3-d hearing applications. Online. <http://www.cordis.lu/esprit/src/22352.htm>.
- Azuma, R.T., 1997. A survey of augmented reality. *Presence: Teleoperators and Virtual Environments* 6 (4), 355–385.
- Barfield, W., Cohen, M., Rosenberg, C., 1997. Visual, auditory, and combined visual-auditory displays for enhanced situational awareness. *The International Journal of Aviation Psychology* 7 (2), 123–138.
- Begault, D., 1994. 3-D Sound for Virtual Reality and Multimedia. AP Professional, Boston.
- Bill G., Keith M. Hrtf measurements of a kemar dummy-head microphone, Tech. Rep. 280, MIT Media Laboratory Perceptual Computing Technical Report, May 1994.
- Billinghurst, M., Bowskill, J., Jessop, M., Morphet, J., 1998. A wearable spatial conferencing space Proceedings of ISWC 98 1998, pp. 76–83.
- Bronkhorst, A.W., Houtgast, T., 1999. Auditory distance perception in rooms. *Nature* 397, 517–520.
- Brungart, D.S., 1999. Auditory localization of nearby sources. iii. stimulus effects. *Journal of the Acoustical Society of America* 106 (6), 3589–3602.
- Brungart, D.S., Rabinowitz, W.M., 1999. Auditory localization of nearby sources. Head-related transfer functions. *Journal of the Acoustical Society of America* 106 (3), 1465–1479.
- Cheok, A.D., Yang, X., Zhou, Z., Billinghurst, M., Kato, H., 2004. Touch-space: Mixed reality game space based on ubiquitous, tangible, and social computing. *Personal and Ubiquitous Computing* 2002. Vol. 6 2004 pp. 430.

- Cohen, M., Aoki, S., Koizumi, N., 1993. Augmented audio reality: telepresence/VR hybrid acoustic environments Proceedings of the Workshop on Robot and Human Communication 1993, pp. 3.61–64.
- Eckel, G., Banissi, B., Khosrowshahi, F., Sarfraz, M., Ursyn, A., 2001. Immersive audio-augmented environments—the listen project. Proceedings of the Fifth International Conference on Information Visualization (IV2001) 2001.
- Feiner, S., MacIntyre, B., Haupt, M., Solomon, E., 1993. Windows on the world: 2d windows for 3d augmented reality: 2d windows for 3d augmented reality Proceedings of UIST '93 1993, pp. 1.45–1.55.
- Fuhrmann, A., Hesian, G., Faure, F., Gervautz, M., 1999. Occlusion in collaborative augmented environments. *Computers and graphics* 23, 809–819.
- Gaver, W., 1986. Auditory icons: using sound in computer interfaces. *Human Computer Interaction* 2 (1), 166–177.
- Gaver, W.W., Smith, R.B., O'Sheak, T., 1991. Effective sounds in complex systems: the arkola simulation. Proceedings of CHI '91 1991, 85–90.
- InterSense, Is-900. online. <http://www.intersense.com/>.
- Kanbara, M., Yokoya, N., 2002. Geometric and photometric registration for real-time augmented reality. IEEE and ACM International Symposium on Mixed and Augmented Reality 2002.
- Kanbara, M., Fujii, H., Takemura, H., Yokoya, N., 2000. A stereo vision-based augmented reality system with an inertial sensor Proceedings of IEEE and ACM International Symposium on Augmented Reality (ISAR) 2000, pp. 97–100.
- Kato, H., Billinghurst, M., 1999. Marker tracking and hmd calibration for a video-based augmented reality conferencing system Proceedings of the Second IEEE and ACM International Workshop on Augmented Reality 1999, pp. 85–94.
- Langendijk, E.H.A., Bronkhorst, A.W., 2000. Fidelity of three-dimensional sound reproduction using a virtual auditory display. *Journal of the Acoustical Society of America* 107 (1), 528–537.
- L. Firelight Technologies, Pty, fmod, music and sound effects system. [Online]. Available: <http://www.fmod.org/>.
- Loki Entertainment Software, Openal SDK. [Online]. Available: <http://www.openal.org>.
- Makino, H., Ishii, I., Nakashizuka, M., 1996. Development of navigation system for the blind using gps and mobile phone combination Proceedings of 18th Conference of IEEE, EMBS, vol. 18 1996, pp. 1–5.
- Mereu S.W., Improving depth perception in 3d interfaces with sound, Tech. Rep. CS95-35, Waterloo, Canada, 1995.
- Middlebrooks, J.C., Green, D.M., 1991. Sound localization by human listeners. *Annual Review of Psychology* 42, 135–159.
- Milgram, P., Takemura, H., Utsumi, A., Kishino, F., 1994. Augmented reality: a class of displays on the reality-virtuality continuum. *Telemanipulator and Telepresence* 2351.
- Mynatt, E.D., Back, M., Want, R., Frederick, R., 1997. Audio aura: light-weight audio augmented reality Proceedings of the UIST '97 User Interface Software and Technology Symposium 1997, pp. 21.1–2.
- Neumann, U., You, S., 1999. Natural feature tracking for augmented reality. *IEEE Transactions on Multimedia* 1 (1), 53–64.
- Poupyrev, I., Airola, C., Billinghurst, M., Kato, H., 2000. Augmented groove: collaborative jamming in augmented reality. *ACM SIGGRAPH Abstracts and Applications* 2000, 2000, 77.
- Schmandt, C., 1998. Audio hallway: a virtual acoustic environment for browsing Proceedings of UIST '98 1998, pp. 1.63–70.
- Stockburger D.W. Introductory statistics: Concepts, models and applications. online, 1998. <http://www.psychstat.smsu.edu/introbook/sbk00.htm>.
- Sutherland, I.E., 1968. A head-mounted three dimensional display. Proceedings of the AFIPS Fall Joint Computer Conference 33, 7.57–7.64.
- Takagi, A., Yamazaki, S., Saito, Y., Taniguchi, N., 2000. Development of a stereo video see-through hmd for ar systems Proceedings of IEEE and ACM International Symposium on Augmented Reality (ISAR) 2000, pp. 68–77.
- Wang, W., Yang, X., Cheok, A.D., 2002. Touch space: an embodied computing mixed reality game space. *International Workshop on Entertainment Computing (IWEC 2002)* 2002, 4.55–4.62.
- Wenzel, E.M., 1994. Spatial sound and sonification, in: Kramer, G (Ed.), *Auditory display: sonification, audification, and auditory interfaces*, pp. 127–150.

- Wenzel, E.M., 1996. Research in virtual acoustic displays at nasa Proceedings of the Simulation Technology and Training Conference (SimTecT'96) 1996, pp. 85–90.
- Wenzel, E.M., Wightman, F.L., Foster, S.H., virtual, A., 1988. A virtual display system for conveying three-dimensional acoustic information Proceedings of the Human Factors Society, 32 1988, pp. 86–90.
- Wloka, M.M., Anderson, B.G., 1995. Resolving occlusion in augmented reality Proceedings of the 1995 symposium on Interactive 3D graphics 1995, pp. 5–12.
- Zhou, Z., Fabiz, F., Chen, X., Cheok, A.D., 2002. Magic music desk: a multi-modal embodied interactive desk International Workshop on Entertainment Computing (IWEC2002) 2002, pp. 4.23–30.

APPENDIX

1011E



Keyword



0953-5438

[Advanced](#)

- ① **Search Tip:** Enter one or more keywords. Use quotes to search for a phrase (e.g. solar power; polar bears; "systems of oppression"). See tips about [Basic Keyword Searching](#).



Everything

[Catalog](#)

Articles

Databases

Online Journals

Guides and More

[Catalog](#) / Record

Serial Journal

Interacting with computers.

**Record info:****Format**

Serial



Journal

Contributors[ScienceDirect \(Online service\)](#)[Oxford Journals \(Firm\)](#)[British Computer Society. Human Computer Interaction Specialist Group.](#)**Published/Created**

Guildford, Surrey : Butterworths, 1989-

Language

English

Numbering

Vol. 1, no. 1 (Apr. 1989)-

Current Publication Frequency

Bimonthly, <1999->

Former Publication Frequency

Three times a year, 1989-

Note

Title from cover.

Issued in print and online.

Issued by: British Computer Society, Human Computer Interaction Specia



Ask a Librarian



Physical Description

v. ; 25 cm.

Media Format

Electronic mode of access: World Wide Web.

ISSN

0953-5438

OCLC Number

20745502

Subjects (LCSH)

[Human-computer interaction -- Periodicals.](#)

Academic Discipline

[Engineering](#) > [Computer Science](#)

[Engineering](#) > [Robotics](#)

[Social Sciences](#) > [Information Science](#) > [Human Computer Interaction](#)

The University of Michigan Library aims to describe library materials in a way that respects the people and communities who create, use, and are represented in our collections. Report harmful or offensive language in catalog records, finding aids, or elsewhere in our collections anonymously through our [metadata feedback form](#). More information at [Remediation of Harmful Language](#).

Available at:

 **Online Resources** · 2 items

 **HathiTrust Digital Library** · 2 items

 **Offsite Shelving** · 17 items

About location

- 2-20:1 : 1990-2008

Action	Description	Status	Call Number
Get This	v.2-3 1990-1991	✓ On shelf	QA 76.9 .H85 I591
Get This	v.4-5 1992-1993	✓ On shelf	QA 76.9 .H85 I591
Get This	v.6 1994	✓ On shelf	QA 76.9 .H85 I591
Get This	v.7 1995	✓ On shelf	QA 76.9 .H85 I591
Get This	v.8 1996	✓ On shelf	QA 76.9 .H85 I591
Get This	v.9 1997/1998	✓ On shelf	QA 76.9 .H85 I591
Get This	v.10 1998	✓ On shelf	QA 76.9 .H85 I591
Get This	v.11 1998/1999	✓ On shelf	QA 76.9 .H85 I591



Ask a Librarian



Action	Description	Status	Call Number
Get This	v.12 1999/2000	✓ On shelf	QA 76.9 .H85 I591
Get This	v.13 2000/2001	✓ On shelf	QA 76.9 .H85 I591
Show fewer			
Get This	v.14 2001/2002	✓ On shelf	QA 76.9 .H85 I591
Get This	v.15 2003	✓ On shelf	QA 76.9 .H85 I591
Get This	v.16 2004	✓ On shelf	QA 76.9 .H85 I591
Get This	v.17 2005	✓ On shelf	QA 76.9 .H85 I591
Get This	v.18 2006	✓ On shelf	QA 76.9 .H85 I591
Get This	v.19 2007	✓ On shelf	QA 76.9 .H85 I591
Get This	v.20 no.1 2008	✓ On shelf	QA 76.9 .H85 I591
Show fewer			

Actions Select what to do with this record.

Email



Text



Citation

Export Citation
(EndNote)Export Citation
(RIS)

Copy link

Link copied!

MARC Data

LDR	00000nas a22003971a 4500
001	990024764370106381
005	20210305194406.0
006	m d
007	cr bn ---aaaaa
008	911021c19899999enkbr p 0 a0eng
035	a (MiU)002476437MIU01
010	a 89658522
022	a 0953-5438 0 http://worldcat.org/issn/0953



Ask a Librarian



022		y 1873-7951
030		a INTCEE
035		a (WaSeSS)ejrnlssj0007784
035		a (RLIN)MIUG91-S2868
035		a (0CoLC)20745502 0 http://www.worldcat.org/oclc/20745502
035		a (0CoLC)ocm20745502 0 http://www.worldcat.org/oclc/20745502
035		a (SFX)954925575987
040		a DLC c DLC d WaU d DLC d NSDP d NST d OUCA d CStRLIN d MiU
042		a lc a nsdp
050	0 0	a QA76.9.H85 b I59
210	0	a Interact. comput.
222	0	a Interacting with computers
245	0 0	a Interacting with computers.
260		a Guildford, Surrey : b Butterworths, c c1989-
300		a v. ; c 25 cm.
310		a Bimonthly, b <1999->
321		a Three times a year, b 1989-
362	0	a Vol. 1, no. 1 (Apr. 1989)-
500		a Title from cover.
530		a Issued in print and online.
538		a Electronic mode of access: World Wide Web.
550		a Issued by: British Computer Society, Human Computer Interaction Specialist Group.
650	0	a Human-computer interaction v Periodicals. 0 http://id.loc.gov/authorities/subjects/sh2008122005
710	2	a ScienceDirect (Online service) 9 WaSeSS 0 http://id.loc.gov/authorities/names/no00037061 0 http://viaf.org/viaf/sourceID/LC no00037061



Ask a Librarian



710 2	a Oxford Journals (Firm) 9 WaSeSS 0 http://id.loc.gov/authorities/names/nb2007012278 0 http://viaf.org/viaf/sourceID/LC nb2007012278
710 2	a British Computer Society. b Human Computer Interaction Specialist Group. 0 http://id.loc.gov/authorities/names/n85180782 0 http://viaf.org/viaf/sourceID/LC n85180782
856 4 0	3 03/01/1996 - z Access to the Oxford Journals (Firm) online version restricted; authentication may be required: u https://academic.oup.com/iwc 9 WaSeSS
856 4 0	3 04/01/1989 - 11/01/2012 z Access to the ScienceDirect (Online service) online version restricted; authentication may be required: u https://www.sciencedirect.com/science/journal/09535438 9 WaSeSS
997	a MARS
998	c sersolserial-dld ERLoad20160225merge
998	c SC9 s 9110
958	a MiU
958	a MiFliC
959	a (notis)ULAMY6932
995	a 20
BIB	u 2021-08-17 12:10:40 US/Eastern c 2021-06-21 07:47:31 US/Eastern s false
E56	l ELEC t static u https://na04.alma.exlibrisgroup.com/view/uresolver/01UMICH_INST /openurl?u.ignore_date_coverage=true&portfolio_pid=531007563000006381& Force_direct=true a 2021-06-23 20:02:46 v https://umich.alma.exlibrisgroup.com/view/uresolver/01UMICH_INST /openurl?&rfr_id=info:sid/primo.exlibrisgroup.com& svc_dat=CT0?u.ignore_date_coverage=true?u.ignore_date_coverage=true& rft.mms_id=990024764370106381 z Access to the ScienceDirect (Online service) online version restricted; authentication may be required: q true s Available 8 531007563000006381
E56	l ELEC t static u https://na04.alma.exlibrisgroup.com/view/uresolver/01UMICH_INST /openurl?u.ignore_date_coverage=true&portfolio_pid=531007563020006381& Force_direct=true a 2021-06-23 20:02:46



Ask a Librarian



			v https://umich.alma.exlibrisgroup.com/view/uresolver/01UMICH_INST/openurl?&rfr_id=info:sid/primo.exlibrisgroup.com&svc_dat=CT0?u.ignore_date_coverage=true&u.ignore_date_coverage=true&rft.mms_id=990024764370106381 z Access to the Oxford Journals (Firm) online version restricted; authentication may be required: q true s Available 8 531007563020006381
852	0		b OFFS a MiU c STATE h QA 76.9 .H85 I591 8 22796218950006381
866	3	2	a 2-20:1 8 22796218950006381
866	3	2	a 1990-2008 8 22796218950006381
974			8 22796218950006381 f 1 c STATE m ISSUE a 39015040316922 e STATE 7 23796218890006381 z v.9 1997/1998 p 01 r 1998-07-24 06:59:00 US/Eastern h QA 76.9 .H85 I591 d OFFS b OFFS
974			8 22796218950006381 f 1 c STATE m ISSBD a 39015049156295 e STATE 7 23796218780006381 z v.19 2007 p 01 r 2007-02-09 05:59:00 US/Eastern h QA 76.9 .H85 I591 d OFFS b OFFS
974			8 22796218950006381 f 1 c STATE m ISSUE a 39015049155958 e STATE 7 23796218790006381 z v.20 no.1 2008 p 01 r 2008-02-05 05:59:00 US/Eastern h QA 76.9 .H85 I591 d OFFS b OFFS
974			8 22796218950006381 f 1 c STATE m ISSUE a 39015036236266 e STATE 7 23796218920006381 z v.6 1994 p 01 r 1996-12-24 05:59:00 US/Eastern h QA 76.9 .H85 I591 d OFFS b OFFS
974			8 22796218950006381 f 1 c STATE m ISSUE a 39015058319420 e STATE 7 23796218830006381 z v.15 2003 p 01 r 2004-08-03 06:59:00 US/Eastern h QA 76.9 .H85 I591 d OFFS b OFFS
974			8 22796218950006381 f 1 c STATE m ISSUE a 39015047940203 e STATE 7 23796218840006381 z v.14 2001/2002 p 01 r 2003-09-19 06:59:00 US/Eastern h QA 76.9 .H85 I591 d OFFS b OFFS
974			8 22796218950006381 f 1 c STATE m ISSBD a 39015065056999 e STATE 7 23796218810006381 z v.17 2005 p 01 r 2005-01-19 05:59:00 US/Eastern h QA 76.9 .H85 I591 d OFFS b OFFS
974			8 22796218950006381 f 1 c STATE m ISSUE a 39015048289519 e STATE u mdp.39015048289519 ic 20170831 7 23796218850006381 z v.13 2000/2001 p 01 r 2002-05-30 06:59:00 US/Eastern h QA 76.9 .H85 I591 d OFFS b OFFS
974			8 22796218950006381 f 1 c STATE m ISSUE a 39015058884407 e STATE u mdp.39015058884407 ic 20170831 7 23796218820006381 z v.16 2004 p 01 r 2004-09-08 06:59:00 US/Eastern h QA 76.9 .H85 I591 d OFFS b OFFS
974			8 22796218950006381 f 1 c STATE m ISSUE a 39015048120706 e STATE 7 23796218870006381 z v.11 1998/1999 p 01 r 2000-03-15 05:59:00 US/Eastern h QA 76.9 .H85 I591 d OFFS b OFFS



Ask a Librarian



974	8 22796218950006381 f 1 c STATE m ISSBD a 39015065058698 e STATE 7 23796218800006381 z v.18 2006 p 01 r 2006-03-06 05:59:00 US/Eastern h QA 76.9 .H85 I591 d OFFS b OFFS
974	8 22796218950006381 f 1 c STATE m ISSUE a 39015047806610 e STATE 7 23796218860006381 z v.12 1999/2000 p 01 r 2001-06-13 06:59:00 US/Eastern h QA 76.9 .H85 I591 d OFFS b OFFS
974	8 22796218950006381 f 1 c STATE m ISSUE a 39015048106986 e STATE 7 23796218880006381 z v.10 1998 p 01 r 1999-10-15 06:59:00 US/Eastern h QA 76.9 .H85 I591 d OFFS b OFFS
974	8 22796218950006381 f 1 c STATE m ISSUE a 39015040317144 e STATE 7 23796218900006381 z v.8 1996 p 01 r 1998-07-24 06:59:00 US/Eastern h QA 76.9 .H85 I591 d OFFS b OFFS
974	8 22796218950006381 f 1 c STATE m ISSUE a 39015036236274 e STATE 7 23796218910006381 z v.7 1995 p 01 r 1996-12-24 05:59:00 US/Eastern h QA 76.9 .H85 I591 d OFFS b OFFS
974	8 22796218950006381 f 1 c STATE m ISSUE a 39015023316626 e STATE 7 23796218940006381 z v.2-3 1990-1991 p 01 r 1992-08-06 06:59:00 US/Eastern h QA 76.9 .H85 I591 d OFFS b OFFS
974	8 22796218950006381 f 1 c STATE m ISSUE a 39015028292855 e STATE 7 23796218930006381 z v.4-5 1992-1993 p 01 r 1994-06-23 06:59:00 US/Eastern h QA 76.9 .H85 I591 d OFFS b OFFS

[Give feedback about this page](#) 

[Home](#)

[Accessibility](#)

[Tips for Using Library Search](#)

[Get research help](#)

[About Library Search](#)

[Make an I.L.L. Request](#)

©2023 Regents of the University of Michigan. For details and exceptions, see the [Copyright Policy](#).



Ask a Librarian



APPENDIX

1011F

APPENDIX 1011F

Citations to Zhou

Source Document

Zhou, Z., Cheok, A. D., Yang, X., & Qiu, Y., (2004, October), An experimental study on the role of software synthesized 3D sound in augmented reality environments, *Interacting with Computers*, vol. 16, issue 5, pp. 989-1016.

Citations to Zhou, 2006-2010 (in chronological order)

Cunningham, S., Grout, V., & Hebblewhite, R. (2006, October). Computer game audio: the unappreciated scholar of the half-life generation. *Audio-Mostly 2006*, pp. 9-14.

Burke, J. L., Prewett, M. S., Gray, A. A., Yang, L., Stilson, F. R., Coover, M. D., ... & Redden, E. (2006, November). Comparing the effects of visual-auditory and visual-tactile feedback on user performance: a meta-analysis. In *Proceedings of the 8th international conference on Multimodal interfaces* (pp. 108-117).

Mariette, N. (2006, November). A novel sound localization experiment for mobile audio augmented reality applications. In *International Conference on Artificial Reality and Telexistence* (pp. 132-142). Springer, Berlin, Heidelberg.

Anastassova, M. (2006, December). *L'analyse ergonomique des besoins en amont de la conception de technologies émergente: le cas de la Réalité Augmentée pour la formation à la maintenance automobile* (Doctoral dissertation, Université René Descartes-Paris V).

Segovia, K. Y., Bailenson, J. N., & Monin, B. (2010, May). Morality in tele-immersive environments. In *2nd International ICST Conference on Immersive Telecommunications*.

Yu, L. C., Hsia, H. P., Yi, L. J., & Chia, L. H. (2010, June). Study on Augmented Reality as a Teaching Aid for Handicapped Children. In *Advanced Measurement and Test—Proceedings of 2010 International Conference on Advanced Measurement and Test (AMT 2010)*.



Articles

About 26 results (0.06 sec)

Any time

Since 2023

Since 2022

Since 2019

Custom range...

Sort by relevance

Sort by date

☒ Create alert

[An experimental study on the role of software synthesized 3D sound in augmented reality environments](#)

☐ Search within citing articles

[Comparing the effects of visual-auditory and visual-tactile feedback on user performance: a meta-analysis](#)

JL Burke, [MS Prewett](#), AA Gray, L Yang... - *Proceedings of the 8th ...*, 2006 - dl.acm.org

In a meta-analysis of 43 studies, we examined the effects of multimodal feedback on user performance, comparing visual-auditory and visual-tactile feedback to visual feedback ...

☆ Save [Cite](#) Cited by 304 [Related articles](#) [All 4 versions](#)

[Compensating for distance compression in audiovisual virtual environments using incongruence](#)

[\[PDF\]](#) cardiff.ac.uk

[DJ Finnegan](#), [E O'Neill](#), [MJ Proulx](#) - ... of the 2016 CHI Conference on ..., 2016 - dl.acm.org

A key requirement for a sense of presence in Virtual Environments (VEs) is for a user to perceive space as naturally as possible. One critical aspect is distance perception. When ...

☆ Save [Cite](#) Cited by 54 [Related articles](#) [All 11 versions](#)

[\[HTML\] Designing and implementing interactive and realistic augmented reality experiences](#)

[\[HTML\]](#) springer.com

[A Montero](#), [T Zarraonandia](#), [P Diaz](#), [I Aedo](#) - *Universal Access in the ...*, 2019 - Springer

In this paper, we propose an approach for supporting the design and implementation of interactive and realistic Augmented Reality (AR). Despite the advances in AR technology ...

☆ Save [Cite](#) Cited by 26 [Related articles](#) [All 6 versions](#)

[Using audio reverberation to compensate distance compression in virtual reality](#)

[\[PDF\]](#) nctu.edu.tw

YH Huang, [R Venkatakrishnan](#)... - *ACM Symposium on ...*, 2021 - dl.acm.org

Virtual Reality (VR) technologies are increasingly being applied to various contexts like those gaming, therapy, training, and education. Several of these applications require high ...

☆ Save [Cite](#) Cited by 3 [Related articles](#) [All 3 versions](#)

[\[HTML\] Interaction between auditory and visual perceptions on distance estimations in a virtual environment](#)

[\[HTML\]](#) sciencedirect.com



Articles

4 results (0.03 sec)

Any time

Since 2023

Since 2022

Since 2019

Custom range...

2006 — 2006

Search

Sort by relevance

Sort by date

Create alert

An experimental study on the role of software synthesized 3D sound in augmented reality environments

☐ Search within citing articles

Comparing the effects of visual-auditory and visual-tactile feedback on user performance: a meta-analysis

JL Burke, [MS Prewett](#), AA Gray, L Yang... - [Proceedings of the 8th ...](#), 2006 - [dl.acm.org](#)

In a meta-analysis of 43 studies, we examined the effects of multimodal feedback on user performance, comparing visual-auditory and visual-tactile feedback to visual feedback ...

☆ Save Cite Cited by 304 Related articles All 4 versions

[\[PDF\] Computer game audio: the unappreciated scholar of the half-life generation](#)

[\[PDF\] psu.edu](#)

[S Cunningham](#), [V Grout](#), R Hebblewhite - [Audio-Mostly](#) 2006, 2006 - [Citeseer](#)

Audio has been present in computer games from the original sinusoidal beeps in Pong to the Grand Theft Auto soundtracks recorded by world-famous musical artists. Far from being ...

☆ Save Cite Cited by 24 Related articles All 4 versions

L'analyse ergonomique des besoins en amont de la conception de technologies émergente: le cas de la Réalité Augmentée pour la formation à la maintenance ...

[\[PDF\] hal.science](#)

[M Anastassova](#) - 2006 - [theses.hal.science](#)

L'objectif de cette thèse est de comparer les apports et les limites de différentes méthodes d'analyse des besoins ergonomique en amont de la conception d'une technologie ...

☆ Save Cite Cited by 45 Related articles All 6 versions

A novel sound localization experiment for mobile audio augmented reality applications

[\[PDF\] academia.edu](#)

[N Mariette](#) - [Advances in Artificial Reality and Tele-Existence ...](#), 2006 - [books.google.com](#)

This paper describes a subjective experiment in progress to study human sound localization using mobile audio augmented reality systems. The experiment also serves to validate a ...

☆ Save Cite Cited by 11 Related articles All 10 versions

Any time

Since 2023

Since 2022

Since 2019

Custom range...

2010 — 2010

Search

Sort by relevance

Sort by date

Create alert

An experimental study on the role of software synthesized 3D sound in augmented reality environments

☐ Search within citing articles

Morality in tele-immersive environments

KY Segovia, JN Bailenson, B Monin - 2nd International ICST Conference ..., 2010 - eudl.eu

Humans are spending an increasing amount of time in tele-immersive environments interacting with avatars or virtual human bodies. Additionally, human behavior and cognition ...

☆ Save Cite Cited by 14 Related articles All 11 versions

[PDF] eudl.eu

Study on augmented reality as a teaching aid for handicapped children

CY Lin, PH Hung, JY Lin, HC Lun - Key Engineering Materials, 2010 - Trans Tech Publ

This study looked at the use of augmented reality to combine real scenery with virtual sound to improve the interactivity of teaching aid and provide handicapped children with a more ...

☆ Save Cite Cited by 5 Related articles

[PDF] Study on Augmented Reality as a Teaching Aid for Handicapped Children

LINC Yu, HP Hsia, LINJ Yi, LUNH Chia - Advanced Measurement and Test ..., 2010 - Citeseer

This study looked at the use of augmented reality to combine real scenery with virtual sound to improve the interactivity of teaching aid and provide handicapped children with a more ...

☆ Save Cite Related articles All 3 versions

[PDF] psu.edu

APPENDIX A

[Library of Congress](#) >> [MARC](#) >> [Understanding MARC](#)

MARC 21 Reference Materials

[Part VII: A Summary of Commonly Used MARC 21 Fields](#)

[Part VIII: A List of Other Fields Often Seen in MARC Records](#)

[Part IX: The Leader](#)

[Part X: Field 008 for Books](#)

Part VII:

A Summary of Commonly Used MARC 21 Fields

This is a summary of the MARC 21 tags used most frequently by libraries in entering their own bibliographic records. For full listings of all MARC 21 tags, indicators, and subfield codes, see *MARC 21 Format for Bibliographic Data*.

In the explanations on these pages:

Tags -- The tags (3-digit numbers) are followed by the names of the fields they represent. In this summary, and in the *MARC 21 Format for Bibliographic Data*, if a tag can appear more than once in one bibliographic record, it is labeled repeatable (R). If it can only be used once, it is labeled non-repeatable (NR). For example, a catalog record can have several subjects, so the tags for subject added entries (6XX) are labeled repeatable (R).

Indicators -- The use of indicators is explained in fields where they are used. Indicators are one-digit numbers. Beginning with the 010 field, in every field -- following the tag -- are two character positions, one for Indicator 1 and one for Indicator 2. The indicators are not actually defined in all fields, however. And it is possible that a 2nd indicator will be used, while the 1st indicator remains undefined (or vice versa). When an indicator is undefined, the character position will be represented by the character # (for blank space).

Subfield codes -- All the data in each field (beginning with the 010 field) is divided into subfields, each of which is preceded by a delimiter-subfield code combination. The most common subfield codes used with each tag are shown. Each subfield code is preceded by the character \$, signifying a delimiter. The name of the subfield follows the code.

In general, every field **MUST** have a subfield 'a' (**\$a**). One exception that is often seen is in Field 020 (ISBN), when the ISBN information (subfield **\$a**) is unavailable but the price (subfield **\$c**) is known. Some subfields are repeatable. In this summary, repeatability is noted for only the more common repeatable subfields.

Examples: Examples follow the explanation for each field. For clarity, one space has

been placed between the tag and the first indicator, one space has been placed between the second indicator and the first delimiter- subfield code, and one space has been inserted between the delimiter-subfield code and the subfield data.

010 Library of Congress Control Number -- (LCCN) (NR, or Not Repeatable)

Indicators undefined.

Subfield used most often:

\$a -- Library of Congress control number

Example: 010 ## \$a ###86000988#

020 International Standard Book Number -- (ISBN) (R, or Repeatable)

Indicators undefined.

Subfields used most often:

\$a -- International Standard Book Number

\$c -- Terms of availability (often a price)

\$z -- Cancelled/invalid ISBN (R)

Example: 020 ## \$a 0877547637

040 Cataloging source -- (NR)

Indicators undefined.

Subfields used most often:

\$a -- Original cataloging agency

\$c -- Transcribing agency

\$d -- Modifying agency (R)

Example: 040 ## \$a DLC
 \$c DLC
 \$d gwhs

100 Main entry -- Personal name -- (primary author) (NR; there can be only one main entry)

Indicator 1: Type of personal name entry element

0 -- Forename

1 -- Surname (this is the most common form)

3 -- Family name

Indicator 2 undefined.

Indicator 2 became obsolete in 1990. Older records may display 0 or 1

Subfields used most often:

\$a -- Personal name

\$b -- Numeration

\$c -- Titles and other words associated with a name (R)

\$q -- Fuller form of name

\$d -- Dates associated with a name (generally, year of birth)

Example: 100 1# \$a Gregory, Ruth W.
 \$q (Ruth Wilhelme),
 \$d 1910-

130 Main entry -- Uniform title -- (NR)

Indicator 1: Nonfiling characters

0-9 -- Number of nonfiling characters present (for initial articles, including spaces)

Indicator 2 undefined.

Indicator 2 became obsolete in 1990. (See 100 above.)

Subfields used most often:

\$a -- Uniform title

\$p -- Name of part/section of a work (R)

\$l -- Language of a work

\$s -- Version

\$f -- Date of a work

Example: 130 0# \$a Bible.
 \$p O.T.
 \$p Psalms.

240 Uniform title (NR)

Indicator 1: Uniform title printed or displayed

0 -- Not printed or displayed

1 -- Printed or displayed (most common)

Indicator 2: Nonfiling characters

0-9 -- Number of nonfiling characters present (for initial articles, including spaces)

Subfields used most often:

\$a -- Uniform title

\$l -- Language of a work

\$f -- Date of a work

Example: 240 10 \$a Ile mystérieuse.
 \$l English.
 \$f 1978

245 Title Statement (NR)

Indicator 1: Title added entry

(Should the title be indexed as a title added entry?)

0 -- No title added entry

(indicates a title main entry; i.e. no author is given)

1 -- Title added entry

(the proper indicator when an author given in 1XX; the most common situation)

Indicator 2: Nonfiling characters

0-9 -- Number of nonfiling characters present, including spaces; usually set at zero, except when the title begins with an article; e.g., for *The robe*, the second indicator would be set to 4. The letters *T*, *h*, *e*, and the space following them are then ignored in alphabetizing titles. The record will be automatically filed under "r" -- for *Robe*.

Subfields used most often:

\$a -- Title proper

\$h -- Medium (often used for non-book media)

\$p -- Name of part/section of a work (R)

\$b -- Reminder of title (subtitles, etc.)

\$c -- Remainder of title page transcription/Statement of responsibility

Example: 245 14 \$a The DNA story :
 \$b a documentary history of gene
 cloning /
 \$c James D. Watson, John Tooze.

246 Varying form of title (R)

Indicator 1: Note/title added entry controller

- 1 -- Note, title added entry
- 3 -- No note, title added entry

Indicator 2: Type of title

- # -- No information provided
- 0 -- Portion of title
- 1 -- Parallel title
- 4 -- Cover title
- 8 -- Spine title

Subfield used most often:

- \$a** -- Title proper

Example: 246 3# \$a Four corners power review

250 Edition statement (NR)*Indicators undefined.**Subfield used most often:*

- \$a** -- Edition statement

Example: 250 ## \$a 6th ed.

260 Publication, distribution, etc. (Imprint) (R)*Indicator 1: Sequence of publishing statements*

- # -- No information provided

*Indicator 2: Undefined**Subfields used most often:*

- \$a** -- Place of publication, distribution, etc. (R)
- \$b** -- Name of publisher, distributor, etc. (R)
- \$c** -- Date of publication, distribution, etc. (R)

Example: 260 ## \$a New York :
 \$b Chelsea House,
 \$c 1986.

300 Physical description (R)

Indicators undefined.

Subfields used most often:

- \$a** -- Extent (number of pages) (R)
- \$b** -- Other physical details (usually illustration information)
- \$c** -- Dimensions (cm.) (R)
- \$e** -- Accompanying material (for example, "teacher's guide" or "manual")

Example: 300 ## \$a 139 p. :
 \$b ill. ;
 \$c 24 cm.

440 Series statement / Added entry--Title

This field was made obsolete in 2008 to simplify the series statement. See 490 and 830.

490 Series statement (No added entry is traced from field) (R)

Indicator 1: Specifies whether series is traced (whether an 8XX tag is also present)

- 0 -- Series not traced
- 1 -- Series traced (8XX is in record)

Indicator 2 undefined.

Subfield used most often:

- \$a** -- Series statement (R)
- \$v** -- Volume number (R)

Example: 490 1# \$a Colonial American craftsmen

500 General note (R)

Indicators undefined.

Subfield used most often:

- \$a** -- General note (Used when no specialized note field has been defined for the information. Examples: Notes regarding the index; the source of the title; variations in title; descriptions of the nature, form, or scope of the item.)

Example: 500 ## \$a Includes index.

504 Bibliography, etc. note (R)

Indicators undefined.
Subfield used most often:
\$a -- Bibliography, etc. note

Example: 504 ## \$a Includes bibliographical
 references.

505 Formatted contents note (R)

Indicator 1: Type of contents note
 0 -- Complete contents
 1 -- Incomplete contents (used with multivolume set when some volumes are not yet published)
 2 -- Partial contents

Indicator 2: Level of content designation
 # -- Basic

Subfield used most often:
\$a -- Formatted contents note

Example: 505 0# \$a Pride and prejudice -- Emma
-- Northanger Abbey.

520 Summary, etc. note (R)

Indicator 1: Display constant controller

- # -- Summary
- 1 -- Review
- 2 -- Scope and content
- 3 -- Abstract

Indicator 2 undefined

Subfields used most often

- \$a** -- Summary, abstract, or annotation
- \$b** -- Expansion of summary note

Example: 520 ## \$a This basic guide to parliamentary
 procedure tells how to conduct
 and participate in a meeting
 properly.

600 Subject added entry -- Personal name (R)

Indicator 1: Type of personal name entry element

- 0 -- Forename
- 1 -- Surname (this is the most common form)
- 3 -- Family name

Indicator 2: Subject heading system/thesaurus (identifies the specific list or file which was used)

- 0 -- Library of Congress Subject Headings
- 1 -- LC subject headings for children's literature
- 2 -- Medical Subject Headings
- 3 -- National Agricultural Library subject authority file
- 4 -- Source not specified
- 5 -- Canadian Subject Headings
- 6 -- Répertoire de vedettes-matière
- 7 -- Source specified in subfield \$2

(Note regarding Sears subject headings: The MARC 21 format does not provide an assigned indicator for Sears subject headings. Therefore, an indicator of 7 is used, and the MARC defined code "sears" is placed in subfield \$2.)

Subfields used most often:

- \$a** -- Personal name (surname and forename)
- \$b** -- Numeration
- \$c** -- Titles and other words associated with a name (R)
- \$q** -- Fuller form of name
- \$d** -- Dates associated with a name (generally, year of birth)
- \$t** -- Title of a work
- \$v** -- Form subdivision (R)
- \$x** -- General subdivision (R)
- \$y** -- Chronological subdivision (R)
- \$z** -- Geographic subdivision (R)
- \$2** -- Source of heading or term (used with 2nd indicator of 7)

Example: 600 10 \$a Shakespeare, William,
 \$d 1564-1616
 \$x Comedies
 \$x Stage history.

Example: 600 10 \$a Shakespeare, William,
 \$d 1564-1616
 \$x Knowledge

\$z Rome \$v Congresses.

Notice that subfields \$v, \$x, and \$z in the 600 field are repeatable. Subfields \$v, \$x, \$y, and \$z do not have to be in alphabetical order. They will be in the order prescribed by the instructions given by the subject heading system.

610 Subject added entry -- Corporate name (R)

Indicator 1: Type of corporate name entry element

- 0 -- Inverted name (not used with AACR2)
- 1 -- Jurisdiction name
- 2 -- Name in direct order

Indicator 2: Subject heading system/thesaurus.

See indicator 2 under 600

Subfields used most often:

- \$a** -- Corporate name or jurisdiction name as entry element
- \$b** -- Subordinate unit (R)
- \$v** -- Form subdivision (R)
- \$x** -- General subdivision (R)
- \$y** -- Chronological subdivision (R)
- \$z** -- Geographic subdivision (R)
- \$2** -- Source of heading or term (used with 2nd indicator of 7)

<i>Example:</i> 610 10 \$a United States. \$b Army Air Forces \$v Biography.
--

650 Subject added entry -- Topical term (Most subject headings fit here.) (R)

Indicator 1: Level of subject

- # -- No information provided

Indicator 2: Subject heading system/thesaurus

(identifies the specific list or file which was used)

- 0 -- Library of Congress Subject Headings
- 1 -- LC subject headings for children's literature
- 2 -- Medical Subject Headings
- 3 -- National Agricultural Library subject authority file
- 4 -- Source not specified
- 5 -- Canadian Subject Headings
- 6 -- Répertoire de vedettes-matière
- 7 -- Source specified in subfield \$2

Note regarding Sears subject headings: The MARC 21 format does not provide an assigned indicator for Sears subject headings. Therefore, an indicator of 7 is used, and the MARC defined code "sears" is placed in subfield \$2.)

Subfields used most often:

- \$a** -- Topical term
- \$v** -- Form subdivision (R)
- \$x** -- General subdivision (R)
- \$y** -- Chronological subdivision (R)
- \$z** -- Geographic subdivision (R)
- \$2** -- Source of heading or term used with 2nd indicator of 7)

Example: 650 #0 \$a Theater
 \$z United States
 \$v Biography
 \$v Dictionaries.

Notice that subfields \$v, \$x, and \$z in the 650 field are repeatable. Subfields \$v, \$x, \$y, and \$z do not have to be in alphabetical order. They will be in the order prescribed by the instructions given by the subject heading system.

651 Subject added entry -- Geographic name (R)

Indicator 1: undefined.

Indicator 2: Subject heading system/thesaurus.

See indicator 2 under 600

Subfields used most often:

- \$a** -- Geographic name
- \$v** -- Form subdivision (R)
- \$x** -- General subdivision (R)
- \$y** -- Chronological subdivision (R)
- \$z** -- Geographic subdivision (R)
- \$2** -- Source of heading or term (used with 2nd indicator of 7)

Example: 651 #0 \$a United States
 \$x History
 \$v Chronology.

Notice that subfields \$v, \$x, and \$z in the 651 field are repeatable. Subfields \$v, \$x, \$y, and \$z do not have to be in alphabetical order. They will be in the order prescribed by the instructions given by the subject heading system.

700 Added entry -- Personal name (R)

Indicator 1: Type of personal name entry element

- 0 -- Forename
- 1 -- Surname (this is the most common form)
- 3 -- Family name

Indicator 2: Type of added entry

- # -- No information provided (most common; co-authors, editors, etc.)
- 2 -- Analytical entry (The values for Indicator 2 changed in 1994 with Format Integration, and older records may display additional values. An analytical entry involves an author/title of an item contained in a work.)

Subfields used most often:

- \$a** -- Personal name
- \$b** -- Numeration
- \$c** -- Titles and other words associated with a name (R)
- \$q** -- Fuller form of name
- \$d** -- Dates associated with a name (generally, year of birth)
- \$e** -- Relator term (such as ill.) (R)
- \$4** -- Relator code (R)

Example: 700 1# \$a Baldrige, Letitia.

710 Added entry -- Corporate name (R)

Indicator 1: Type of corporate name entry element

- 0 -- Inverted name (not used with AACR2)
- 1 -- Jurisdiction name
- 2 -- Name in direct order

Indicator 2: Type of added entry.

- See Indicator 2 under 700
- # -- No information provided
- 2 -- Analytical entry

Subfields used most often:

- \$a** -- Corporate name or jurisdiction name as entry element
- \$b** -- Subordinate unit (R)

Example: 710 2# \$a Sunburst Communications (Firm)

740 Added entry -- Uncontrolled related/analytical title (R)

Indicator 1: Nonfiling characters

0-9 -- Number of nonfiling characters present (for initial articles, including spaces)

Indicator 2: Type of added entry. See Indicator 2 under 700

-- No information provided

2 -- Analytical entry

(This field was redefined in 1994 with Format Integration. Prior to 1994, the field was also used for variant titles, such as a different wording on a spine title. In records created since Format Integration, those variant titles appear in a 246 field.)

Subfield used most often:

\$a -- Title

Example: 740 02 \$a Uncle Vanya.

800 Series added entry -- Personal name (R)

Indicator 1: Type of personal name entry element

0 -- Forename

1 -- Surname

3 -- Family name

Indicator 2 undefined.

Subfields used most often:

\$a -- Personal name

\$b -- Numeration

\$c -- Titles and other words associated with a name (R)

\$q -- Fuller form of name

\$d -- Dates associated with a name (generally, year of birth)

\$t -- Title of a work (the series)

\$v -- Volume number

Example: 800 1# \$a Fisher, Leonard Everett.
 \$t Colonial American craftsmen.

830 Series added entry -- Uniform title (R)

Indicator 1 undefined.

Indicator 2: Nonfiling characters

0-9 -- Number of nonfiling characters present (for initial articles, including spaces)

Subfield used most often:

\$a -- Uniform title

\$v -- Volume number

Example: 830 #0 \$a Railroads of America (Macmillan)

[[Back to Top of Page](#)]

Part VIII:

A List of Other Fields Often Seen in MARC Records

001	Control number
003	Control number identifier
005	Date and time of latest transaction
006	Fixed-length data elements -- additional material characteristics
007	Physical description fixed field
008	Fixed length data elements (See Part X)
022	International Standard Serial Number (ISSN)
037	Source of acquisition
041	Language code
043	Geographic area code
050	Library of Congress call number
060	National Library of Medicine call number
082	Dewey Decimal classification number (the one recommended by the Library of Congress; locally-assigned call numbers may appear elsewhere)
110	Main entry -- Corporate name (less frequent under AACR2 rules)
256	Computer file characteristics
263	Projected publication date (indicates a CIP -- Cataloging in Publication -- record)
306	Playing time
508	Creation/production credits note
510	Citation/references note (review sources)
511	Participant or performer note
521	Target audience note (first indicator: 0 = reading grade level, 1 = interest age level, 2 = interest grade level, 3 = special audience characteristics, 4 = motivation interest level)
530	Additional physical form available note
538	System details note
586	Awards note
656	Index term -- Occupation
730	Added entry -- Uniform title
852	Location

- 856 Electronic location and access
 9XX Reserved for local use. (They are used by vendors, systems, or individual libraries to exchange additional data)

[[Back to Top of Page](#)]

Part IX:

The Leader

There are 24 positions in the Leader, numbered from 00 to 23. For fuller explanation, see the *MARC 21 Format for Bibliographic Data*.

- 00-04 Record length (calculated by the computer for each record)
 05 Record status
 a = increase in encoding level
 c = corrected or revised
 d = deleted
 n = new
 p = increase in encoding from prepublication (previous CIP)
 06 Type of record
 a = language material
 c = printed music
 d = manuscript music
 e = cartographic material
 f = manuscript cartographic material
 g = projected medium
 i = nonmusical sound recording
 j = musical sound recording
 k = 2-dimensional nonprojectable graphic
 m = computer file
 o = kit
 p = mixed materials
 r = 3-dimensional artifact or naturally occurring object
 t = manuscript language material
 07 Bibliographic level
 a = monographic component part
 b = serial component part
 c = collection
 d = subunit
 i = integrating resource
 m = monograph/item
 s = serial
 08 Type of control
 # = no specified type
 a = archival

- 09 **Character coding scheme**
 - # = MARC-8
 - a = UCS/Unicode
- 10 **Indicator count** (always "2")
- 11 **Subfield code count** (always "2")
- 12-16 **Base address of data** (calculated by the computer for each record)
- 17 **Encoding level**
 - # = full level
 - 1 = full level, material not examined
 - 2 = less-than-full level, material not examined
 - 3 = abbreviated level
 - 4 = core level
 - 5 = partial (preliminary) level
 - 7 = minimal level
 - 8 = prepublication level (CIP)
 - u = unknown
 - z = not applicable
- 18 **Descriptive cataloging form**
 - # = non-ISBD
 - a = AACR2
 - i = ISBD
 - u = unknown
- 19 **Multipart resource record level**
 - # = Not specified or not applicable
 - a = Set
 - b = Part with independent title
 - c = Part with dependent title
- 20 **Length of the length-of-field portion** (always "4")
- 21 **Length of the starting-character-position portion** (always "5")
- 22 **Length of the implementation-defined portion** (always "0")
- 23 **Undefined** (always "0")

[\[Back to Top of Page \]](#)

Part X:

Field 008 for Books

Field 008 is used for Fixed Length Data Elements ("Fixed Field Codes"). There are 40 character positions in field 008, numbered from 00-39. Undefined positions must contain either a blank (#) or a fill character (|). Positions 00-17 and 35-39 are defined the same way for all media.

The information shown here for positions 18-34 applies only to books. For explanation of all the positions below and for positions 18-34 for other media, see the *MARC 21 Format*

for Bibliographic Data.

Note that field 008 has no indicators or subfield codes.

- 00-05 Date entered on file (YYMMDD),
where Y=year, M=month, and D=day
- 06 Type of date/publication status:
 b = no dates given; B.C. date involved
 e = detailed date
 s = single known date/probable date
 m = multiple dates
 r = reprint/reissue date (Date 1) and original date (Date 2)
 n = dates unknown
 q = questionable date
 t = publication date and copyright date
 | = no attempt to code
- 07-10 Date 1/beginning date of publication
- 11-14 Date 2/ending date of publication

Date fields contain the year(s) of publication. The type of date(s) in these elements are specified in fixed field element 06: Type of date/publication status. (For further details, see the field 008 description in the *MARC 21 Format for Bibliographic Data*.)

- 15-17 Place of publication, production, or execution
 For example:
 pk# = Pakistan
 cau = California (US)

(For a full list of codes used in these positions, see the [MARC Code List for Countries](#).)

- 18-21 Illustrations (up to 4 codes):
 # = no illustrations
 a = illustrations
 b = maps
 c = portraits
 d = charts
 e = plans
 f = plates
 g = music
 h = facsimiles
 i = coats of arms
 j = genealogical tables
 k = forms
 l = samples
 m = phonodisc, phonowire, etc.
 o = photographs
 p = illuminations
 | = no attempt to code

- 22 **Target audience:**
 # = unknown or not specified
 a = preschool
 b = primary
 c = pre-adolescent
 d = adolescent
 e = adult
 f = specialized
 g = general
 j = juvenile
 | = no attempt to code
- 23 **Form of item:**
 # = none of the following
 a = microfilm
 b = microfiche
 c = microopaque
 d = large print
 f = braille
 r = regular print reproduction
 s = electronic
 | = no attempt to code
- 24-27 **Nature of contents (up to 4):**
 # = no specified nature of contents
 a = abstracts/summaries
 b = bibliographies (is one or contains one)
 c = catalogs
 d = dictionaries
 e = encyclopedias
 f = handbooks
 g = legal articles
 i = indexes
 j = patent document
 k = discographies
 l = legislation
 m = theses
 n = surveys of literature
 o = reviews
 p = programmed texts
 q = filmographies
 r = directories
 s = statistics
 t = technical reports
 u = standards/specifications
 v = legal cases and notes
 w = law reports and digests
 z = treaties
 | = no attempt to code

- 28 **Government publication:**
 # = not a government publication
 i = international intergovernmental
 f = federal/national
 a = autonomous or semi-autonomous component
 s = state, provincial, territorial, dependent, etc.
 m = multistate
 c = multilocal
 l = local
 z = other type of government publication
 o = government publication -- level undetermined
 u = unknown if item is government publication
 | = no attempt to code
- 29 **Conference publication:**
 0 = not a conference publication
 1 = conference publication
 | = no attempt to code
- 30 **Festschrift:**
 0 = not a festschrift
 1 = festschrift
 | = no attempt to code
- 31 **Index:**
 0 = no index
 1 = index present
 | = no attempt to code
- 32 **Undefined (since 1990)** (Earlier records may contain the values 0 or 1)
 # = Undefined
 | = no attempt to code
- 33 **Literary form:**
 0 = not fiction (not further specified)
 1 = fiction (not further specified)
 c = comic strips
 d = dramas
 e = essays
 f = novels
 h = humor, satires, etc.
 i = letters
 j = short stories
 m = mixed forms
 p = poetry
 s = speeches
 u = unknown
 | = no attempt to code
- 34 **Biography:**
 # = no biographical material
 a = autobiography
 b = individual biography

- c = collective biography
- d = contains biographical information
- | = no attempt to code

35-37 Language:

A three-letter code. For example: eng fre ger spa rus ita

(For a full list of codes used in these positions, see the [MARC Code List for Languages](#).)

38 Modified record:

- # = not modified
- x = missing characters (because of characters unavailable in MARC character set)
- s = shortened
- d = "dashed-on" information omitted
- r = completely romanized/printed cards in script
- o = completely romanized/printed cards romanized
- | = no attempt to code

39 Cataloging source:

- # = national bibliographic agency
- c = cooperative cataloging program
- d = other sources
- u = unknown
- | = no attempt to code

[[Back to Top of Page](#)]

[[Back to Table of Contents](#)] -- [[Continue to Part 11](#)]



Library of Congress

[Library of Congress Help Desk](#) (10/27/2009)