


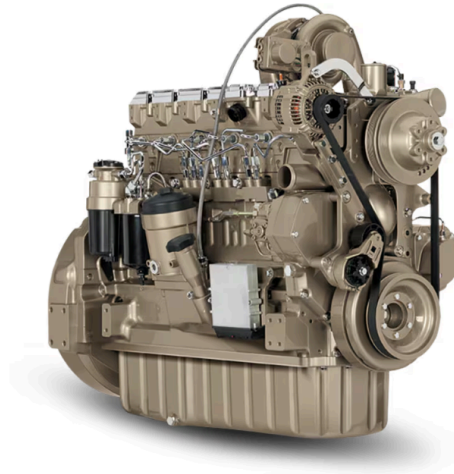

6090HF485

9.0L Industrial Diesel Engine

- 9.0L PowerTech™ Plus
- 168 - 298 kW (225 - 400 hp)

[Contact a Distributor](#)[Tier 3 Brochure](#) >[Tier 3 Selection Guide](#) >[Power Connect](#) >[Share](#)[Print](#)

Features

Specifications

Features

— 4-valve cylinder head

- The 4-valve cylinder head provides excellent airflow resulting in greater low-speed torque and better transient response. New 4-valve U-flow head design

— High-pressure common-rail (HPCR) and engine control unit (ECU)

- The HPCR fuel system provides variable common-rail pressure, multiple injections, and higher injection pressures, up to 1600 bar (23,000 psi). It also controls fuel injection timing and provides precise control for the start, duration, and end of the injection

— Cooled exhaust gas recirculation (EGR)

- EGR cools and mixes measured amounts of cooled exhaust gas with incoming fresh air to lower peak combustion temperatures, thereby reducing NOx

— Variable geometry turbocharger (VGT)

- Varies exhaust pressure based on load and speed to insure proper EGR flow; greater low-speed torque, quicker transient response, higher peak torque, and best-in-class fuel economy.

— Air-to-air aftercooled

- This is the most efficient method of cooling intake air to help reduce engine emissions while maintaining low-speed torque, transient response time, and peak torque. It enables an engine to meet emissions regulations with better fuel economy and the lowest installed costs

— Compact size

- Horsepower/displacement ratio is best-in-class
- Lower installed cost
- Mounting points are the same as Tier 2/Stage II engine models

— Engine performance

- Multiple rated speeds to further reduce noise and improve fuel economy
- New higher peak torque ratings
- Better transient response time
- Greater levels of low speed torque
- Higher levels of power bulge

— John Deere electronic engine controls

- Electronic engine controls monitor critical engine functions, providing warning and/or shutdown to prevent costly engine repairs and eliminate the need for add-on governing components all lowering total installed costs. Snapshot diagnostic data that can be retrieved using commonly available diagnostic service tools
- Controls utilize new common wiring interface connector for vehicles or available OEM instrumentation packages; new solid conduit and "T" connectors to reduce wiring stress and provide greater durability and improved appearance
- Factory-installed, engine mounted ECU or remote-mounted ECU comes with wiring harness and associated components. Industry-standard SAE J1939 interface communicates with other vehicle systems, eliminating redundant sensors and reducing vehicle installed cost

— Additional features

- Gear-driven auxiliary drives
- 500-hour oil change
- Self-adjusting poly-vee fan drive
- Single-piece low friction piston
- Optional rear PTO
- Low-pressure fuel system with "auto-prime" feature
- Directed top-liner cooling

[Show Less](#)

Specifications

Emissions Certifications


✕ Export to Excel

Less Regulated	
Tier 3	
Stage IIIA equivalent	

General engine data

Model	6090HF485
Number of cylinders	6
Displacement-- L (cu in)	9 (549)
Bore and Stroke-- mm (in)	118.4 x 136.0 (4.66 x 5.35)
Compression Ratio	16.0 : 1
Engine Type	In-line, 4-Cycle
Aspiration	Turbocharged and air-to-air aftercooled
Length - mm (in)	1208 (47.6)
Width-- mm (in)	630 (24.8)
Height-- mm (in)	1113 (43.8)
Weight, dry - kg (lb)	901 (1986)

Show More

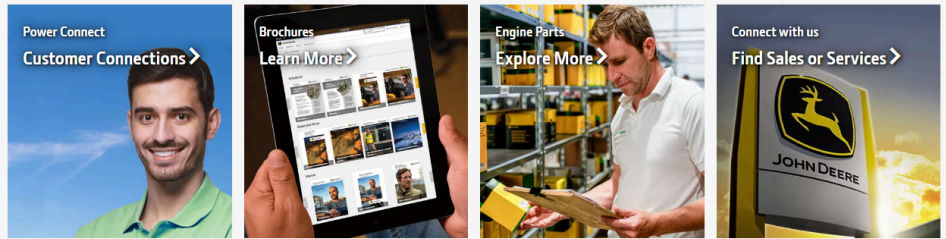

Products & Support

Equipment
Buy Parts
Find a Dealer
Order Online
Build Your Own

Company Information

Careers
Ethics & Compliance
Governance

News & Publications

John Deere News
The Furrow
The Dirt
The Landing
Power Connect

Connect with John Deere

Factory Tours
John Deere Historic Site
John Deere Pavilion
John Deere Tractor & Engine Museum
John Deere Kids
John Deere Rewards
Buy Merchandise

United States

[Site Map](#) [Privacy and Data](#) [Cookie Statement](#) [Terms of Use](#) [Accessibility](#) [Contact Us](#)

[Cookie Preferences](#)

Copyright © 2024 Deere & Company. All Rights Reserved.

